

**NATIONAL REGISTER OF HISTORIC PLACES  
INVENTORY – NOMINATION FORM**

**EAST END HISTORIC DISTRICT  
NEWBURGH, NEW YORK**

Broadway Corridor extends circa 2.7mi from current district bounds to the City border



**East End Proposed District Expansion**

United States Department of the Interior  
National Park Service

For NPS use only

National Register of Historic Places  
Inventory—Nomination Form

received

date entered

See instructions in *How to Complete National Register Forms*  
Type all entries—complete applicable sections

1. Name

historic

and/or common East End Historic District

2. Location

street & number Multiple \_\_\_\_\_ not for publication

city, town Newburgh \_\_\_\_\_ vicinity of

state New York code 036 county Orange code 071

3. Classification

<b>Category</b>	<b>Ownership</b>	<b>Status</b>	<b>Present Use</b>	
<input checked="" type="checkbox"/> district	<input type="checkbox"/> public	<input checked="" type="checkbox"/> occupied	<input type="checkbox"/> agriculture	<input checked="" type="checkbox"/> museum
<input type="checkbox"/> building(s)	<input type="checkbox"/> private	<input checked="" type="checkbox"/> unoccupied	<input checked="" type="checkbox"/> commercial	<input checked="" type="checkbox"/> park
<input type="checkbox"/> structure	<input checked="" type="checkbox"/> both	<input checked="" type="checkbox"/> work in progress	<input checked="" type="checkbox"/> educational	<input checked="" type="checkbox"/> private residence
<input type="checkbox"/> site	<b>Public Acquisition</b>	<b>Accessible</b>	<input type="checkbox"/> entertainment	<input checked="" type="checkbox"/> religious
<input type="checkbox"/> object	<input checked="" type="checkbox"/> NA in process	<input type="checkbox"/> yes: restricted	<input checked="" type="checkbox"/> government	<input type="checkbox"/> scientific
	<input checked="" type="checkbox"/> NA being considered	<input checked="" type="checkbox"/> yes: unrestricted	<input checked="" type="checkbox"/> industrial	<input type="checkbox"/> transportation
		<input type="checkbox"/> no	<input type="checkbox"/> military	<input type="checkbox"/> other:

4. Owner of Property

name multiple ownership

street & number NA

city, town NA \_\_\_\_\_ vicinity of state

5. Location of Legal Description

courthouse, registry of deeds, etc. Orange County Courthouse

street & number

city, town Goshen state New York

6. Representation in Existing Surveys

title New York Statewide Inventory, 1985  
(Portions of the district previously entered on the National Register - see date Item No. 7) has this property been determined eligible? \_\_\_\_\_ yes  no  
\_\_\_\_\_ federal  state \_\_\_\_\_ county \_\_\_\_\_ local

depository for survey records N.Y.S. Division for Historic Preservation

city, town Albany state New York

# 7. Description

<b>Condition</b>		<b>Check one</b>	<b>Check one</b>
<input type="checkbox"/> excellent	<input checked="" type="checkbox"/> deteriorated	<input checked="" type="checkbox"/> unaltered	<input checked="" type="checkbox"/> original site
<input checked="" type="checkbox"/> good	<input type="checkbox"/> ruins	<input checked="" type="checkbox"/> altered	<input type="checkbox"/> moved
<input checked="" type="checkbox"/> fair	<input type="checkbox"/> unexposed		date <u>N.A.</u>

## **Describe the present and original (if known) physical appearance**      Location and Setting

The City of Newburgh, New York population 23,000, is situated in the mid Hudson Valley just above the Hudson Highlands and approximately 60 miles north of New York City. The city is sited on the west bank of the river with its densely built-up areas now occupying approximately two square miles of level and hilly terrain 500 to 1000 feet west of the river bank. The existing street pattern of the city was firmly established in the early nineteenth century and follows a typical and fairly regular north-south and east-west grid pattern. The city's principal streets in its eastern end are Broadway, a broad east-west commercial artery which divides the city into a north and south half, and Liberty Street, a continuous north-south residential street which intersects Broadway at the heart of the city's oldest section. In the center of the city, development is relatively dense with buildings rarely exceeding four stories in height in commercial districts or three in the residential neighborhoods. A handful of church towers and spires punctuate the low-rise profile of the city in scattered locations. Brick is the predominant building material in much of the city and the historic district. Although important buildings and neighborhoods exist from earlier and later periods of significance, the overall character of the city reflects its prosperity as a manufacturing center, especially during the second half of the nineteenth century.

The East End Historic District includes the core of the present city of Newburgh and most of the area developed by the end of the nineteenth century. Geographically, it includes approximately 445 acres and represents about one third of the incorporated city. There are 2452 contributing features dating until 1935. These include 2440 contributing buildings, 16 contributing structures and 6 contributing objects. There are 71 non-contributing primary buildings. Numerous non-contributing outbuildings are noted in the building list. (A total of 225 of the contributing buildings listed above have been previously listed on the National Register individually or as contributing parts of the Montgomery-Grand-Liberty Street Historic District, as explained below.)

2452  
- 225  
-----  
2227

### Boundaries

The boundaries of the East End Historic District have been established so as to include the largest concentration of intact and significant resources that illustrate the evolution and development of Newburgh during its 1750-1930 period of significance. In general terms the boundaries are defined by the modern portions of Mount Saint Mary's college campus and the city limits to the north, undistinguished early twentieth century housing and modern condominiums at the northeast, and a combination of vacant land and modern apartment house development to the east, the result of extensive urban renewal activities during the 1960's and 1970's. At the southeast, the boundary was drawn to include several historic industrial plants and a late nineteenth century neighborhood, while excluding additional vacant land and a modern gas plant directly to the east. At the south, the boundary follows the top of a high bluff which historically prevented any further urban expansion in this direction. Southwest of the historic district, the boundary excludes a combination of modern residential development, non-historic, low-rise

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh,  
Continuation sheet Orange Co., New York

Item number 7

Page 2

For NPS use only

received

date entered

industrial buildings and a 1936 public school with extensive modern additions. The western boundary separates concentrations of historic and relatively intact commercial, residential and religious properties from similar but heavily altered properties and more recent, and less architecturally significant properties further west. At the northeast, the district boundary follows the west and north boundaries of historic Downing Park, excluding more recent twentieth-century suburban development north of South Street and west of DuBois Street north of the park. The district boundaries incorporate all of the Montgomery-Grand-Liberty Streets Historic District (National Register listed 1973) as well as two individually listed properties outside of that district: Washington's Headquarters (NHL 1972) and the New York State Armory, (National Register listed, 1981). The large historic district documented by this nomination is the result of additional historical research and a comprehensive understanding of Newburgh's development and architectural heritage resulting from an extensive historic resources survey undertaken between 1978 and 1985.

In addition to the attached map of the historic district, the specific boundaries of the district are described in detail in Item 10, Verbal Boundary Description and Justification.

Development Patterns and Architectural Characteristics

The East End Historic District includes a diversity of architectural and development patterns spanning the 1750-1935 period of significance. These patterns can be discussed geographically within the historic district, recognizing that few of the individual neighborhoods or zones discussed below are entirely homogeneous and that most of the transitions between them, are blurred reflecting variations in land and building use, density, period, architectural styles and social status.

The civic and institutional heart of the present-day city of Newburgh occurs near the center of the East End Historic District at the lower (eastern) end of Broadway and along Liberty and Grand Streets between Broadway and Third Street. Clustered around the intersection of Broadway, Liberty and Grand Streets stand a series of four-story, turn-of-the-century commercial buildings including the richly detailed Beaux-Arts classical Columbus Trust Company Bank (now Key Bank), built in 1902, and the imposing Neoclassical Newburgh Savings Bank (Albany Savings Bank) at 94 Broadway, built c. 1920 (fig. 1). A third bank building with an arcaded limestone facade occurs a short distance away at 45-47 Grand Street and also dates from c. 1920 (fig. 2). Across Grand Street, two large and similarly detailed Neoclassical institutional buildings contribute to the civic and institutional character of this area: the 1915 Masonic Temple and the 1913 YMCA building, located at 46-52 and 54 Grand Street, respectively (fig. 3). An unusually distinguished American Legion Post building is located next door at 60-62

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh,

Continuation sheet Orange Co., New York

Item number

7

Page

3

For NPS use only

received

date entered

Grand Street. Built in the 1930's, the building features a brick and limestone facade designed in a modernized version of Neoclassicism with Art Deco style references. The historic Newburgh Free Library, built in 1876 and designed in the Venetian Gothic style by noted New York City architect John A. Wood, who began his career in Newburgh (and Poughkeepsie), is located further north at 100-102 Grand Street (fig. 4). The 1841 County Courthouse, designed by native architect Thornton M. Niven, is located at 127 Grand Street and is complemented by Alexander Jackson Davis's monumental Greek Revival style Protestant Reformed Dutch Church, completed in 1838, at 150 Grand Street. Immediately west of the courthouse at 217 Liberty Street stands the distinguished Neo-Georgian Newburgh Post Office, built c. 1920 (fig. 5).

In addition to the Protestant Reformed Church, other major churches built in this immediate vicinity include the Georgian style St. George's Episcopal Church at 117-119 Grand Street, built in 1819, the Federal style First Associate Reformed Church at Grand Street and First, built in 1821 (fig. 6), and the Gothic Revival style St. Patrick's Roman Catholic Church and Second Empire style priory, built in 1860 (fig. 2). The eight-story Washington Hotel at 90-96 First Street, built c. 1930, is located at the corner of First and Grand and is one of only two large hotels to survive in the historic district (figs. 4 & 7). The smaller Hotel Newburgh, located nearby at 111-117 Broadway, is a non-contributing element of the historic district due to extensive non-historic additions and facade alterations (fig. 14).

North of the civic and institutional core of the city in the vicinity of Grand Street and Liberty Street, Broadway becomes the city's principal retail district, composed primarily of two- and three-story brick buildings with first floor storefronts and upper story offices and apartments. Broadway's 130-foot width and intensive commercial development along its north and south sides within the historic district distinguish it from the narrower residential streets which it separates to the north and south. Ascending by a series of alternating grades and terraces as it proceeds from east to west, Broadway offers striking and unobstructed vistas of the Hudson River and the mountains east of the river (fig. 8). Historic architecture along Broadway ranges in date from the 1840's through the 1930's, with a predominance of three-story Italianate style commercial buildings with bracketed cornices and segmentally arched windows exemplified by the row at 156-166 Broadway (fig. 14), and a smaller number of distinctive three-story Second Empire style commercial buildings with dormered, mansard roofs exemplified by both 218 and 242 Broadway (fig. 11), both types dating from the 1860's through the 1880's. Scattered among the rows of Post Civil War era commercial buildings are simple two- and three-story gabled, frame or brick buildings dating from the first half of the nineteenth century, many of which show evidence of later nineteenth and twentieth century alterations (fig. 12). One of the major landmarks on Broadway is the Old Newburgh Armory

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh,  
Continuation sheet Orange Co., New York

Item number 7

Page 4

For NPS use only

received

date entered

at Broadway and Johnson, designed by John A. Wood in an imposing castellated style and completed in 1880 (fig.15; National Register listed, 1981). A second major element in the Broadway streetscape, distinguished by its tall, crenellated brick tower, is the Church of the Good Shepherd, built in 1890 at the southeast corner of Broadway and Mill Street, designed by New York City architect Frank Wright in a modified Gothic style (fig.10).

The early twentieth century is represented on Broadway by the former Salvation Army Building at 173 Broadway, designed c. 1910 in a modified Dutch Renaissance style featuring a distinctive arched second story, windows with splayed lintels at the third story and a stepped gable parapet (fig.15), and by the Broadway Garage at 259 Broadway, built in 1930 as a modern auto showroom for Newburgh's principal Buick dealership (fig.10). The one-story building features simplified classical features, such as panelled pilasters and an arched entrance composition, and is faced in Indiana limestone and Rockport granite. It retains an exceptional degree of integrity unusual for this building type.

Three buildings on Broadway represent the Art Deco period of the 1930's. The Kreisel Furniture Store at 121-123 Broadway, built c. 1932, is an unusually handsome and intact example of the style, featuring a two-story facade with a bronzed mullion design radiating outward above its center entrance and bronzed keystone and splayed voussoirs forming a distinctive architrave above the second story windows (fig.18). At 177-179, the Clark Street Diner, built c. 1935, represents Newburgh's only example of a streamlined, Art Deco style diner, complete with chromed exterior and ribbon windows. The c. 1935 F.W. Woolworth store at 128-130 also contributes significantly to the district as an intact and representative example of retail chain commercial architecture of the 1930's (fig.17).

The historic district is largely residential in character north of Broadway and can be considered to include four distinct neighborhoods. The first of these neighborhoods is centered in the Montgomery Street, Grand Street and Liberty Street area between First Street and Broad Street, essentially including the area within the Montgomery-Grand-Liberty Street Historic District. This area represents Newburgh's finest residential neighborhood and includes a heavy concentration of picturesque-era architecture of the 1840's and 1850's, including major examples of Italianate and Gothic style villas on substantial lots, as well as some of the city's finest examples of the Second Empire style of the 1860's and 1870s (figs 23, 34 & 39). Interspersed between these large and ostentatious mid-nineteenth century residences are earlier Federal and Greek Revival style residences. Several important churches built for prosperous congregations are located in this neighborhood as well, especially at the south end where Grand Street makes the transition from a residential street to the city's civic and institutional center. Churches in this section of the district include the 1858

**United States Department of the Interior  
National Park Service**

For NPS use only  
received  
date entered

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh,

Continuation sheet Orange Co., New York Item number m 7

Page 5

Gothic style First Presbyterian Church by Fredrick Withers, at 207-215 Grand Street (fig.31), the 1861 Gothic style Trinity Methodist-Episcopal Church, at Liberty and Third, the uncompleted Gothic style church at 259 Grand Street (fig.34), also designed by Withers for St. Paul's Episcopal Church and begun in 1865, a small Gothic style church built in 1876 for the Reformed Episcopal Church, located at 113 South Street, the 1855 Westminster Reformed Presbyterian Church at 169 Grand Street, extensively remodelled with Romanesque and Second Empire style details in 1872 (fig. 33) and the Temple Beth Jacob at 119 South Street, designed in a modified Romanesque style and dedicated in 1891 (fig.35). The streets within this neighborhood are lined on both sides with large shade trees and many of the larger residences incorporate extensive landscape development, reflecting A.J. Downing's and Calvert Vaux's influence here in the nineteenth century.

Representative examples of the residential architecture of this neighborhood include the Federal style frame residence at 160 Grand Street with its two-story, five-bay, center entrance facade and pedimented dormers, built c. 1835; 131-133 Montgomery Street, a gambrel roofed structure which once housed a Masonic Lodge in the attic story (fig.21); and the David Crawford House at 189 Montgomery Street, built in 1829 and featuring a columned giant portico, a pediment with a Palladian window and an extravagantly detailed center entrance with leaded sidelights and transom. Intact Greek Revival style townhouses occur in several locations in this neighborhood and are best represented by a frame row at 112-120 First Street, designed by Thornton M. Niven in 1837 and referred to as "Quality Row" at least as early as the 1890's (fig.6). Each of these two-story residences is three bays in width with a side entrance and stoop and is built above a raised masonry basement. The board attic frieze, short frieze windows, broad gable roof and tall chimneys are characteristic of the Greek Revival style in Newburgh. An unaltered brick townhouse featuring these same characteristics is located at 282 Grand Street, built c. 1840, and several other examples, some of which have been altered with the application of mid-to-late nineteenth century trim, can be seen elsewhere in the neighborhood.

The picturesque era, distinguished by the direct influence of nationally prominent Newburgh architects Downing, Vaux and Withers, is especially well represented in this neighborhood. Noteworthy examples include "Tuscan Villa" the residence of General William C. Hasbrouck, at 99 Montgomery Street built in the early Tuscan-Italianate style in 1838, and Gothic-influenced residences on Grand and Montgomery streets, many featuring designs published in Vaux's 1857 Villages and Cottages. Two of the best examples representing picturesque Gothic designs are 196 Montgomery Street (fig.23), built in 1857, featuring a cross-gabled, bargeboard-detailed roof, hooded windows and cast-iron cresting, and 180 Grand Street (fig. 28), built c. 1855 and



**United States Department of the Interior  
National Park Service**

For NPS use only  
received  
date entered

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh,  
Continuation sheet Orange Co., New York

Item number 7

Page 6

featuring a hipped, polychromed of slate roof and a gabled entrance projection with Gothic-arched openings and pierced bargeboards. Other of the many excellent examples occur at 208 and 216 Montgomery Street (fig. 24 & 25 ) and 264 and 288 Grand Street (fig. 29 )

The Second Empire style is also well represented in the Montgomery Grand and Liberty Streets are with especially fine examples at 222, 226, 230 Montgomery Street (fig. 26), and 275 Grand Street, each featuring the characteristic hooded windows and mansard roofs with dormers. Common during the 1860's and 1870's, this style was popular both for large detached residences with landscaped grounds, and for attached rowhouses, as illustrated by the row of townhouses at 261-265 Grand Street (fig. 34 ).

Chronologically, the remainder of the housing in this neighborhood consists primarily of later nineteenth century brick townhouses, often featuring rounded or three-sided bay windows and Italianate or Romanesque style details and typically three stories in height. Typical examples of this building type include 234 Grand Street built c. 1885 (fig. 30 ), 109 Montgomery Street, built c. 1890 (fig. 21 ), and 253-255 Montgomery Street built c. 1880. With the notable exception of the Post Office, the Hotel Washington, and the original Telephone Company Building, all contributing elements in the historic district, very little twentieth-century development occurred in this neighborhood prior to the construction of the sensitively designed Telephone Company addition (fig. 153), and the non-contributing Montgomery Street School in 1961 at 133-159 Montgomery Street (fig. 157).

A second and chronologically less diverse neighborhood, generally defined as including Chambers Street, Lander Street and Johnson Street between Broadway and South Street, is located west of the Montgomery Grand and Liberty Street neighborhood. It is primarily characterized by two-and three-story brick townhouses of the mid-nineteenth century featuring excellent individual examples or rows of Greek Revival, Italianate, modified Gothic and Second Empire style residences.

The earliest buildings in this neighborhood are two-and-one half story, three-bay brick townhouses in the Greek Revival style, featuring side bay entrances, raised foundations, rectangular window and door openings, broad friezes with windows and broad gabled roofs with tall chimneys. Similar to Greek Revival style townhouses of the late 1830's and early 1840's found elsewhere in the state, these buildings are best exemplified in this neighborhood by 167 Chambers Street and 173-175 Landers Street (fig. 49), both built c. 1840. A slightly later and highly distinctive variation of this basic type is similar in form and massing, but features segmentally arched window openings and, in some cases, panelled brick facades defined by blind arcading detailed with saw toothed, segmental arches. This building type, prevalent in this area between 1850 and 1860, seems to combine

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh, Orange

Continuation sheet Co., New York

Item number 7

Page 7

For NPS use only
received
date entered

Greek Revival and Italianate style features and appears to be unique to Newburgh. Examples are evident at 51-55 Chambers Street (fig.40) and 49-83 Lander Street (fig.45). Another townhouse type rarely seen outside of Newburgh is the two-story brick house with three bays at the first story, two or three at the second and a steeply pitched gabled dormer with Gothic Revival style vergeboards. This townhouse type appears to date from the 1850-1860 period and includes representative rows at 191-197 Chambers Street (fig.43), 85-87 and 130-148 Lander Street, and 146-164 South Street (fig.57).

The Chambers, Lander-Johnson Street neighborhood also includes townhouses illustrating the Italianate and Second Empire styles. Buildings at 13-19 Johnson Street and 162-182 Lander Street (fig.48) are typical of the Italianate style rowhouses, featuring flat three-bay facades, segmental arched openings and bracketed cornices, dating from the 1860's and 1870's. The Second Empire style is also represented in the neighborhood, as seen in the c. 1870 mansard-roofed townhouses at 71-75 Chambers Street (fig.41) and 196-204 Lander Street (fig.50), as well as in a large, detached residence at 39 Johnson Street built c. 1870 (fig.51).

Later infill housing in this neighborhood consists primarily of two- and three-story brick townhouses with three-sided bay windows and an adjacent entrance bay. Typically including wide, overhanging cornices and, in some examples, entrance porches, this Newburgh building type was often associated with Frank Estabrook, a Newburgh designer during the 1880's and 1890's, and is more prevalent in the Washington Heights area, as well as in the residential streets north of DuBois. Numbers 6-16 Farrington Street (fig.58) and 163-169 Johnson Street (fig.54) are among the most representative examples of this townhouse type in this part of the historic district. Except for scattered demolitions, almost no later development has occurred in this mid-nineteenth century enclave. Turn-of-the-century houses appear only occasionally on streets in the fringe area of Liberty Street.

A third neighborhood north of Broadway, located west of Johnson Street, centered along DuBois Street and also including South Miller Street, North Miller Street, City Terrace, Lutheran Street and portions of Van Ness, First and Third Streets, reflects the continuing westward expansion of the city in the late nineteenth century. The neighborhood is predominantly characterized by two- and three-story brick rowhouses built between 1865 and 1900. Saint Luke's Hospital complex is located at the center of the neighborhood on DuBois Street and, with two exceptions, discussed below, consists primarily of large (up to eight stories in height) institutional twentieth-century buildings which do not contribute to the historic district (fig.124). Downing Park is located in the northeast section of the

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh, Orange  
Continuation sheet Co., New York

Item number 7

Page 8

For NPS use only  
received  
date entered

neighborhood and represents an important contributing element of the historic district.

The earliest residences in this neighborhood are concentrated in its southeast corner and typically consist of the range of high quality Federal, Greek Revival, Picturesque and Second Empire style architecture found in the more eastern part of the city (fig.63). More simple two- and three-story brick Italianate style residences, of the same period with three-bay facades and bracketed cornices (fig.67) are located on peripheral streets: 25 South Miller Street and a row of connected residences at 44-52 South Miller Street (fig.68). Development in this area during the 1880s is illustrated by several modified Queen Anne style rowhouses, the best examples of which are the distinctive turreted houses at 41-45 DuBois Street, built c. 1885 (fig.64). These three connected houses feature a continuous verandah with finely detailed, spindled frieze and balustrade. Somewhat similar and also featuring a turreted tower is 42 DuBois Street, built c. 1885.

In the northern and western portions of this neighborhood, the predominant residential building type is the two- or three-story brick rowhouse with a projecting three-sided or curved window bay, an adjacent entrance bay, often with a projecting wooden porch, and a bracketed cornice. Built between 1885 and 1900, strong concentrations of this house type are evident on Lutheran Street, City Terrace and Third Street with excellent representative examples occurring at 48 Lutheran Street (fig.71), 87 City Terrace, and 197 DuBois Street. Frank Estabrook developed a distinctive variation of this house type, seen elsewhere in the historic district, that is distinguished by the addition of a projecting masonry entrance porch featuring a massive round stone arch supported by slender, freestanding colonnettes. Examples of this variation are present at 253 and 259 Third Street both built c. 1890 (fig.77).

Several institutional buildings in the DuBois Street neighborhood merit separate attention. The earliest of these is the 1837 south wing of Saint Luke's Hospital at 72-102 DuBois Street, built as a seminary building for the Associated Reformed Synod of New York (fig.124). Designed by Newburgh architect Thornton M. Niven, this four-story grey stone building with contrasting red sandstone trim features quoined corners and Gothic-arched entrances. It is one of the largest stone buildings in the historic district. A second contributing building on the Saint Luke's hospital campus is the Nurse's Residence, built c. 1910 in the Georgian Revival style (fig.72). This three-story brick structure, located at 184-186 First Street, is except well detailed and represents one of the finest examples of the Georgian Revival style in the historic district.

**United States Department of the Interior  
National Park Service**

For NPS use only  
received \_\_\_\_\_  
date entered \_\_\_\_\_

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh, Orange Co.,

Continuation sheet New York

Item number 7

Page 9

Downing Park, begun in 1887 and designed by the nationally prominent landscape architects Frederick Law Olmsted and Calvert Vaux as a memorial to A.J. Downing, occupies a large, hillside tract of land at the western edge of the historic district between Robinson Avenue and DuBois Street and between Third Street and South Street in the northeastern corner of the DuBois Street neighborhood (figs. 78-84). The park incorporates many of the landscape design features associated with the work of Olmsted and Vaux in the late nineteenth century, including a lake, fountain, small pond, pathways conforming to the contours of the site, a rustic wooden pedestrian bridge, clumps of carefully selected shrubbery and trees, open spaces and playing field arranged on the site to create vistas, and an observation area with a pergola, designed to take advantage of dramatic views of the city and the Hudson Highlands.

A fourth neighborhood north of Broadway consists primarily of early twentieth century residential development at the northern ends of Liberty Street and Grand Street, between Broad Street and LeRoy Place. This area of the historic district has a distinctive suburban character, explained by the relatively large residential lots on the uphill (west) sides of Liberty Street, Grand Street and Le Roy Place, and the rows of large shade trees which line the streets in this area. Houses in this neighborhood range from relatively small early twentieth century pattern book houses, often with square-shaped plans, hipped roofs and large front porches (typified by the frame residence at 480 Liberty Street, built c. 1915) to sprawling turn-of-the-century houses with Queen Anne and/or Shingle style designs, such as 335 and 420 Grand Street (figs. 92 & 96) and 506 Liberty Street. Historical eclecticism is evident in the numerous examples of the Colonial Revival style found in this neighborhood many of which feature gambrel roofs suggestive of the Dutch tradition in the Hudson Valley, as seen at 350 Grand Street (fig. 94), built c. 1920 and 362 Grand Street, built c. 1920. There is one example of a c. 1920 pattern book Mission style residence, featuring a stucco exterior, arched windows and a flat roof, at 432 Liberty Street (fig. 86), and several house designs with Arts and Crafts details, especially 450 Liberty Street, built c. 1920 (fig. 87).

Interspersed within this neighborhood are several earlier structures. An exceptionally fine Federal style residence with a two-story five-bay center entrance facade built c. 1810 is located at 388 Grand Street (fig. 95), and two modest and partially altered mid-nineteenth century rowhouses, one with Greek Revival details, survive at 83 and 85 Nicoll Street. Two brick carriage barns remaining from mid-nineteenth century estates subdivided during the late nineteenth and early twentieth centuries are located at 402 and 406 Liberty Street. A portion of Mount Saint Mary's college campus, including an important mid-nineteenth century Gothic villa dependencies and grounds, is also incorporated within the historic district on the west side of Liberty Street at Broad Street (fig. 85). Several small brick rowhouses with Victorian period porches, bay windows and bracketed cornices occur on Liberty Street; a fine example of this type is found at 508 Liberty, built c. 1890.

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh, Orange Co.,

Continuation sheet New York

Item number 7

Page 10

For NPS use only

received

date entered

South of Broadway, the historic district includes a diverse range of commercial, residential, and industrial neighborhoods, as well as the Washington's Headquarters National Historic Landmark (now a New York State Historic Site), within a large, park-like site, and an early nineteenth century picturesque cemetery. The earliest development within the south half of the district occurs near its center, in the vicinity of Parmenter Street and between Liberty Street and Colden Street. Late nineteenth and early twentieth century development is especially concentrated in the Washington Heights neighborhood, south of Renwick Street. A late nineteenth century neighborhood commercial area survives on either side of William Street between South William and Renwick Streets, and the remnants of a major manufacturing district are present at the eastern edge of the historic district, in the vicinity of Edwards Street and Johnes Street.

The Washington's Headquarters State Historic Site (National Historic Landmark) is located east of Liberty Street between Lafayette Street, Washington Street and Colden Street on a bluff overlooking the Hudson River and the mountains to the east (fig. 99). Within its park-like site are three historic buildings and two monuments which contribute to the historic district including the 1750 Jonathan Hasbrouck House, built of stone and reflecting a combination of French Huguenot and Dutch vernacular traditions, the grave site and monument of Uzal Knapp, the last surviving member of Washington's select Life Guard Corps, (interred 1856, stone monument erected 1859), the massive, stone, Richardsonian Romanesque Tower of Victory, built between 1883 and 1887 and designed by John A. Duncan, the distinguished 1910 Georgian Revival style museum building, designed by Franklin B. Ware in brick with limestone trim, and the 1924 bronze minuteman statue by Henry Kitson. (A 1940 stone barn on the property, designed to complement the historic site by Historic Williamsburg and built with Works Progress Administration funds, is a non-contributing element of the historic district due only to age.) The Victorian-period wrought-iron "centennial" fence surrounding the site represents a contributing structure on this property.

A well-preserved residential enclave from the second half of the nineteenth century is located on Grand Street and Washington Street, east of Washington's Headquarters between Washington Street and Broadway. Included in this area are four c. 1870 Second Empire style rowhouses, two c. 1870 detached Second Empire style houses, seven c. 1870 Italianate style rowhouses and three late nineteenth century rowhouses with curved or three-sided window bays and projecting bracketed cornices, built between 1885 and 1895 (fig. 100). Also in proximity to Washington's Headquarters are the intact row-houses and store buildings on Liberty Street, between Renwick Street and Broadway (figs. 101-102). The majority of these are three- and four-story brick buildings with Italianate style features of the 1870's and 1880 including segmentally arched windows, bracketed cornices and flat roofs, and, in many

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh,

Continuation sheet Orange Co., New York Item number 7

Page 11

For NPS use only

received

date entered

cases, three-bay facades with storefronts as illustrated by 4 Liberty Street, built c. 1870 (fig.103). Several earlier rowhouses with commercial first floors are located directly west of Washington's Headquarters on Liberty Street, as illustrated by 85 Liberty Street, built c. 1845, which features rectangular windows with stone lintels and a gable roof (fig.101).

The only residential neighborhood which still reflects the "village" character of late eighteenth and early nineteenth century Newburgh is centered on either side of Parmenter Street one block west of Washington's Headquarters extending one block north and south of Parmenter to include portions of Washington Street and Spring Street on lands originally owned by Jonathan Hasbrouck (figs.108;106,109). Saint George's Cemetery, developed in the first half of the nineteenth century by one of Newburgh's oldest congregations, is adjacent to and historically related to this early residential enclave (fig.110). Although this neighborhood suffers from numerous cosmetic alterations to its early nineteenth century residences and generally poor maintenance, its gabled two-story, Federal style frame houses contribute to distinctive and unique early nineteenth century streetscapes no longer evident elsewhere in Newburgh. Two house types are particularly characteristic of this neighborhood: the frame two-story, three-bay, side entrance rowhouse with a gable roof and a single gable end chimney, and the frame, two-story, five-bay, center entrance house with a gable roof and two end chimneys. These houses range in date from about 1800 to 1835 and include 110 Washington Street, a representative of the three-bay house type, built c. 1820, and 26 Parmenter Street, a representative example of the five-bay center entrance house type, built c. 1810 (fig.108). Several gabled Greek Revival style rowhouses are present in this neighborhood as well, including examples on Ann Street east of Liberty Street, built c. 1835, which feature brick two-story, three-bay, side entrance facades (fig.107), and commercial/residential buildings on Liberty Street. A small, brick Gothic Revival style church building c. 1870 with intact details remains at 111 Washington Street (fig.105). Infill housing at the fringes of this neighborhood includes good examples of three-story brick Italianate style rowhouses of the 1890's with curved or three-sided window bays. (figs.106 and 109).

Saint George's Cemetery occupies a large, hilly tract of land west of the Spring-Parmenter-Washington Street neighborhood and is framed by William and Clark streets at the west, Washington Street at the north (entrance) side, Federal, Amity and Lander Streets at the east, and South William Street at the south. Well developed by 1870, this cemetery's distinctive features include a mid-nineteenth century iron perimeter fence, curvilinear roads suggestive of post-1840 rural cemeteries and a large number of mid-nineteenth century tombstones and obelisks (figs.110 and 111).

United States Department of the Interior  
National Park Service

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh,

Continuation sheet Orange Co., New York Item number 7

Page 12

For NPS use only

received

date entered

A small industrial precinct is located within the East End Historic District immediately south of Washington's Headquarters on Johnes Street, Edwards Street, and Colden Street between Lafayette Street and Renwick Street. This six-block area is all that remains of a much larger late nineteenth century manufacturing district comprised of a dense concentration of two-to-four-story brick industrial plants extending eastward to the river, most of which have been destroyed by fire or urban renewal. Several historically important plants remain in this limited area, including the two-and three-story Whitehill Engine and Pictet Ice Machine Company complex at 44-62 Johnes Street built between 1883 and 1890 (fig.112), the three-story Newburgh Steam Boiler Works at 1-13 Colden Street, built c. 1890 (fig.113), the two-and three-story Newburgh Paper Box Company at 80-88 Colden Street, built c. 1880 (fig.114), and a two-story industrial plant at 2-8 Johnes Street, built c. 1878 (fig.115). Interspersed among these industrial buildings are several late nineteenth century brick rowhouses, particularly along Edwards Street where Italianate style and late Victorian period rowhouses with three-sided window bays are present.

Another south-end neighborhood with a separate small-scale commercial/residential identity occurs at the western edge of the historic district along the east and west sides of William Street between Broadway and Carson Avenue. This elongated neighborhood is about eight blocks in length and consists of a mix of two-and three-story brick rowhouses and store buildings from the 1880's through 1910, lining both sides of brick-paved William Street. The most prevalent building type in this neighborhood is the two-or three-story brick rowhouse, the majority of which feature first story storefronts and Italianate style segmental arch windows and bracketed cornices, as exemplified by No. 61 William Street, built c. 1880 (fig.116). Later examples of this basic building type include steeped, arched and pedimented parapets characteristic of the early twentieth century that reflect the influence of the Mission style. An intact example of this slightly later store building with an upper story flat is evident at 84 William Street, built c. 1910. Also present on William Street is an unusually distinctive row of four detached two-story brick townhouses at 96, 98, 100, and 102 William Street, featuring Queen Anne style details, including brick balustrades, terra-cotta spandrel panels, gable roofs, and shed roofed dormers (fig.118).

The southernmost area of the East End Historic District includes a 31 block area generally contained within Benkard Avenue at the north, Bayview Terrace at the east and south and Monument Street and Avoca Street, at the west. South of Renwick, this area is commonly referred to as Washington Heights. Rapidly subdivided and developed between 1886 and 1900, this

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

For NPS use only

received

date entered

East End Historic District, Newburgh,  
Continuation sheet Orange Co., New York

Item number 7

Page 13

middle-class residential area is characterized by unbroken rows of attached and semi-detached two-and three-story brick rowhouses with three-sided or curved window bays, adjacent flat entrance bays with or without projecting wooden porches, and projecting, bracketed wooden cornices, built here between 1886 and about 1895. In most instances, this rowhouse type occurs on the east-west streets of Benkard, Renwick, Carson, Overlook, Courtney and Henry. Detached frame houses with Queen Anne style verandahs, turreted towers, and complex rooflines from the same period are well represented in the Washington Heights neighborhood, occurring most frequently on South Liberty Street and Bayview Terrace, often on lots with desirable Hudson River views. On Beacon Street, Courtney Street, and Carson Avenue, there are a number of modest detached two-story frame residences, built c. 1895, with gables oriented to the street and detailed with modest late Victorian period trim. Contributing early twentieth century infill housing, often illustrating variations of the bungalow mode and other popular pattern book designs, occurs sporadically in the southwestern quarter of Washington Heights, especially in the vicinity of Bayview Terrace, Monument Street and Henry Street.

Representative examples of the c. 1890 brick rowhouses characteristic of this area include the three-story brick rowhouse at 55 Benkard Avenue, with segmentally arched windows, three-sided window bay, and a wooden entrance porch with spindlework frieze and balustrade (fig.121), and the two-story brick rowhouse at 53 Courtney Street, which features a rounded window bay, rectangular windows with simple stone lintels, and a similar projecting wooden entrance porch with turned posts, scroll sawn brackets, and spindlework frieze and balustrade (fig.134). Variations on these basic house types include duplexes composed of connected pairs as seen at 59-61 Courtney Avenue (fig.134), and houses of similar form built of different materials, exemplified by the wooden pair at 91-93 Overlook Place and the rusticated concrete block house at 67 Courtney Avenue.

Representative examples of the large turreted Queen Anne style frame houses of the 1890's period found throughout Washington Heights include 14 Overlook Place with both a square shaped tower with pyramidal roof and a round-shaped tower with a shallow dome, 63 South Liberty Street, with its round tower and bulbous onion dome (fig.131), and 64 South Liberty Street, with round-shaped tower, arched third story sleeping porch, and a broad, L-shaped verandah (fig.136). More modest, two-story frame residences with gabled facades built during this period on Beacon Street, Courtney Street and Carson Avenue are perhaps best represented by the row of six such houses at 57-67 Carson Avenue, each featuring a three-bay facade and a projecting front porch with decorative frieze.



**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh,  
Orange Co., New York

Continuation sheet

Item number

7

Page

14

For NPS use only

received

date entered

Early twentieth century housing in Washington Heights occurs primarily as infill housing and illustrates modest suburban house types common throughout the Northeast. Many of the frequently seen designs, such as the square-shaped two-story, hipped-roof house at 85 Henry Street, resemble designs published in popular pattern books of the second and third decades of the century.

In addition to housing, the south end of the historic district includes several prominent churches and schools. Most notable of these is the monumental, brick Romanesque style Saint Francis church and priory at the corner of Benkard and Avoca, built c. 1910 (fig.141), and the smaller, frame Queen Anne style church at 46 South Liberty Street, with its bell-cast shaped tower roof, built for the First Congregational Church c. 1891 (fig.135). One of the city's finest school buildings is located in this neighborhood as well, near its northern fringe at 1-5 Liberty Street (fig.123). The two and one-half story building was built of brick and stone in c. 1891. Designed by Frank Estabrook, it is an exceptional example of Richardsonian Romanesque style architecture.

List of Buildings

East of the properties included in the East End Historic District is recorded in the annotated and alphabetized building list which follows.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Amity Street</u>		
	1 - 5	c. 1905	One-story garage; rock faced cinder block; flat roof; seven bays; original and modern glazed and panelled doors; nc-g
	6 - 8	c. 1903	One-story garage; single bay; tarpaper siding; flat roof; left side has a lean-to addition; good condition. nc-g
	<u>Ann Street</u>		
	75	c. 1850	Two-story residence with raised basement; three bays; gabled roof and dormer; tarpaper siding; plain cornice and architrave; 1/1 windows; porch has turned columns, balusters, spindles, and brackets; good condition.
	77	c. 1850	Three-story residence; four bays; raised basement; bracketed cornice; flat roof; tarpaper siding; 1/1 windows with heavy over-windows; multi-light transom; overdoor with plain pilasters; glazed and panelled door; good condition.
	79	c. 1850	Two-story residence; three bays; raised basement; gabled roof; bracketed cornice and panelled frieze; 1/1 windows; asbestos siding; portico with bracketed cornice and panelled frieze; new wrought iron columns and railing; good condition.
	81	c. 1850	Two-story residence; three bays; raised basement; gabled roof; bracketed cornice; panelled frieze; 1/1 windows; asbestos siding; portico has turned spindles, new cast iron columns and railing with gabled roof; good condition.
	83	c. 1850	Two and one-half-story residence; three bays; raised basement; gabled roof; aluminum siding; 1/1 windows; portico has flat roof with bracketed cornice; single glazed and panelled door with transom; good condition.
	85	c. 1845	Two-story residence; four bays; raised basement; gabled roof; asbestos siding; 1/1 windows; inner and outer glazed and panelled doors; modern porch; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Ann Street</u>		
87		c. 1875	Three-story, brick commercial/residential structure; three bays; flat roof; bracketed cornice and panelled frieze; one urn atop; 2/2 sash; arched brick lintels and stone sills; storefront cornice has brackets; recessed entrance is flanked by cast iron columns; good condition.
89		c. 1930	One-story brick; commercial; three bays; parapet cornice; non-contributing.
91		c. 1860	Three-story residential brick on raised basement; three bays; stone flat arched windows; bracketed wooden cornice; altered entrance; fair condition.
93		c. 1860	Two-and-one-half-story brick residence, three bays, sandstone, flat arched windows, box cornice, fair condition.
95-97		c. 1950	One-story brick and block commercial; non-contributing.
143		c. 1950	Masonry service garage; non-contributing.
145		c. 1845	Two-and-one-half-story brick residence; three bays; cast iron window and door lintels (decorated); poor condition.
147		c. 1845	Two-and-one-half-story brick residence with converted store front; fire damaged.
151		c. 1880	Three-story brick, five bay, commercial/residential; altered first floor; flat arched windows; stone lintels; 1/1 sash; wooden bracketed cornice; fair condition.
153		c. 1870	Three-story brick, three bay, residence; corbeled segmentally arched windows; no sash; no cornice;
155		c. 1870	Three-story brick residence, four bays; carriage way at first level; corbeled segmentally arched windows; wood bracketed cornice, poor condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	Ann St., continued 157	c. 1880	Three-story brick residence, two bays with three-sided bay; raised basement; flat-arched windows; 1/1 sash; wood bracketed cornice; fair condition.
165		c. 1850	Three-story brick residence; three bays; three-sided bays; flat arched windows; stone trim; 2/2 sash; fair condition.
167		c. 1860	Three-story brick residence; raised basement; three bays; flat arched windows; stone trim; 2/2 sash; full width columned porch; aluminum cornice; poor condition.
169-171		c. 1840	One-and-one-half-story frame residence; raised basement; three bays; wooden pilasters; asbestos siding; porch missing; no sash; windows boarded; dentil cornice; poor condition.
82		c. 1850	Two-story residence; three bays; raised basement; flat roof; bracketed cornice; tarpaper shingles; 2/2 sash; panelled door with sidelights; canopy has mansard roof; bargeboard pendants; good condition.
160		c. 1850	Three-story brick residence; raised basement; three bays; corbeled segmentally arched windows; 6/6 sash; boxed cornice; fair condition.
176-178		c. 1930	One-story decorative block garages. Non-contributing.
180		c. 1875	Three-story brick residence; two bays; three-sided bays; sculptured flat arched windows; wooden bracketed cornice; good condition.
	Avoca Street 39	c. 1880	Two-story, three-bay brick residence; segmentally arched windows with brick keys; 2/2 sash; wooden bracketed cornice; replacement porch.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Bayview Terrace</u>		
2		c. 1890	Two-and-one-half-story clapboard residence; four bays; mansard roof with patterned slate; projecting bays have gabled and pyramidal roofs; double door entrance; 1/1 sash; encircling porch with spindles, turned columns; fair condition.
2	Rear (on Overlook)	c. 1890	Carriage house; clapboard; gable roof with cross gable; garage addition to its facade; retains two of its original glazed/panelled garage doors; fair condition.
4-6		c. 1890	Two-and-one-half-story brick double house; five bays; slate roof; two double door entrances; two round towers with conical roofs; round-arched windows in cross gable; 1/1 sash; original encircling porch on north section; early twentieth century stone porch; second story window made smaller; good condition.
8		c. 1890	Two-and-one-half-story residence with aluminum siding; four bays; slate roof; cross gables; 1/1 sash; entrance altered; two-story porch; good condition.
9		c. 1890	Two-and-one-half-story residence with asbestos siding on top two stories; brick on first; four bays; 1/1 sash; tower with conical roof and one half-round window; elaborate Queen Anne porch; bracketed cornices on porch and on towers; tripartite window on third floor with decorative woodwork; fair condition.
9	Rear (on Courtney)	c. 1900	Two-bay garage; cinder block; old panelled garage doors; glass removed; non-contributing

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Bayview Terrace</u> 10	c. 1890	Two-and-one-half-story residence with tar-paper siding; three bays; irregular roofline; 1/1 windows; altered porch; original double glazed and panelled doors; square tower with pyramidal roof with pinnacle; good condition.
	10 Rear (on Courtney)	c. 1890	Three-bay garage; clapboarded; hipped roof; glazed and panelled garage doors; non-contributing.
	12	c. 1890	Two-and-one-half-story residence with hipped roof; three bays; first story is stone, second story is brick; 1/1 windows; entrance with stained glass transom; five-sided central gable; round second story bay atop porch; encircling porch with classical columns, good condition.
	14 - 15	c. 1890	Two-and-one-half-story double residence with gabled roof; four bays; 1/1 windows; right side has square projection with cross gable; left side has rounded projection with rounded gable; porch with panelled gable and denticulated cornice; exterior chimneys with decorative brickwork; good condition.
	16	c. 1890	Two-and-one-half-story residence; three bays; first story is clapboard; second story shingled; cross gables; 2/2, 4/4, 1/1 sash; porch with turned columns, spindles and early twentieth-century glazed enclosure; shingled bay in facade gable end; two-story bay on south elevation with brackets and sunburst panelling; good condition.
	18	c. 1890	Two-and-one-half-story residence with aluminum siding; three bays; gabled roof with cross gables and dormers, 1/1 windows, altered; entrance with panelled door, sidelights on one side and architrave trim on door surround, altered porch; excellent condition.
	20	c. 1890	Two-and-one-half-story residence; trapaper and asbestos siding; four bays; gabled roof with cross gables and dormer; latter is jerkin-headed with decorative woodwork; 1/1 windows; recessed window behind elaborate wood arch with pediment; facade windows have elaborate wood lintels with surround; porch altered; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Bayview Terrace</u> 22	c. 1890	Two-and-one-half-story residence with aluminum siding; three bays; gabled roof; 1/1 windows, altered; singled door entrance; encircling porch with Tuscan columns atop aluminum-sided base; two-story three-sided bay on facade and on south elevation; good condition.
	22 Rear	c. 1905	One-story, two-bay garage; stuccoed over cementblock; parapet in three steps; original wooden doors; non-contributing.
	23		One-story, two-bay garage of wood; hipped roof; original doors; non-contributing
	25	c. 1890	Two-story, brick residence; three bays; low-pitched roof; bracketed cornice; three-sided bay on second story; early twentieth-century, two-story porch; 1/1 windows; entrance with transom and sidelights; good condition.
	26 - 27	c. 1890	Two-story, double house of brick; bracketed cornice; low-pitched roof; four bays; 1/1 windows; rounded bays at each end; porches with square and round columns on brick and shingled piers; good condition.
	28	c. 1890	Two-and-one-half-story brick residence with mansard roof; two bays; 1/1 windows; masonry with whiter brick around windows and doors; porch with shingled gable, dentil molding, cornice, grouped classical columns with fluted bottom halves atop piers that have been shingled; bannisters replaced by aluminum siding; good condition.
	29 - 30	c. 1890	Two-story, brick double residence; flat roof; bracketed, panelled cornice; 1/1 windows with either stone or brick lintels; six bays; double entrance doors. # 30 has original picture window with stained glass; square projecting bays on either side; porches altered; one on # 30 retains Tuscan columns; good condition.
	32	c. 1905	Two-and-one-half-story clapboarded residence with hipped roof; two bays; 1/1 windows; porch has shingled gable, dentil molding, plain cornice, Tuscan columns, turned balusters; shingled, hipped dormer with double louvered windows; gabled bay with shingled gable; good condition.

## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

PHOTO#	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Bayview Terrace</u> 33 - 34	c. 1890	Three-story brick, double house; four bays; flat roof; dentil molding and bracketed cornice; panelled doors with round glass in upper half; 1/1 windows with masonry lintels; three-sided bays on each side; decorative brickwork on third story; front porch has turned spindles, balusters; columns with cutwork brackets; good condition.
37		c. 1905	Two-and-one-half-story residence with original siding; gabled roof with cross gables; main front gable has Palladian window; three bays; porch enclosed; good condition.
37 Rear		c. 1905	Three-bay garage with novelty siding; hipped slate roof; panelled garage doors; contributing.
37½ Rear (on South Liberty)		c. 1905	Two-bay garage, clapboarded; pyramidal roof with ventilator; braced batten doors; good condition; contributing.
39		c. 1905	Two-and-one-half-story residence with asbestos siding; four bays; 1/1 windows; double glazed panelled doors with single glass-panelled door inside vestibule; large central hipped dormer; porch with wide plain frieze; Tuscan columns and plain balusters; one-story bay on west elevation; good condition.
42 - 43		c. 1890	Two-and-one-half-story, brick residence; three bays; stuccoed on sides; raised basement; mansard roof; three dormers with double windows; bracketed cornice with decorative woodwork on cornice and frieze; 1/1 windows; facade has two two-story bays; large modern enclosure; fair condition.
44 - 45		c. 1890	Two-story, brick double house with aluminum siding; flat roof; raised basement; four bays; bracketed cornice, enclosed porches on second story; three-sided bay on first story; right first story porch retains three Tuscan columns and has landing to the side; good condition.
46		c. 1890	Two-story brick residence with two bays; flat roof; raised basement; 1/1 windows; entrance has transom and sidelights; two-story rounded bay on left side; stone lintels, sills and water table; porch is aluminum-sided and stuccoed; good condition.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Bayview Terrace</u>		
48		c. 1905	Two-story residence with vinyl siding; two bays; flat roof; three-sided, two-story bay; two-tier porch; 1/1 windows; altered entrance; good condition.
50		c. 1905	Two-and-one-half-story residence; three bays; gabled roof; aluminum-sided; two entrances; windows on first story; facade has small panes in upper sash; two-tier porch enclosed on second story; altered entrance; good condition.
52		c. 1905	Two-and-one-half-story residence with asbestos siding; three bays; gabled roof; two entrances; 1/1 windows; windows have small panes in upper sash; two-tier porch enclosed on second story; fair condition.
56		c. 1905	Two-story residence with asbestos siding; three bays; low-pitched gable roof; two-tiered porch; two entrances; wide window on first and on second story; plain cornices; good condition.
60		c. 1905	Three-story, brick residence; two bays; gabled roof; 1/1 windows with stone lintels and sills; double glazed/panelled doors; encircling porch with classical columns atop aluminum-sided base; three-sided bay on first two stories and porch with pyramidal roof on third; fair condition.
62		c. 1905	Three-story, brick residence with two bays; flat roof; bracketed cornice; panelled frieze; long narrow windows with stone lintels and sills; patterned brickwork between third and second stories; double glazed and panelled doors; altered porch; good condition.
62 Rear		c. 1920	Two-bay garage of cinderblock; flat roof; good condition; non-contributing garage.
68		c. 1905	Two-story residence with aluminum siding; two bays; raised basement; low-pitched gable roof; two-tier porch; three-sided bays on first and second stories; double door entrance; round columns on porches; good condition.
68 Rear (on South Lander)		c. 1905	Two-bay garage; tarpaper siding; pyramidal roof; old glazed and panelled garage doors; good condition; contributing garage.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Bayview Terrace</u>		
	72	c. 1890	Two-and-one-half-story, brick residence; three bays; raised basement; mansard roof has patterned slate and flat roofed, panelled dormers; 1/1 windows; porch on east and north elevations has dentil molding, plain cornice and turned balusters; double, glazed and panelled doors; south elevation has two-and-one-half-story gabled bay; porch on west elevation has three tiers, turned columns, turned spindles; northwest and south-east corners are altered, cast iron fence; good condition.
	72 Rear (on South Lander)	c. 1900	Two-bay garage; clapboarded; old glazed and panelled garage doors with braced battens; pyramidal roof; good condition. nc-g
	70	c. 1905	Two-and-one-half-story, clapboarded residence; two bays; pyramidal roof with dormers and gabled bays; 1/1 windows; small second-story porch; first-story porch across facade three-sided bay on first and second stories; entrance appears to be altered; good condition.
	74	c. 1905	Two-and-one-half-story residence with asbestos siding; two bays; gabled roof; 1/1 windows; plain, classical porch; three-sided bay on second story of facade; gabled dormer on east elevation; good condition.
	75	c. 1905	Two-and-one-half-story residence of asbestos siding; four bays; flared gable roof; cross gable over two-and-one-half-story section on facade; small triangular dormer on facade 1/1 windows; porch with Tuscan columns; turned balusters; altered railings; good condition.
	161	c. 1890	Two-story, brick residence; two bays; raised basement; flat roof; bracketed cornice with architrave/frieze; rounded full-height bay at left; narrow 1/1 windows; porch with turned spindles; turned columns and fanlike brackets; good condition.
	<u>Beacon Street</u>		
	45	c. 1890	See 89 R South Liberty Street.
	47	c. 1890	Two-and-one-half-story residence; three bays gabled roof; gables shingled; asbestos siding; 1/1 windows; shingled, square bay atop first story, three-sided bay; porch has Tuscan columns; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Beacon Street</u>		
49		c. 1890	Two-and-one-half-story residence; metal gabled roof; tarpaper siding; windows sealed; wide projecting bay; three-sided bay first story with cutwork brackets at overhang; corner porch with dentil molding, plain cornice, turned columns and balusters; fair condition.
53		c. 1890	Two-story brick residence with flat roof; three bays; bracketed cornice; dentil molding and patterned frieze; 1/1 windows; French windows with arched radiating voussoirs; porch with spool frieze; square columns and balusters; double glazed and panelled doors; good condition.
55		c. 1910	Two-bay clapboarded garage; hipped roof; original glazed and panelled garage doors; non-contributing garage
59		c. 1905	Two-story residence; three bays; flat roof; plain cornice; aluminum siding; new 1/1 windows; three-sided bay on second story; porch retains Tuscan columns; original glazed and panelled inner and outer doors; good condition.
61		c. 1890	Two-and-one-half-story residence; three bays; gabled roof dormer on facade; asbestos siding; bracketed cornice; panelled and denticulated frieze; 1/1 windows; one-story bay with bracketed cornice and panelled frieze; corner porch with Tuscan columns and square balusters; good condition.
63		c. 1905	Two-story residence; three bays; flat roof; bracketed cornice; denticulated and patterned frieze; asbestos siding; 1/1 windows; second story three-sided bay; porch with denticulated frieze; Tuscan columns and square balusters; entrance has leaded sidelights and dentil molding at door surround; good condition.
67		c. 1890	Two-story brick residence; two bays; bracketed cornice; dentil-patterned frieze; two-story three-sided bay; 1/1 windows; porch with turned columns and square balusters; good condition.
69		c. 1890	Two-story; two bay house; gabled roof; asbestos siding; porch completely enclosed; bevelled corner on first story of facade; gabled bay on west elevation; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Beacon Street</u>		
	69 Rear (on South Lander)	c. 1900	Two-bay garage; hipped roof; clapboard; one old glazed and panlled garage door remains; was originally triple garage; non-contributing garage.
81		c. 1890	Two-story brick residence; three bays; flat roof; cornice is aluminum-sided; 1/1 windows; radiating voussoirs and altered porch; entry with transom and glazed and panelled door; good condition.
83		c. 1905	Four-bay garage; gabled roof; clapboarded; original glazed and panelled garage doors; Serves Bayview Terrace houses; nc-g
87 - 89		c. 1905	Six-bay garage; clapboarded; hipped roof; original glazed and panelled garage doors; Serves Bayview Terrace houses; nc-g.
95 - 97		c. 1905	Four-bay garage; clapboarded; hipped roof; original glazed and panelled garage doors; Serves Bayview Terrace houses; nc-g.
44			See 79 R South Liberty Street.
46		c. 1890	Two-story, three-bay residence; asbestos siding; gabled roof with pediment on facade; 2/2 windows; portico altered; good condition.
48		c. 1890	Two-story, two-bay, brick residence; flat roof; plain cornice; 1/1 windows; decorative lintels; altered porch; double entrance; interior glazed and panelled doors remain; good condition.
50		c. 1890	Two-story, two-bay residence; flat roof; bracketed cornice; dentil molding; asbestos siding; 2/2 windows; raised basement of brick and cement blocks; small porch with turned columns; glazed and panelled door; good condition.
52		c. 1890	Two-story, two-bay residence; raised basement with multi-paned windows; flat roof; aluminum-sided, plain cornice; panelled frieze; 2/2 windows; porch with denticulated frieze and fluted columns atop brick piers; fret-work railing; square bay on first story with similar frieze; iron fence; good condition.
60		c. 1905	Two-story, three-bay, brick residence; sides are aluminum-sided; flat roof; bracketed cornice; dentil molding; panelled frieze; second story bay altered; two-tier porch altered; first story retains denticulated frieze; 1/1 windows; entrance with glazed and panelled outer and inner doors; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Beacon</u>		
62		c. 1905	Two-story, three-bay brick residence; flat roof; bracketed cornice; denticulated and panelled frieze; two-tier porch altered; glazed and panelled doors at entry; second story bay altered; sides stuccoed; good condition.
64		c. 1905	Two-story, three-bay brick residence; flat roof; bracketed cornice; denticulated and panelled frieze; two-tier porch is altered; on second story; first story has dentil molding; Tuscan columns and square balusters; second story bay has panelled design; panelled entrance; good condition.
66		c. 1910	Two-story residence; hipped roof with hipped dormers; partially rusticated cement blocks; with pattern along frieze area; two-story, three-sided bay; porch altered with modern cast iron; 1/1 windows; cement block garage in rear; good condition.
70		c. 1890	Two-story, two-bay L-shaped residence; gabled roof; gables have pediments with architrave trim; 1/1 windows; some paired; asbestos siding; two-tier porch altered; glazed and panelled door at entrance; good condition.
70 Rear (on South Lander)		c. 1910	Single-bay garage; clapboard; hipped roof; modern panelled garage door; good condition; nc-g
80		c. 1890	Two-story, two-bay residence with asbestos and aluminum siding; flat roof; plain cornice; two-story, three-sided bay with flared second story; entry has transom; small porch altered; good condition; nc-g
84		c. 1905	One-and-one-half-story, three-bay, shingled bungaloid residence; plain cornice; gabled roof; 6/1 windows; porch with grouped square posts atop shingled railing; exposed rafters; gabled roof; glazed and panelled door; good condition.
86		c. 1905	One-and-one-half-story, three-bay clapboarded residence; gabled roof; shingled gable in facade double windows are 3/1; porch with round columns atop shingled railing; entry has glazed and panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
<u>Beacon</u>			
90		c. 1905	Two-story, two-bay residence; first story has rusticated cement block, second story is shingled; 1/1 windows; double on second story; entry with double glazed and panelled doors; porch with panelled square post atop shingled railing; good condition.
92		c. 1905	Two-story, four-bay residence with vinyl siding; flat roof; plain cornice; three-sided bay on second story; modern 1/1 windows; porch modernized; good condition.
94		c. 1905	Two-story, four-bay residence with aluminum siding; flat roof; bracketed cornice; modern 1/1 windows; porch has round columns; three-sided bay on second story; good condition.
96		c. 1905	Two-story, three-bay residence; aluminum siding; bracketed cornice; three-sided bay on second story; porch has round columns; modern 1/1 windows; good condition.
98		c. 1920	Two-bay garage; cinder blocks; gabled roof; good condition. nc-g
100		c. 1905	Two-and-one-half-story, three-bay residence; aluminum siding; gabled roof; new 1/1 windows; porch retains Tuscan columns; good condition.
<u>Benkard Avenue</u>			
	5	c. 1915	One-story, two-bay brick addition to building fronting South Liberty Street; 1/1 windows; plain door; good condition.
	7	c. 1890	Two-story, five-bay residence of brick; flat roof; bracketed cornice; panelled and denticulated frieze; 2/2 windows; rock-faced stone sills and lintels; glazed and panelled door; porch has cornice, decorative cut-work frieze and brackets; turned columns on solid brick railing; good condition.
	9 - 11	c. 1890	Two-story, four-bay double house of brick; raise basement; flat roof; bracketed cornice, dentil molding; straight rope-type trim on frieze; 2/2 windows; rock-faced stone sills and lintels; two two-story rounded bays; entrances have rock-faced stone lintels; glazed and panelled doors with transoms; rock-faced stone water table; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Benkard Avenue</u>		
	13 - 15	c. 1890	Two-story, four-bay double house of brick; flat roof; bracketed cornice, dentil molding; straight rope-type trim on frieze; two two-story rounded bays; glazed and panelled inner and outer doors; rock-faced stone sills, lintels and water table ; 1/1, 2/2 windows; good condition.
	17 - 19	c. 1890	Two-story, four-bay brick double house; flat roof; bracketed cornice, dentil molding and architrave; 2/2 windows; stone sills and lintels; two two-story, three-sided bays; glazed and panelled inner doors; separate porches: 17-plain cornice, decorative brackets, turned columns and balusters; 19-denticulated frieze, spindles, decorative brackets, chamfered columns, square balusters; good condition.
	21 - 23	c. 1890	Two-story, four-bay brick residence; flat roof; bracketed cornice, denticulated frieze, architrave; 2/2 windows; stone sills and lintels; two three-sided bays; glazed and panelled doors; separate porches are identical with plain cornices, decorative brackets, turned columns and balusters; good condition.
	25 - 27	c. 1890	Three-story, four-bay, brick two-family house; flat roof; bracketed cornice; panelled frieze; two rounded, three-story bays; double, glazed and panelled doors; modern porch; good condition.
	29 - 33	c. 1890	Three-story, four-bay double house with store in corner; brick; flat roof; bracketed cornice; panelled frieze; 1/1 windows; stone sills and lintels; 29 - three-story, full-height rounded bay; 31 - three-sided, two-story bay above store front; latter has cornice, recessed entry with glazed and panelled doors, cast iron columns; main entries have transoms; inner and outer panelled doors and sidelights; good condition.
	31 Rear (on South Lander)	c. 1910	Cinder block garage; false front with parapet; modern, wood, panelled garage doors; good condition. non-contributing
	35 - 37	c. 1890	Two-story, six-bay, brick double house with store-front in corner; bracketed cornice, panelled frieze; 1/1 windows; stone sills and lintels; two three-sided bays on second story; entrances have lintels, transoms, glazed and panelled inner doors; altered store front retains original configuration with recessed entry; 1/1 windows; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Benkard Avenue</u>		
	39 - 41	c. 1890	Two-family, two-story, four-bay, brick residence; flat roof, bracketed cornice; 1/1 windows; stone sills and lintels; two-sided, two-story bays; doubled glazed and panelled doors; stone water table; good condition.
43		c. 1890	Two-story, two-bay, brick residence; flat roof; bracketed cornice; panelled frieze; 1/1 windows, stone sills and lintels; two-story, three-sided bay; double glazed and panelled inner and outer doors with transoms; good condition.
45		c. 1890	Two-story; two-bay, brick residence; flat roof; bracketed cornice, panelled frieze; 1/1 windows; stone sills and lintels; two-story, three-sided bay; double glazed and panelled doors with transom; porch has plain cornice, spindles, slender posts on square piers and square balusters; good condition.
47		c. 1890	Two-story, two-bay, brick residence; flat roof; bracketed cornice; panelled and denticulated frieze; 1/1 windows, stone sills and lintels; two-story, three-sided bay; glazed and panelled inner door; good condition.
49 - 51		c. 1890	Two-story, two-bay, brick residence; flat roof; bracketed cornice, panelled and denticulated frieze; 1/1 windows; rock-faced stone sills and lintels; entry has double, glazed and panelled doors with transom; two-story, rounded bay; porch has dentil molding, turned spindles and columns, decorative brackets; good condition.
53		c. 1890	Two-story, two-bay, brick residence; flat roof; bracketed cornice, dentil molding; panelled frieze; 1/1 windows; rock-faced stone sills and lintels; rounded, two-story bay; double glazed and panelled doors; porch has plain cornice, turned columns, straight balusters; good condition.
55		c. 1890	Three-story, two-bay, brick residence; 1/1 and 2/2 windows; flat roof; bracketed cornice; panelled frieze; stone sills and radiating voussoirs; porch has turned spindles, columns and balusters, decorative brackets; entry has glazed and panelled doors with transom; three-sided, three-story bay; good condition.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Benkard Avenue</u>		
57		c. 1890	Two-story, three-bay, brick residence; flat roof; bracketed cornice; panelled frieze; 1/1 windows with rock-faced stone sills and lintels; square bay with double windows; porch has plain cornice, turned columns and decorative brackets; balusters and railing are new; glazed and panelled door with transom; good condition.
59		c. 1890	Two-story, two-bay, brick residence; flat roof; aluminum-sided cornice; 1/1 windows; stone sills and lintels; two-story, three-sided bay; porch is altered; transom above new inner door; good condition.
61		c. 1905	Four-bay, clapboarded garage; flat roof; old glazed and panelled garage doors; good condition. non-contributing
63		c. 1890	Two-story, two-bay, brick residence; flat roof; dentils with pendants, panelled frieze; 1/1 windows, stone sills and lintels; two-story, three-sided bay; double glazed and panelled doors, transom; porch has plain cornice, turned spindles and columns, brackets and solid brick railing; good condition.
65		c. 1890	Two-and-one-half-story, two-bay, brick residence; gabled roof with cross gable on facade; latter has bracketed cornice panelled frieze; and pointed arch gable window; two-story, three-sided bay; 2/2 and 1/1 windows; radiating voussoirs with brick keystones; porch has plain cornice, straight balusters, brackets, turned columns, new stair rail; arched transom, sidelights; glazed and panelled door; good condition.
67		c. 1890	Four-story, two-bay, brick residence; flat roof; bracketed cornice, panelled and denticulated frieze; 2/2 windows, rock-faced stone sills and lintels joined by stone belt courses; central rounded bay; glazed and panelled doors with transoms; porch has straight spindles, brackets, turned columns, solid wood railing; good condition.
69		c. 1890	Three-story, two-bay, brick residence; flat roof; bracketed cornice, panelled frieze; three-story, rounded bay; 1/1 windows, rock-faced stone sills and lintels; modern porch, glazed and panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Benkard Avenue</u>		
73		c. 1890	Three-story, two-bay, brick residence; flat roof; bracketed cornice; dentil molding; panelled frieze; 2/2 windows; rock-faced stone lintels, smooth stone sills; three-story, three-sided bay is tarpapered; entry has smooth stone lintel, transom; altered doors; good condition.
75		c. 1890	Two-story, two-bay, brick residence; low-pitched gable roof; bracketed cornice, panelled frieze; casement windows; radiating voussoirs; stone sills; two-story, five-sided bay; double glazed panelled door with transom; porch has bracketed cornice, turned columns with brackets, round spindles and turned balusters; good condition.
77		c. 1890	Two-story, two-bay, brick residence; flat roof; bracketed cornice, dentil molding; panelled frieze; 1/1 windows; stone sills and lintels; two-story, rounded bay; elaborate porch with bracketed cornice; denticulated frieze, spindles, brackets, turned columns, new cast iron balusters and stair rail; glazed and panelled door; good condition.
79 - 81		c. 1890	Two-story, three-bay, two-family house of brick; flat roof; bracketed cornice, panelled frieze; dentil molding; 1/1 windows; stone sills and lintels; two-story, rounded bays; porch has pediment with sunburst panelled and denticulated frieze; round columns on square piers, turned balusters; two-story bay on west elevation; good condition.
83		c. 1890	Three-story, two-bay residence of brick; flat roof; bracketed cornice, panelled and denticulated frieze on facade and elevation; three-story, rounded bays on facade and east elevation; 1/1 windows; stone sills and lintels; entry and landing altered; good condition.
87		c. 1890	Two-story, three-bay, brick residence; flat roof; bracketed cornice, panelled and denticulated frieze; 1/1 windows; stone sills and lintels; porch is altered; double, glazed and panelled door with transom; good condition.
89		c. 1890	Two-story, three-bay, brick residence; flat roof; bracketed cornice; panelled frieze; 2/2 and 1/1 windows; radiating voussoirs; stone sills; glazed and panelled double doors with transom; porch has plain cornice, straight spindles, turned columns, straight balusters, raised basement; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Benkard Street</u>		
91		c. 1920	Modern three-bay, brick garage; flat roof; non-contributing.
105		c. 1880	Two-story, three-bay brick residence; Stone lintels and sills; 1/1 sash; replacement entry porch; bracketed wooden cornice; flat roof
107		c. 1880	Two-story, three-bay brick residence; full width wooden porch with columns; aluminum cornice; segmentally arched windows; stone sills; 2/2 sash; arched transom; pair of glazed doors; flat roof.
109		c. 1880	Two-story, three-bay brick residence; full width wooden porch; 2/2 and 2/1 sash; segmentally arched windows with stone sills; wooden bracketed cornice; turned and scroll-saw ornament; flat roof.
111		c. 1880	Two-story brick residence; full width wooden porch; 2/2 and 2/1 sash; segmentally arched windows with stone sills; wooden bracketed cornice; turned and scroll saw ornament; flat roof.
117		c. 1880	Two-story, three-bay brick residence; 2/2 and 2/1 sash; segmentally arched windows with stone sills; wooden bracketed cornice; turned and scroll saw ornament; flat roof; replacement porch.
119		c. 1880	Two-story, three-bay brick residence; 2/2 and 2/1 sash; segmentally arched windows with stone sills; wooden bracketed cornice; turned and scroll saw ornament; flat roof; full width porch.
121		c. 1880	Two-story, three-bay brick residence; 2/2 and 2/1 sash; segmentally arched windows with stone sills; wooden bracketed cornice; turned and scroll saw ornament; flat roof; replacement porch.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Benkard</u>		
	123	c. 1880	Two-story, three-bay brick residence; 2/2 and 2/1 sash; segmentally arched windows with stone sills; wooden bracketed cornice; turned and scroll saw ornament; flat roof; replacement porch.
	125	c. 1880	Two-story, three-bay brick residence; 2/2 and 2/1 sash; segmentally arched windows with stone sills; wooden bracketed cornice; turned and scroll saw ornament; flat roof; full width wooden porch.
	127-129	c. 1880	Two-story, six-bay brick double residence; full width wooden porch; 2/2 and 2/1 sash; segmentally arched windows with stone sills; wooden bracketed cornice; turned and scroll saw ornament; flat roof; 129 has replacement door.
	St. Francis Catholic Church	c. 1900	Red brick Romanesque church structure Two domed bell towers on facade; gabled entrance porch with concentric reveals; gable roof; copper domes with crosses; stone faced stairways and foundations; three arched framed windows with quatrefoil and tripartite stained glass; stone sills; Romanesque metal trim at roof and porch; south apse; cruciform plan; slate-sided clerestory and altar space.
	Rectory	c. 1900	Two-story, three-bay brick Romanesque residence; segmentally arched windows with stone sills; 2/2 and 1/1 sash; plain box cornice; slate roof; gabled dormers

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Benkard Avenue</u>		
14 - 16			Two-story, four-bay, double house of brick; flat roof; panelled sloping cornice; 1/1 windows; radiating voussoirs, rock-faced stone sills; two-story rounded bays; entries have common porch, plain cornice, round columns on railings of rock-faced cinder blocks; glazed panelled doors; good condition.
18		c. 1890	Two-story, two-bay residence of brick; flat roof; bracketed cornice, panelled frieze; 1/1 windows; rock-faced sills, lintels and water table; two-story rounded bay; entry retains transom but has new door; porch has plain cornice, panelled frieze; turned columns, new railing and landing; good condition.
20		c. 1890	Two-story, two-bay residence of brick; flat roof; panelled frieze; bracketed cornice; 1/1 windows; rock-faced stone sills, lintels and water table; rounded two-story bay; glazed and panelled door with transom; porch has plain cornice, panelled frieze, turned columns, straight balusters; good condition.
22		c. 1890	Two-story, two-bay brick residence with flat roof; bracketed cornice, panelled frieze; 1/1 windows; rock-faced stone sills, lintels and water table; glazed and panelled door with transom; porch has plain cornice, turned columns, panelled frieze, straight balusters; good condition.
24		c. 1890	Two-story, two-bay, brick residence with flat roof; bracketed cornice, panelled frieze; 1/1 rock-faced stone sills, lintels and water table; basement is stuccoed; porch has panelled frieze, brackets, turned columns, straight balusters, new stair rail; glazed and panelled door with transom; two-story rounded bay; good condition.
26 - 30		c. 1905	Two-story, six-bay, three-family residence of brick; flat roof; curved dentils; 1/1 windows; stone sills and lintels; rounded and square bays; 30 - entry is altered; other entries have glazed and panelled doors, new porches; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Benkard Avenue</u>		
	32 - 32 B	c. 1890	Three-story, two-bay residence of brick; flat roof; bracketed cornice, panelled and denticulated frieze; two-story, three-sided bays on top stories with panelling and shingling; 1/1 windows; stone sills and lintels; storefront with original cornice is bricked up with modern fenestration; good condition.
	32 Rear (on South Lander)	c. 1920	Two-bay garage; flat sloping roof; rock-faced cinder block; continuous brick lintel over braced batten garage doors; good condition. non-contributing
40		c. 1890	Three-story, three-bay brick residence; flat roof; bracketed cornice, panelled frieze; 2/2 windows; stone sills, lintels, and water table; entry has double glazed and panelled door with transom; landing has rock-faced cement block; good condition.
42		c. 1890	Two-story, three-bay brick residence; flat roof; bracketed cornice, panelled frieze; 1/1 windows, rock-faced stone lintels, sills and water table; two-bay-wide square bay; porch has plain cornice, Tuscan columns atop railing of rock-faced cinder blocks; good condition.
44		c. 1890	Two-story, two-bay brick residence; flat roof; panelled cornice and frieze; 1/1 and 2/2 windows; rock-faced stone sills and lintels; two-story rounded bay; porch has plain cornice, Tuscan columns atop brick railing with cement band; entry retains transom, door is new; good condition.
46		c. 1905	Three-story, three-bay, brick residence; flat roof; bracketed cornice; panelled and denticulated frieze; 1/1 windows, stone sills and lintels; porch has plain cornice; Tuscan columns, straight balusters; double glazed and panelled door; good condition.
48		c. 1890	Two-story, two-bay residence of brick; flat roof; elaborately panelled multi-tiered frieze; two-story, rounded bay; 1/1 windows; double radiating voussoirs; rock-faced stone sills and water table; porch has plain cornice, Tuscan columns on new brick railing; good condition.

EAST END I HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Benkard Avenue</u>		
50		c. 1890	Two-story, two-bay residence of brick; flat roof; elaborately panelled, multi-tiered cornice; two-story, rounded bay; 1/1 windows; double radiating voussoirs; rock-faced stone sills and water table; original porch removed; inner door is new but transom remains; good condition.
52		c. 1890	Two-story, two-bay residence of brick; raised basement; flat roof; bracketed cornice; panelled and denticulated frieze; 1/1 windows; double radiating voussoirs; stone sills; new porch; good condition.
54		c. 1890	Intact two-story, two bay residence of brick; flat roof; bracketed cornice, panelled and denticulated frieze; 1/1 and 2/2 windows; two-story, three-sided bay; East-lake porch with turned spindles, columns, balusters, brackets; double glazed and panel led doors with transom; good condition.
56 - 58		c. 1890	Two-story, four-bay residence of brick; flat roof, bracketed cornice, panelled frieze on facade and west elevation; 1/1 windows; rock-faced stone sills and lintels and water table; entry has round-arched transoms, glazed and panelled inner door; porch with plain cornice and frieze; turned columns, straight balusters, new stair rail; new columns, railing; good condition.
60		c. 1890	Two-story, two-bay brick residence; flat roof; panelled and denticulated frieze; 2/1 and 1/1 windows; three-sided bay with masonry panels between stories; triangular lintels, continuous sills on bay; entry retains arched transom and sidelights; door is new; new porch landing; east elevation: continuation of lintels and cornice; good condition.
62		c. 1890	One-and-one-half-story, two-bay residence of brick; full basement; mansard roof; shingled gabled dormer and flat-roofed dormer; molded cornice, denticulated and panelled frieze; clapboarded bay; porch has plain cornice, spindles, slender posts, single modern stair rail; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Benkard Avenue</u>		
64		c. 1890	Two-story, two-bay brick residence; stuccoed; flat roof; molded cornice and elaborately panelled frieze; two-story, rounded bay; 1/1 windows; porch has panelled frieze; round, panelled columns on cinder block piers, masonry urn-shaped balusters; porch base is smooth and rock-faced cinder block; glazed and panelled door; good condition.
66		c. 1890	Two-story, two-bay brick residence; flat roof; molded cornice and elaborately panelled frieze; 1/1 windows; double radiating voussoirs; rock-faced stone sills and water table; glazed and panelled door with arched transom; porch has plain cornice, panelled frieze, brackets, turned columns, decorative balusters; two-story, rounded bay; good condition.
68		c. 1890	Two-story, two-bay, brick residence; flat roof; elaborate brackets on cornice, dentils and panelling on frieze; two-story rounded bay intersected by porch roof; shingled and panelled c. 1920 porch has flared, square posts on brick piers, 1/1 windows; lintels with panelled keystone; modern door; good condition.
70		c. 1890	Two-story, two-bay brick residence; flat roof; bracketed cornice; panelled frieze; 2/2 and 1/1 windows; stone sills and lintels; three-sided, two-story bay; double glazed and panelled doors with transoms; good condition.
72		c. 1905	Three-story, two-bay brick residence; flat roof; bracketed cornice, denticulated and panelled frieze; 1/1 windows; stone sills and lintels; porch has plain cornice, new columns, baluster and stair rail; good condition.
74		c. 1905	Three-story, three-bay brick residence; flat roof; bracketed cornice; 2/2 windows; stone sills and lintels; two-story, three-sided bay on top stories; with new bricks; double glazed and panelled doors; porch has plain cornice, Tuscan columns, straights balusters, new stair rail; good condition.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Benkard Avenue</u>		
	76	c. 1905	Two-story, two-bay brick residence; flat roof; bracketed cornice, panelled frieze; two-story, rounded bay; 1/1 windows; rock-faced stone sills and lintels; porch has plain cornice, turned spindles and columns; brackets, straight replacement balusters; outside transom remains; glazed and panelled door; good condition.
	78	c. 1890	Two-story, two-bay residence of brick; flat roof; bracketed cornice; panelled frieze; 1/1 windows; double radiating voussoirs; stone sills; two-story, three-sided bay with simple, decorative brick panelling; double glazed, panelled doors with transom; porch altered; good condition.
	80	c. 1890	Two-story, three-bay, brick residence; flat roof; panelled frieze; two-story, rounded, shingled bay; 1/1 windows; rock-faced stone sills and lintels; porch has cornice with pendants, decorative frieze; brackets; columns, new railings and baluster; glazed and panelled door; good condition.
	80 Rear (on Clark Street)	c. 1910	Two-bay garage; rock-faced cinder block; flat roof; glazed and panelled doors; good condition. non-contributing
	84	c. 1890	Two-story, four-bay brick residence; flat roof; bracketed cornice, denticulated, panelled frieze; 1/1 windows; double radiating voussoirs; stone sills; porch has plain cornice, elaborate bargeboard under frieze; brackets, turned columns, new railings and stairs; entry retains transom, sidelights removed, panelled door; good condition.
	86	c. 1890	Two-story, two-bay residence of brick; raised basement; flat roof; bracketed cornice. denticulated panelled frieze; two-story, three-sided bay; 1/1 windows; radiating voussoirs; stone sills; entry retains transom, sidelights removed and new door; porch altered; good condition.
	88	c. 1890	Two-story, two-bay brick residence; flat roof; cornice is aluminum sided; 2/2 and 1/1 windows; stone sills and lintels; entry retains transom, sidelights removed, door is new; porch has plain cornice, denticulated frieze, brackets, turned columns and balusters; three-sided, two-story bay; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Benkard Avenue</u>		
92		c. 1890	Two-story, three-bay brick residence; flat roof; bracketed cornice; plain frieze; 2/2 sash; windows have double segmental arches; stone sills; porch has aluminum at very top, plain cornice, turned spindles, columns and balusters; entry has glazed and panelled door; good condition.
98		c. 1885	Two-story brick commercial structure; segmentally arched openings and stone sills; wooden bracketed cornice; later brick and frame additions.
100		c. 1885	Two-story, three-bay frame residence; wooden bracketed cornice; full-width porch with columns; 1/1 sash; asphalt sided; non-contributing garage.
102		c. 1885	Two-story, three-bay frame residence; wooden bracketed cornice; full-width porch with wrought-iron rail; 1/1 sash; asphalt sided; non-contributing garage.
104		c. 1900	Two-story, three-bay frame residence; aluminum sided; enclosed porch.
106		c. 1900	Three-story, three-bay frame residence full-width porch with replacement columns; second and third story oriel; aluminum cornice; 2/2 and 1/1 sash.
108		c. 1890	Three-story, three-bay brick residence; aluminum cornice; full-width porch with columns; stone lintels and sills; non-contributing garage.
110		c. 1885	Two-story, two-bay frame residence; full-width porch with columns; wooden bracketed cornice; 1/1 sash; contributing shed.
112		1909	One-story, three-bay school structure; limestone lintels and sills; center entrance; cobblestone foundation; gable roof; wooden bracketed cornice.
132		c. 1885	Two-story, three-bay frame residence; full-width porch, square posts; wooden bracketed cornice; 1/1 sash; asbestos siding.
136		c. 1950	Two-story, two-bay brick residence; gable roof; non-contributing; NC-g

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUN. , NEW YORK

<u>PHOTO#</u>	<u>STREET # NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Benkard Avenue</u>		
138		c. 1880	Two-story, two-bay brick residence; two-story rounded, three-windowed bay; stone lintels and sills; wooden bracketed cornice; wooden porch with wrought-iron rail.
140		c. 1880	Two-story, three-bay brick residence; wooden bracketed cornice; full-width porch; filigreed wrought-iron porch supports; stone lintels and sills; 1/1 sash.
142		c. 1880	Two-story, two-bay brick residence; two-story, three-windowed rounded bay; stone lintels and sills; wooden entrance porch with turned and scroll saw ornament and non-original lattice; 1/1 sash; rectangular transom; wooden bracketed cornice; replacement door.
144		c. 1880	Two-story, three-bay brick residence; full-width wooden porch; wooden bracketed cornice; 1/1 sash; stone lintels and sills; pair of glazed entrance doors.
146			Gate into void
148		c. 1880	Two-story, three-bay brick residence; full-width wooden porch; wooden bracketed cornice; 1/1 sash; stone lintels and sills.
	<u>Broad Street</u>		
53		c. 1852	Large, two-and-one-half-story, four-to five-bay clapboarded residence with full basement; gabled roof with cross gables having ornate bargeboard; gabled dormers have similar treatment; enclosed porch and three-sided bays have decorative, bracketed cornices and friezes; former has Gothic style arches between its columns; 1/1 and 6/6 sash and doorway have period surrounds.
87		c. 1842	Two-and-one-half-story, four-bay, clapboarded residence; gabled roof with central chimney; molded cornice and decorative frieze; 2/2 windows; at right is projection with three-sided bay; panelled door and side-lights; one-story porch across front and left side has Doric columns and railings.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Broad Street</u>		
60			See 1 R Forsyth Place.
80		c. 1905	Large, two-and-one-half-story, five bay, clapboarded residence; gambrel roof, end faces street; molded cornice with modillion blocks; plain frieze; 6/6 sash, also Palladian type; oculus and quarter-round windows; classical porch with columns atop solid railing wraps around right side; full-height pilasters at corners; entrance has panelled door, transom and sidelights; good condition.
	<u>Broadway</u>		
75		c. 1862	Two-story, three-bay, brick, fire station; flat roof with round arch in center of facade; bracketed cornice; dentil molding; second-story has round-arched surround with two round-arched windows set inside, flanked by single round-arched windows, separated by pilasters; first-story -- glazed and panelled door with transom; large garage door; good condition.
77-79		c. 1895	Four-story, six-bay, brick commercial/residential structure; flat roof; molded cornice with urns and parapet; denticulated 1/1 sash, some have arched surrounds, others have stone sills and lintels; recessed entries with cast iron columns; pilasters; display windows with panelling, glazed and panelled door, transoms, sidelights, and some alterations; good condition.
83	City Hall	c. 1895	Three-story, five-bay, brick commercial structure; flat roof; elaborately bracketed cornice and denticulated frieze; 1/1 sash; third story has tall windows topped by smaller with stained glass, central one is tripartite and has round-arched window at top; stone lintels and sills; molded store front cornice; entry has round-arched door, surrounded by modern doors; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Broadway</u>		
	87-89	c. 1895	Four-story, six-bay brick commercial/residential structure; low-pitched gable roof; bracketed cornice; panelled frieze; 2/2 windows; stone sills and lintels; storefront is altered; good condition.
	107-109	c. 1950	Cinema 1 & 2 -- First floor of Hotel Newburgh building. Defunct theatre with marquee. Non-contributing.
	111-113-115-117	c. 1940	Hotel Newburgh -- contemporary brick facade. Non-contributing.
	119	c. 1890	Three-story, four-bay brick commercial/residential structure; 1/1 sash, stone lintels; bracketed cornice; completely altered first floor storefront; fair condition
	121-123	c. 1930	Three-story sandstone commercial; Art Deco; ornamental roof line; copper trim accents on storefront windows and facade; good condition.
	125	c. 1900	Three-story, three-bay brick commercial/residential structure; 1/1 sash; sandstone lintels; bracketed cornice; severely altered storefront; fair condition.
	127-129	c. 1880	Three-story, eight-bay commercial structure; aluminum siding and cornice; 1/1 sash; altered storefront.
	131	c. 1970	Two-story commercial; non-contributing
	143-147	1879	New York State Armory; A two-story, five-bay structure, the armory is an imposing, painted brick building with a central crenelated tower rising a full story above the flanking roofline. The facade is surmounted by a brick arcaded frieze and bracketed sheet iron cornice. Fenestration is symmetrical, consisting of paired and triple windows with granite lintels and sills and 4/4 sashes. Brick belt courses connect the hooded lintels and sills. At the corners of the facade are canted, tower-like projections at the second-story level, with narrow openings on the side and a window on the chamfer, supported by brick corbelling and carved granite blocks and surmounted by a crenelated parapet. Twentieth-century storefronts obscure the first story.

EAST      END      ISTORIC DISTRICT, NEWBURGH, ORANGE COUN. , NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Broadway</u>		
	151	c. 1890	Two-story, two-bay brick commercial; second story altered to large window; bracketed cornice; eight bays deep; fair condition.
	153	c. 1960	One-story commercial; non-contributing
	155	c. 1870	Three-story brick commercial/residential; 2/1 windows; arched brick; poor condition.
	157	c. 1880	Three-story brick commercial/residential; curved stone lintels over windows and entranceway. Third floor windows 2/2; second floor 2/1; Bracketed wooden cornice, original stone steps to entrance. First floor window altered for commercial use. Raised basement; glass brick over top of storefront window; good condition.
	159-161	c. 1910	Two-story, three-bay commercial; metal cornice, original storefront; non-contributing signage; three segmentally arched window units on second story.
	163	c. 1880	Four-story brick commercial/residential; four bays; bracketed wooden cornice; altered non-contributing storefront.
	165	c. 1880	Three-story, three-bay brick commercial/residential. 1/1 sash; wooden bracketed cornice; original storefront; fair condition.
	167		One-story commercial; non-contributing.
	169	c. 1865	Three-story brick commercial/residential; two bays; stone lintels; wooden bracketed cornice; wooden pilasters each side of first floor; original clapboard on portion of store front. Condition: fair.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Broadway</u>		
	171	c. 1875	Three-story, three-bay, brick commercial/residential; ornamental sills; curved brick top; flat roof; original residential doorway with contemporary door; original storefront; good condition.
	173	c. 1910	Three-story, five-bay brick; original Salvation Army Headquarters; second floor -- six casement windows with diamond-paned small windows above; topped by curved brick arch with keystone; third floor -- diamond-paned upper casement windows; stone lintels with keystones; flat roof; third floor facade; distinctive roof line with Salvation Army logo; distinctive original stained-glass window above second front entrance; primary entrance has ornamental masonry trim. good condition.
	175	c. 1875	Three-story, three-bay frame residence with commercial alterations.
	177-179	c. 1935	Clark Street Diner; Art Deco; poor condition.
	181	c. 1850, 1960	Three-story brick commercial/residential; original three-bay altered by second story with huge picture window; pitched roof; original first floor entryway; contemporary panel door added.
	183	c. 1960	Two-story commercial brick; non-contributing.
	185	c. 1920	Three-story, four-bay brick commercial/residential; 1/1 sash; storefront altered.
	187	c. 1880	Three-story, three-bay commercial/residential; 2/2 sash with stone lintels; fair condition.
	189	c. 1880	Three-story, three-bay brick commercial/residential; 2/2 sash with stone lintels; fair condition.
	191	c. 1880	Three-story, three-bay brick commercial/residential; 2/2 sash; bracketed wooden cornice; altered storefront; fair condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Broadway</u>		
	193	c. 1880	Four-story, three-bay brick commercial/residential with iron post at commercial entrance; Four bays deep; bracketed wooden cornice; 2/2 sash; good condition.
	195	c. 1880	Three-story, three-bay brick commercial/residential; 2/2 sash; stone lintels; bracketed wooden cornice; good condition.
	197	c. 1850	Two-story frame, clapboard residence with first floor commercial storefront; simple bracketed cornice; peaked roof; fair condition.
	199-201	c. 1920, 1960	One-story commercial; altered storefront; non-contributing.
	203	c. 1850, 1960	Two-story brick residence with non-contributing commercial storefront.
	205	c. 1870	Three-story, <del>four</del> bay brick commercial/residential; three curved bays with curved stone lintels and sills; gabled roof; barge boards; field-stone steps with contemporary wrought iron railing; good condition.
	207	c. 1870	Three-story, three-bay brick commercial/residential; 6/6 and 2/2 sash; curved brick lintels; wooden bracketed cornice; good condition.
	209	c. 1880	Three-story commercial/residential; altered.
	211-217	c. 1970	Modern commercial; non-contributing.
	219	c. 1865	Three-story, three-bay brick commercial/residential; 1/1 sash; segmentally arched windows, stone lintels; good condition.
	221	c. 1865	Three-story, three-bay brick commercial/residential; 1/1 sash; segmentally arched windows, stone lintels; original store front and residential entrance; good condition.
	223	c. 1960	One-story commercial; non-contrib.
	225-233	c. 1915	One-story commercial; California Mission style; clay tile roof, pitched over three windows, sloped over two; fanned glass over each doorway; segmentally arched windows and doors.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Broadway</u>		
	235-243	c. 1880	Three-story brick, 8-bay, commercial/residential structure, 1/1 sash; stone lintels and sills; first floor altered for commercial use.
	245-247	c. 1925	Three-story brick, extensively altered; commercial.
	249	c. 1875, c. 1925	Three-story brick commercial structure; bracketed wooden cornice; original 3-bay converted to 2 with casement windows.
	251	c. 1875	Three-story brick, three-bay commercial/residential structure; bracketed wooden cornice with arched brick lintels; stone sills; altered storefront.
	253	c. 1900, c. 1945	Two-story commercial; non-contributing.
	255	c. 1885	Three-story brick with granite facade. Original Columbian Hose Co. #2 Fire Station. Ornate bracketed wooden cornice; third story has four windows, each with small stained glass panel above; doors altered; condition good.
	257	c. 1880	Three-story, three-bay brick commercial/residential structure; 6/1 sash; segmentally arched brick windows with stone sills; first floor altered for commercial use; good condition.
	259	c. 1925	One-story commercial; sandstone with marble; Broadway Garage -- Buick Agency; etched glass above plate glass windows; good condition.

## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Broadway</u>		
	Good Shepherd Church	1890	Two-story, three-bay church structure of modified Gothic design with prominent crenellated tower with louvered lancets and Gothic door openings; hipped roof
279		c. 1875	Three-story, three-bay brick commercial/residential; Ornate bracketed wooden cornice; segmentally arched windows; condition good.
281		c. 1865	Three-story, three-bay brick commercial/residential; 1/1 sash; Wooden pilasters on either side of door. Original wooden store front. Good condition.
283		c. 1865	Three-story, three-bay brick commercial/residential; wooden bracketed cornice; altered store front; good condition.
285		c. 1865	Three-story, six-bay brick commercial/residential; stone sills and lintels with ornamental top; detailed masonry. Wooden bracketed cornice. altered store front; good condition.
72-78		c. 1902	Three-story, seven-bay brick commercial structure; flat roof; corner rounded; single and paired 1/1 sash; rock-faced stone sills and lintels; first story is very tall, windows are embraced by round arches with keystones and pilasters; entrance has stone Doric columns; "Columbus Trust Co." engraved in frieze; elaborately carved stone clock; towards river is two-story section with flat roof; some alterations in far corner; good condition.
86		c. 1895	Four-story, two-bay brick commercial/residential structure; flat roof; facade covered with shiny metal; three-sided, three-story bay on top three stories; storefront has recessed entry with alterations; good condition.
88		c. 1980	Two-story, three-bay brick commercial building; flat roof with metal band at top; extensive alterations; non-contributing.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Broadway</u>		
	90	c. 1910	Three-story, four-bay commercial building; flat roof with parapet; numerous stuccoed decorative panels; 6/1 sash at third story; triple window flanked by single windows on second story; storefront has simple cornice, deeply recessed entry, flanked by original display windows; double glazed and panelled doors with round-arched transom; good condition
	94	c. 1920	Three-story, three-bay dressed stone commercial structure; parapet roof with cornice near top; denticulation; panelled frieze; decorative panels on attic story; second story has denticulation; "Newburgh Savings Bank" engraved on frieze; central entry is embraced by tall rounded arch, flanked by pilasters; doorway is single large glass area and is flanked by carved stone; good condition.
	96	c. 1850	Three-story, three-bay brick commercial/residential; bracketed sheet metal cornice; sandstone lintels; early 20th-century storefront; louvered windows; fair condition.
	100	1890	Three-story, four-bay brick commercial altered non-contributing storefront; bracketed wood cornice; stone and terra cotta outer trim; 1/1 sash; good condition.
	104	c. 1870	Three-story, four-bay brick commercial/residential; altered non-contributing storefront; wood bracketed cornice; sandstone lintels and sills; 6/6 replaced sash; fair condition.
	106	c. 1940	Two-story, three-bay masonry commercial; Art Deco detail second story; altered non-conforming storefront; replacement windows; non-contributing.
	108	c. 1870	Three-story, three-bay brick commercial/residential; bracketed cornice; 20th-century storefront; segmentally arched windows; replacement metal sash; fair condition.
	110	c. 1870	Three-story, four-bay white veneer pseudo-brick faced commercial/residential structure; 20th-century alterations; bracketed cornice; 1/1 sash.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Broadway</u>		
	112	c. 1890	Three-story, three-bay brick commercial/residential structure; intact storefront; arched entrance; wooden bracketed cornice; 1/1 sash; fair condition.
	114-116	c. 1870	Three-story, three-bay brick commercial/residential; two altered non-contributing storefronts; <del>segmentally</del> arched windows; 1/1 sash; fair condition.
	118	c. 1900	Two-story frame commercial/residential structure with clapboard siding; altered storefront; three-part picture windows on second floor; fair condition.
	120-124	c. 1980	Two-story masonry/stucco commercial; non-contributing.
	126	c. 1970	One-story commercial; non-contributing
	128-130	c. 1935	F. W. Woolworth; intact storefront; two-story masonry, brick and stone veneer; aluminum awning.
	132-134-136	c. 1860	Three attached four-story, three- and two-bay brick commercial/residential structures; three altered non-contributing storefronts; wooden bracketed cornice; segmentally arched windows; mansard roof; segmentally arched dormers; poor condition.
	138-142	c. 1860	Three attached four-story, three- and four-bay brick commercial/residential structures; <del>three altered</del> non-contributing storefronts; wooden bracketed cornice; 1/1 sash; segmentally arched windows; poor condition.
	144	c. 1925	Two-story, two-bay brick commercial/residential structure; altered storefront; bricked corbelled cornice; gabled roof; compound casement windows on second story; good condition.
	144½-146	c. 1850	1½-story frame residential structure converted to commercial; two c. 1950 common non-contributing storefronts; gabled roof; fair condition.

EAST      END      ISTORIC DISTRICT, NEWBURGH, ORANGE COUN.      NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Broadway</u>		
148		c. 1850	Two-story, three-bay frame residence; later 19th century storefront; asbestos siding; gabled roof; poor condition.
150		c. 1870	Three-story, three-bay brick commercial/residential; altered non-contributing storefront; altered cornice; segmentally arched windows; no sash; poor condition.
152-154		c. 1860	Two attached three-story, three-bay brick commercial/residential; two altered non-contributing storefronts; cornice removed; sandstone lintels; no sash; poor condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	Broadway		
156		C. 1870	Three story brick commercial/residential, 3 bays, altered store front, seg. arched, wood cornice fire damaged, poor condition.
158		c. 1870	Three story brick, 3 bays, commercial residential, 20th century store front seg arched windows 2/2, wood bracketed cornice. Good condition.
160		c. 1875	Three story brick, 3 bays, altered non contributing store front, seg. arched windows 2/2 sash, wood bracketed cornice; good condition.
162		c. 1870	Four story brick, commercial/residential 3 bays, intact store front, seg arched windows with key stone, 2/2 sash, wood bracketed cornice, fair condition
164		c. 1870	Four story brick commercial/residential 3 bays, intact store front, seg arched windows with key stone, 2/2 sash, wood bracketed cornice, fair condition.
166		c. 1870	Four story brick commercial/residential 3 bays, altered store front, seg arched windows with key stone, 2/2 sash, wood bracketed cornice, fair condition.
170 - 172		c. 1870	Four story brick commercial/residential 5 bays, altered non contributing store front, stone seg. arched windows, 2/2 sash, wood bracketed cornice, fair condition.
174 - 178		c. 1870	Four story brick commercial/residential altered non contributing store front, iron lintels, 2/2 sash, wood bracketed cornice, fair condition.
180		c. 1870	Three story frame commercial/residential, altered non-contributing store front 2/2 sash, wood bracketed cornice, alum siding, fair condition.
182		c. 1870	Three story frame, commercial/residential, 3 bays, altered store front, 2/2 sash, wood bracketed cornice, vinyl siding, pseudo stone facing, fair condition.

EAST END | HISTORIC DISTRICT NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	184 - 186	c. 1830	Three story brick residential/commercial, altered non-contributing store front, 4 bays, 2nd story windows shortened, box cornice, gabled roof, fair condition.
	188 194	c. 1870	Three story brick commercial/residential 4 bays, altered non-contributing store front, decorative seg. arched windows, 2/2 sash, wood bracketed cornice, ornamental brick work. good cond.
	190	c. 1870	Three story brick commercial/residential 4 bays, contributing store front, decorative seg. arched windows, 2/2 sash, wood bracketed cornice. ornamental brick work, good condition.
	192	c. 1870	Three story brick commercial/residential 4 bays, contributing store front of carra glass enameled paneled, decorative seg. arched windows, 2/2 sash, wood bracketed cornice, good condition.
	194	c. 1870	Three Story brick, commercial/residential 3 bays, altered non-contributing store front, decorative seg. arched windows, 2/2 sash, wood bracketed cornice, good condition.
	196	c. 1880	Two story brick commercial/residential altered store front non-contributing, altered 2nd story windows, fair cond.
	198 - 200	c. 1850	Three story frame commercial/residential altered non-contributing store front.
	202	c. 1870	Three story brick commercial, 3 bays, residential, altered non-contributing store front, seg. arched windows, 1/1 sash, seg. arched dormers, slate mansard roof, fair condition.
	204	c. 1850	Three story frame, 3 bays, commercial residential, altered non-contributing store front, 1/1 sash, alum siding, fair conditon.
	206	c. 1850	Three story frame commercial/residential 4 bays, altered non-contributing store front, pseudo brick asphalt siding, 1/1 sash, good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	Broadway		
	208 - 210	c. 1850	Three story commercial/residential 6 bays, two non-contributing store fronts altered, 1/1 sash, asbestos siding, wood bracketed cornice, fair condition.
	212	c. 1860	Three story brick commercial/residential, 3 bays, altered store front, seg. arched windows, 1/1 sash wood bracketed cornice, fair condition.
	214	c. 1875	Three story brick commercial/residential, 3 bays, altered store front, wood bracketed cornice, brown stone flat windows, 1/1 sash. good condition.
	216	c. 1875	Three story brick commercial/residential 3 bays, altered non-contributing store front, shortened windows, non-contributing sash, wood bracketed cornice, fair condition.
	218 - 220	c. 1900	Three story brick commercial/residential 5 bays, corbeled cornice (parapet) keyed windows, stone flat arc hess corner oriented entrance (frame key) altered store fronts, 1/1 sash, fair condition.
	222 - 224	c. 1875	Three story brick commercial/residential 4 bays, 1/1 sash, altered non-contributing store front, stone flat arched windows, wooden bracketed cornice, good condition.
	228	c. 1850	Three story frame, commercial/residential, Altered store front non-contributing, alum siding, 2/2 windows, fair condition.
	230	c. 1875	Three story brick, commercial/residential, 4 bays, intact store front; stone flat arched windows, 1/1 sash, wood bracketed cornice, good condition.
	232	c. 1860	Three story frame, commercial/residential, 4 bays, 2 intact store fronts, pseudo brick asphalt siding, 1/1 sash, wood bracketed cornice, poor condition



EAST      END      HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	Broadway		
	234	c. 1960	Two story masonry & steel non-contributing.
	236	c. 1920	Two story brick commercial, 2 bays, intact store front, upper level picture window, parapet cornice, good condition.
	238	c. 1870	Three story brick, commercial/residential, 2 intact store fronts, flat arched marble windows, 1/1 sash, parapet cornice, early 20th century facade 5 bays, good condition.
	240	c. 1860	Three story commercial/residential brick, 3 bays, altered non-contributing store front, 1/1 sash, seg. arched windows, bracketed cornice, good condition.
	242	c. 1870	Three story brick commercial/residential, 3 bays, altered store front, corbeled seg. arched windows, 1/1 sash wood bracketed cornice, slate mansard roof, 2/2 seg. arched dormers, fair condition.
	244 - 248	c. 1895	Two story brick, commercial only, 5 bays, with flanking single story wings, altered non-contributing store fronts. arched & flat arched windows, parapet cornice, decorative brick bonding, fair condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Campbell Street</u>		
11		c. 1800, c. 1900	Two-story house/outbuilding faced with stone.
63		c. 1880	Two-story, three-bay brick residence; low-pitched gable roof; molded and bracketed cornice; panelled frieze; 2/2 sash; segmentally arched windows; panelled door with two-light transom; water table; good condition.
65		c. 1870	Two-and-one-half-story, three-bay residence; aluminum siding; gabled roof; molded and bracketed cornice; 6/6 sash; simple porch with Ionic columns on solid railing; panelled door; good condition.
44		c. 1945	One-story, one-bay quonset hut-type garage; sheet metal; panelled garage door; dome roof; non-contributing.
62		c. 1880	Two-story, three-bay brick residence; flat roof; molded and bracketed cornice; panelled frieze; 2/2 sash; double entrance door with arched panels; good condition.
64		c. 1880	Three-story, three-bay brick residence; flat roof; bold, molded and bracketed cornice; panelled frieze; 1/1 sash; glazed outer door; classical porch with Ionic columns; good condition.
66		c. 1870	Three-story, three-bay, clapboarded residence; low-pitched gable roof; molded and bracketed cornice; panelled frieze; 1/1 sash; glazed outer door; classical porch with Ionic columns; good condition.
68		c. 1870	Four-story, three-bay brick residence; flat roof; molded and bracketed cornice; panelled frieze; 2/2 sash (some boarded up); panelled doors on first and second stories at right; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Carson Avenue</u>		
	5 - 7	c. 1890	Two-story, four-bay double house with aluminum and asbestos siding; flat roof; bracketed cornice and dentil molding; two-story bay with flared second story on either side; 1/1 windows; glazed and panelled doors; common porch; # 5 has turned spindles, columns, balusters, cutwork brackets; # 7 has turned columns and straight balusters; good condition.
9		c. 1890	Three-bay, two-story residence; asbestos siding; multi-gabled roof; main end faces street; pediment has tripartite louvered window with sunburst panels atop; 1/1 windows; two-story bay; flared second story; porch completely enclosed; good condition.
42			See 13 - 15R South Liberty Street.
44 - 48		c. 1890	Two attached two-story, 3-bay brick row houses; flat roof; molded, bracketed cornice; 3 triangular, full-height bays with entries to right of each; doors are double, glazed and panelled with transoms; porch with molded cornice and turned columns remains; 1/1 sash; good condition.
50 - 52		c. 1890	Two-story, four-bay, brick, double house; flat roof; molded and bracketed cornice; panelled frieze; 1/1 windows with stone lintels and sills; two full-height, three-sided bays; two central glazed and panelled doors; porch at left has molded cornice and Doric columns; good condition.
54		c. 1890	Two-story, three-bay, brick residence; low-pitched gable roof; molded cornice, plain frieze; architrave; 1/1 windows; stone lintels and sills; glazed and panelled double doors; classical porch with Doric columns and turned balusters; good condition.
56 - 58		c. 1890	Two-story, four-bay, brick double house; with two full-height, three-sided bays; flat roof; molded and bracketed cornice; panelled frieze; 1/1 windows with continuous stone lintels and sills; glazed and panelled doors to right of each bay; classical cornices and friezes, turned columns and balusters; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Carson Avenue</u>		
60		c. 1890	Two-story, two-bay residence with aluminum siding; flat roof; molded cornice; full-heights, three-sided bay; 1/1 windows; glazed and panelled door; new porch; good condition.
70 - 72½		c. 1890	Two-story, six-bay, brick double house; low-pitched gable roof; two full-height, square projections either side of two entries; molded and bracketed cornice; plain frieze; 1/1 windows with stone lintels and sills; glazed and panelled doors; common central porch with molded cornice, spindle frieze; turned columns and balusters; good condition.
74			Three-story, two-bay, brick residence faced with perma-stone; flat roof; aluminum side cornices; 1/1 windows; rounded bay at right; new entrance door and hood; right elevation also has rounded bay; good condition.
74 R (on S. Lander St.)		c. 1920	One-story, two-bay, brick garage; flat roof; good condition. non-contributing.
76		c. 1890	Two-story, two-bay, brick house with raised basement; low-pitched gable roof; bracketed cornice and panelled frieze; two-and-one-half-story, three-sided bay; 1/1 windows; radiating voussoirs and stone sills; double, glazed and panelled doors; good condition.
80		c. 1890	Two-and-one-half-story, three-bay residence with aluminum siding; gabled roof; left side of facade projects with gable-end to street; 1/1 windows; enclosed front porch; good condition.
82		c. 1890	Two-story, three-bay residence; aluminum siding; flat roof; boxed cornice and plain frieze; 1/1 windows; glazed and panelled door; altered porch, good condition.
84		c. 1890	Two-story, three-bay, brick residence; flat roof; molded and bracketed cornice; panelled frieze; full-height, rounded bay at left; 1/1 windows; stone lintels, sills and water table; panelled door; altered porch; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Carson Avenue</u>		
	86 - 88	c. 1890	Two attached 2-story, 2-bay, brick residences with raised basements; flat roof; molded cornice; plain frieze; full-height, three-sided bay to either side of two entries; 1/1 sash; seg. arched windows with stone sills; glazed and panelled doors; porch has molded cornice, turned columns, balusters.
94		c. 1890	Two-story, two-bay, brick residence with raised basement; flat roof; molded cornice and decorative frieze; 1/1 windows with stone lintels and sills; glazed and panelled doors; rounded, full-height bay at left; altered porch; good condition.
96		c. 1890	Two-story, two-bay, brick residence; flat roof; molded cornice and frieze; 1/1 windows with stone lintels and sills; rounded full-height bay at right, glazed and panelled doors; altered porch, good condition.
98		c. 1890	Two-story, two-bay, brick residence, flat roof; molded cornice and frieze; 1/1 windows with stone lintels and sills; rounded, full-height bay at left; glazed and panelled doors; period porch; good condition.
100		c. 1890	Two and one half-story, three-bay residence; aluminum siding; gabled roof with cross gable; enclosed porch; bracketed cornice; 1/1 windows; good condition.
102		c. 1890	Two-story, two-bay, brick residence; flat roof; molded and bracketed cornice; denticulated and panelled frieze; 1/1 windows with stone lintels and sills; porch with bracketed cornice. turned columns and balusters and modern additions; glazed and panelled doors; good condition.
104		c. 1890	Two-story, two-bay residence; aluminum siding; flat roof; 1/1 and 2/2 windows; plain cornice and frieze; three-sided, two-story bay at left; decorative porch with molded and bracketed cornice; turned spool-frieze, columns and balusters, brackets; glazed and panelled doors; good condition.
106		c. 1890	Two-story, two-bay, brick residence with full basement; flat roof; molded and bracketed cornice; panelled frieze; full-height, rounded bay at left; 1/1 windows with stone lintels and sills; glazed and panelled doors; good condition.
112			See 11 R Monument Street.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Carson Avenue</u>		
2		c. 1890	Two-bay, two-story, clapboarded residence with full basement; flat roof; bracketed cornice and panelled frieze; two-story, shingled bay on east and north elevations, panelling between windows; double, glazed and panelled doors; elaborate porch with bracketed cornice, turned spindles, columns, balusters, cutwork brackets; good condition.
4 - 6		c. 1890	Two-story, two-bay, double residence with full basement; asbestos siding; flat roof; bracketed cornice and panelled frieze; 1/1 windows; second story, three-sided bay on each residence; glazed and panelled doors to left of each bay side; common porch across facade with bracketed cornice, panelled frieze and square posts; # 4 has turned spindles, fan-type brackets, straight balusters and original turned end posts; # 6 has straight and turned balusters; posts altered; good condition.
8 - 10		c. 1890	Two-story, two-bay, double residence with full basement; flat roof; bracketed cornice; panelled frieze; asbestos siding; 1/1 windows; second story, three-sided bay on each residence; glazed and panelled doors to left of each bay-side; two porches with bracketed cornices, turned spindles, cutwork brackets, turned columns and balusters; good condition.
47		c. 1890	Two and one half-story, two-bay residence with asbestos siding; gabled roof; left section projects with pediment atop two-story, three-bay; pediment window has decorative surround and is supported by brackets; 1/1 windows; double, glazed and panelled doors; classical porch with Doric columns and turned balusters; good condition.
49		c. 1890	Two-story, three-bay, brick residence with flat roof; molded and bracketed cornice; panelled frieze; full-height, three-sided bay; 1/1 windows; stone lintels and sills and water-table; glazed and panelled double doors; classical porch with enclosed second story, Doric columns and turned balusters; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Carson Avenue</u>		
51		c. 1890	Two-story, two-bay, clapboarded residence with raised basement; gabled roof; left section projects with pediment atop two-story, three-sided bay; pediment has decorative shingles, window surround and supporting brackets; 1/1 windows, double, glazed and panelled doors, classical porch with Doric columns and turned balusters; good condition.
53		c. 1890	Two-story, two-bay residence with raised basement; tarpaper siding; gabled roof; left section projects with pediment atop two-story, three-sided bay; pediment has decorative shingles, window surround and supporting brackets; 1/1 windows, double, glazed and panelled doors; classical porch with Doric columns and turned balusters; good condition.
55		c. 1890	Two-and-one-half-story, three-bay residence; aluminum siding; gabled roof; boxed cornice with modillion blocks; 2/2 windows; panelled door, transom, and one sidelight panel; classical porch with Doric columns and turned balusters; good condition.
59		c. 1890	Two-and-one-half-story, three-bay residence; aluminum siding; gabled roof with cross gables; triple and single 1/1 windows; glazed and panelled door; porch has shed roof, arched spans between square posts and lattice-type baluster; good condition.
61		c. 1890	Two-and-one-half-story, three-bay residence; clapboarded; gabled roof with cross gable; triple and single 2/2 windows; pediment has "half-timbered" effect; glazed and panelled door; porch has shed roof, arched span between square posts and balusters; good condition.
63		c. 1890	Two-and-one-half-story, three-bay residence; aluminum siding; gabled roof with cross gables; triple and single 2/2 windows; glazed and panelled door; porch has shed roof, arched span between square posts and balusters; good condition.
65		c. 1890	Two-and-one-half-story, three-bay residence with asbestos siding; gabled roof with cross gables; triple and single 2/2 windows; glazed and panelled door; porch has shed roof, arched spans between square posts and lattice-type balusters; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Carson Avenue</u>		
67		c. 1890	Two-and-one-half-story, three-bay residence; aluminum siding; gabled roof with cross gables; double and single 2/2 windows; glazed and panelled door; porch has shed roof, square posts and balusters; good condition.
69 - 71		c. 1890	Three-story, four-bay, brick double house, molded cornice and panelled frieze; single or double 1/1 windows; right side of each section has second-story, projecting bay; left side has entry with glazed and panelled door; porches with shed roof, brackets, turned columns and balusters; good condition.
75		c. 1920	One-story, two-bay, brick commercial structure; flat roof with parapet; large, six-light window and glazed door; good condition.
79 - 81		c. 1890	Two-and-one-half-story, four-bay, brick double house; flat roof; molded and bracketed cornice; plain frieze; rounded bays on either end; 1/1 windows; stone lintels, sills and water table; central glazed and panelled doors; simple porches with shed roofs, turned members and some alterations; good condition.
83 - 85		c. 1890	Two-and-one-half-story, four-bay, double house; asbestos siding; low-pitched gable roof; molded and bracketed cornice; panelled frieze; full-height, three-sided bays at either end; 2/2 windows; panelled doors; simple porch with Doric columns and some alterations; good condition.
87		c. 1890	Two-and-one-half-story, two-bay, brick residence; flat roof; molded and bracketed cornice; panelled frieze; stone lintels and sills; 1/1 windows; porch with molded cornice; decorative cutwork frieze; turned columns and balusters; good condition.
89		c. 1890	Two-and-one-half-story, two-bay brick residence; flat roof, rounded bay at left; molded cornice and decorative frieze; 1/1 windows; radiating voussoirs and stone sills; panelled door; porch cornice is similar to main one; turned columns and balusters; good condition.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Carson Avenue</u>		
91		c. 1890	Two-and-one-half-story, two-bay, brick residence; flat roof; rounded bay at left; molded and bracketed cornice, panelled frieze; 1/1 windows with stone lintels and sills; glazed and panelled door; porch has plain cornice, decorative trim, turned columns and balusters; good condition.
93		c. 1890	Two-and-one-half-story, two-bay, brick residence; flat roof; rounded bay at right; molded and bracketed cornice; panelled frieze; 1/1 windows with stone lintels and sills; glazed and panelled door; porch has plain cornice, decorative trim, turned columns and balusters; good condition.
95		c. 1890	Two-story, three-bay residence; aluminum siding; low-pitched gable roof; boxed cornice; 2/2 windows; panelled door; single porch with alterations; good condition.
97		c. 1890	Two and one half-story, two-bay, brick residence; flat roof; rounded bay at left; molded cornice, plain frieze and architrave; 1/1 windows with stone lintels and sills; glazed and panelled door; new porch; good condition.
99		c. 1890	Two-and-one-half-story, three-bay, brick residence; flat roof; boldly molded and bracketed cornice; plain frieze; 1/1 single and double windows with stone lintels and sills; right section of facade projects; at left is glazed and panelled door; porch with plain cornice and frieze, square posts atop brick piers and turned balusters; good condition.
101		c. 1890	Two-and-one-half-story, three-bay, brick residence; flat roof; boldly molded and bracketed cornice; plain frieze; 1/1 single and double windows with stone lintels and sills; left side of facade projects; at right is panelled entrance; new porch; good condition.
103		c. 1890	Three-and-one-half-story, two-bay, brick residence; flat roof; molded and bracketed cornice; decorative frieze; rounded bay at left; 1/1 windows with stone lintels and sills; double, glazed and panelled doors; classical porch with Doric columns and turned balusters; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
<u>Carson Avenue</u>			
105		c. 1900	Two-story, two-bay residence; aluminum siding; molded cornice; modern windows and doors, latter recessed.
113			See 17 R Monument Street
<u>Carter Street</u>			
2		c. 1895	One-story, four-bay, brick commercial structure; stone belt course; flat roof; double 1/1 sash; classical door surround with columns, transom, sidelights; at left is garage wing.
<u>Chambers Street</u>			
9-11		c. 1875	Four-story, six-bay brick commercial structure; flat roof; bracketed cornice and panelled frieze; windows are boarded up or 12/12 sash; storefront has cornice with brackets; display windows; double, glazed and panelled doors, transom; "9" and "11" in panels on frieze between stories; brackets are in shape of babies sitting on brackets and holding up cornice.
13		c. 1885	Four-story, three-bay brick commercial structure; flat roof; elaborately panelled cornice and frieze; stone sills and lintels; windows altered; storefront has cornice with brackets at either end; double, glazed and panelled doors with transom; storefront bricked up with new door and windows.
29		c. 1895, c. 1920	Two-story, three-bay brick commercial structure; facade altered with parapet with brick panel, double windows and new windows; entry has single, altered doorway.
33		c. 1855	Two-story, three-bay brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 and 2/2 sash; segmentally arched windows; entry has partially enclosed transom.

EAST END HISTORIC DISTRICT, NEWBURGH ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Chambers Street</u>		
37		c. 1885	Two-story, three-bay brick commercial structure; flat roof; bracketed cornice and plain frieze; second-story central window was a loading door with hoist; first-story cornice removed; cargo entrance enclosed; new door; main entry is glazed and panelled door with transom.
39-41		c. 1895	One-story, five-bay brick commercial structure; left section has three windows and door; right has two doors, one window; south elevation has modern garage door; false fronts on both sections with metal strip at top.
43		c. 1885	Three-story, three-bay brick residence flat roof; bracketed cornice; 2/2 sash; segmentally arched windows, stone sills and water table; double, glazed and panelled door with transom; wooden landing; new railing.
45-47		c. 1865	Two attached two-and-one-half-story, three-bay residences; gabled roof; asbestos siding; bracketed cornice; heavy overwindows; 1/1 and 4/1 sash; 45 -- altered entry; double, glazed and panelled doors; 47 -- original overdoor with cornice, architrave and transom.
51-55		c. 1850	Three attached two-and-one-half-story, three-bay brick row houses; gabled roofs; 51 -- bracketed cornice; 53 -- cornice missing; 55 -- cornice aluminum sided; all windows and doors boarded up, eyebrow windows; segmentally arched windows; doors are single.
61		c. 1885	Two-story, two-bay brick residence; flat roof; bracketed cornice and panelled frieze; two-story, three-sided bay is panelled, shingled on second story and brick on first story; 1/1 sash; stone lintels and sills; glazed and panelled door with transom; porch has turned columns, ornate brackets and balusters.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Chambers Street</u>		
67		c. 1950	Large, three-story, two-bay brick commercial building; flat roof; four small windows that are boarded up; modern panelled garage door; good condition.
	71-75	c. 1900, c. 1960	Two-story, multi-bay, brick commercial structure; molded cornice; second-story windows sealed; doors altered; modern glass door; storefront cornice removed; non-contributing.
	77	c. 1870	Two-story, three-bay, brick residence; raised basement; mansard roof with gabled dormers; cornice on facade removed; side cornice is bracketed with panelled frieze; 2/2 and 6/6 windows; radiating voussoirs, stone sills and water table; new porch landing; inner entry retains transom, has new door; outer doors removed; panelling between remains; good condition.
	79	c. 1870	Two-story, three-bay brick residence; raised basement; slate mansard roof with gabled dormers; bracketed cornice and panelled frieze; windows and doors boarded up; double radiating voussoirs; stone sills and water table; new porch landing; good condition.
	81	c. 1870	Two-story, three-bay, brick residence; raised basement; slate mansard roof with gabled dormers; bracketed cornice and panelled frieze; 2/2 windows; double radiating voussoirs; stone sills and water table; landing is new cement; outer doors removed; inner door altered, panelling between remains; good condition.
	87	c. 1870	Two-story, three-bay, brick firehouse (now a commercial structure); gabled roof; bracketed cornice with round windows; second story has round arched windows with labels and sills, second story entry with double, panelled doors and canopy; rectangular brick panels on both stories; two garage door entries with arches; windows on sides are either round or round arched; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Chambers Street</u>		
	89 - 91	c. 1920	One-story, six-bay commercial structure; flat roof; brick; central entry has modern garage doors; two entries and two large windows sealed; quoining; entry with double transom boarded up; good condition.
	93	c. 1870	Two-story, three-bay, brick residence with mansard roof; pressed metal; hooded dormers; bracketed cornice and panelled frieze; 2/2 windows, three-sided bay with recessed brick panels; entry has double door with lintel and transom; double, glazed and panelled doors altered; brick addition to facade; good condition.
	109	c. 1855	One-and-one-half-story, two-bay residence; gabled roof; 6/1 windows; top story covered with asbestos shingles; bottom story covered with new brick; modern glazed and panelled door; good condition.
	111	c. 1890	Three-story, two-bay, brick residence; flat roof; bracketed cornice; stone sills, lintels and water table; 1/1 and 2/2 windows; full-height five-sided bay; entry has enclosed sidelights and transom and new door; good condition.
	115	c. 1890	Two-and-one-half-story, four-bay, brick residence; slate mansard roof; bracketed cornice; three-story, three-sided bay with cornice and denticulated frieze; gabled dormer; 1/1 windows; stone sills and lintels; porch has molded cornice, Tuscan columns, turned balusters; glazed and panelled door; good condition.
	117 - 119	c. 1890	Two-and-one-half-story, six-bay, brick double residence; gabled roof with dormers; two three-story shingled bays; left has a three-sided bay; right has recessed porch; decorative brick sections below; continuous sills; main cornice is bracketed, panelled frieze; columns with foliated capitals, turned balusters; stained glass windows; entrances -- double; double, glazed and panelled doors; good condition.
	121 - 23	c. 1870	Two-and-one-half story, four-bay, brick double residence; multi-gabled roof; square tower with pyramidal roof and pinnacle; panelled frieze; three-sided bay on its second story; entry in tow

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Chambers Street</u> 121-23 (continued)		has transom and sidelights; round-arched dormer with fanlight; paired windows with brick labels and 1/1 sash second-story square bay is panelled; porch has turned spindles, columns, brackets, balusters; good condition.
	125 - 29	c. 1865	Three attached two-and-one-half-story, two-bay row houses; raised basement; asbestos siding; gabled roof; paired brackets; eyebrow windows; 4/4 sash; first story has three-sided bays with panelled friezes; entries have overdoors, pilasters, glazed and panelled doors and new door; good condition.
	131	c. 1855	Two-and-one-half-story, three-bay residence; gabled roof; bracketed cornice; eyebrow windows; aluminum siding; 1/1 windows; door surround has heavy overdoor, pilasters, new door, transom; good condition.
	133	c. 1855	Two-and-one-half-story, three-bay residence; gabled roof; bracketed cornice; aluminum-sided; 1/1 eyebrow windows; entry has pilasters, four-light transoms, sidelights, non-original panelled door; good condition.
	135 - 37	c. 1855	Two-and-one-half-story, six-bay double house; gabled roof; asbestos and aluminum sided; 1/1, 6/6 and eyebrow windows; transom, new doors; shed type hood with bargeboard and brackets; good condition.
	139 - 41	c. 1890	Two-story, three-bay, brick double house; flat roof; bracketed cornice, rope-type trim on frieze; stone sills and lintels and water table; two rounded, two-story bays; 1/1 and 6/6 windows; double glazed and panelled doors with transoms; good condition.
	143	c. 1855	Two-story, three-bay residence; gabled roof; aluminum sided; 6/1 windows (upper sash is old); Greek Revival entry with heavy overdoor, pilasters, panelled door, transom, sidelights; good condition.
	145	c. 1855	Two-story, three-bay residence; gabled roof; aluminum sided; 1/1 windows; plain cornice; Greek Revival entry with heavy overdoor, pilasters, panelled door, transom and sidelights; good condition.
	147 - 49	c. 1855	Two-and-one-half-story, six-bay double house; brick; gabled roof, bracketed cornice; eyebrow and 1/1 windows; stone lintels and sills; altered entrances; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Chambers Street</u>		
151		c. 1865	Two-and-one-half-story, three-bay residence; gabled roof with cross gable; sides are clapboarded and facade is aluminum sided; bargeboard and bracketed cornice; arched gable window; 6/6 windows; portico has pediment, two Tuscan columns, transom; louvred outer door; one-story three-sided bay, good condition.
153		c. 1870	Three-story, three-bay residence; low-pitched gable roof; bracketed cornice and panelled frieze; 6/6 and 6/1 windows (upper sash in latter is original); asbestos siding on sides; aluminum siding on facade; glazed and panelled door with sidelights; good condition.
155		c. 1870	Three-story, three-bay brick residence; flat roof; bracketed cornice and plain frieze; 6/6 windows; stone sills and radiating voussoirs; glazed and panelled door with narrow transom; porch has plain cornice frieze, Tuscan columns, straight balusters; door does not appear original; good condition.
157		c. 1870	Three-story, three-bay residence; flat roof; vinyl siding; bracketed cornice; 1/1 windows; glazed and panelled door; portico has gabled roof with returns, Tuscan columns; good condition.
159		c. 1870	Three-story, three-bay, brick residence; gabled roof; bracketed cornice; denticulated frieze; 2/2 and 6/6 windows; arched brick lintels and stone sills; porch has Tuscan columns, turned balusters; two-sided, one-story bay; double glazed and panelled doors with transom; good condition.
161		c. 1870	Three-story, three-bay brick residence; gabled roof; shingled gabled dormer with leaded glass; bracketed cornice and panelled frieze; windows and door boarded up; arched brick lintels and stone sills; good condition.
163		c. 1870	Two-and-one-half-story, three-bay, brick residence; gabled roof; Gothic-style cross gable with bargeboard and round arched window; arched lintels with drip moldings; door surround has arched lintel, arched transom, double panelled doors; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Chambers Street</u>		
165		c. 1840	Two-and-one-half-story, three-bay residence; gabled roof; eyebrow windows with horizontal brick band underneath; 2/2 windows; stone sills and lintels; entry has lintel, transom, sidelights, glazed and panelled door; good condition.
167		c. 1840	Two-and-one-half-story, three-bay residence; gabled roof; eyebrow windows, windows with horizontal brick band underneath; 6/6 windows; stone lintels and sills; non-original panelled door with sidelights and transom; good condition.
169		c. 1840	Two-and-one-half-story, three-bay residence; gabled roof; eyebrow windows with horizontal brick band beneath; 1/1 windows; stone sills and lintels and water table; glazed and panelled doors; narrow transom; good condition.
171		c. 1840	Two-and-one-half-story, three-bay, brick residence; gabled roof; three-light eyebrow windows with horizontal brick band beneath; 6/6 and 1/1 windows; stone lintels, sills and water table; glazed and panelled door with transom; good condition.
173 - 75		c. 1840	Two-and-one-half-story, six-bay double house of brick; gabled roof; eyebrow windows with horizontal brick bands beneath; stone lintels and sills and water table; windows sealed; panelled door transom and sidelights; stairs altered; good condition.
181			See 144 R South Street
183		c. 1875	Three-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 2/2 and paired 1/1 windows; arched brick lintels, stone sills and water table; entry has arched brick lintel, arched transom, new door; good condition.
185 - 87		c. 1870	Two-and-one-half-story, six-bay double house; gabled roof with polychrome slate; two Gothic-style cross gables with bargeboard, arched window; 4/4 and 6/6 windows; entry has arched lintel, arched transom; glazed and panelled doors; new stairs; good condition.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Chambers Street</u>		
	191 - 197	c. 1860	Four attached two-and-one-half-story, three-bay, brick row house; gabled slate roofs with Gothic-style cross gables; arched lintels, stone sills and water table; some gables retain bargeboard; 4/4, 6/6 sash; new doors and double, glazed and panelled doors; 193 has permastone; good condition.
	199	c. 1890	Three-story, four-bay, brick commercial/residential structure; low-pitched gable roof with aluminum sided cornice; 1/1 windows; arched brick lintels and stone sills; first and second stories altered with new windows and doors; good condition.
	18	c. 1905	One-story, three-bay, brick commercial structure; flat roof with parapet, brick panel beneath; modern panelled garage door; single doorway altered; display window sealed with cinder blocks; good condition.
	30	c. 1890	Three-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 2/2 windows; rock-faced stone lintels and sills; central door, altered window and second door; good condition.
	32	c. 1890	Three-story, three-bay, brick carriage house; flat roof; bracketed cornice and panelled frieze; 12/12 windows, arched brick lintels; second story door with glazed and panelled doors; first story has sealed window, glazed and panelled door; cornice removed; large double carriage doors are panelled, braced batten; good condition.
	34	c. 1855	Two-story, three-bay residence; aluminum-sided; gabled roof; cornice is bracketed; 2/2 windows with heavy overwindows; double door entry is altered, retains over door and transom; landing has straight balusters and corner posts; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Chambers Street</u>		
36		c. 1870	Three-story, three-bay, brick commercial structure; flat roof; bracketed cornice; 4/4 and 6/6 windows with stone sills and lintels; first story has boarded up entry, altered double window; modern door with transom; good condition.
42		c. 1895	One-story, three-bay, commercial structure with stucco sides and permastone facade; bracketed cornice; two single doors; large central entry is boarded up; non-contributing.
44		c. 1870	Three-story, three-bay, brick ecclesiastical structure; flat roof; bracketed cornice and panelled frieze; stone sills and lintels; first story facade is permastone; altered entry and original doorway with denticulated overdoor, fluted panels flanking door, transom and altered door; good condition.
46		c. 1870	Three-story, three-bay, brick commercial structure; flat roof, bracketed cornice and panelled frieze; radiating voussoirs and stone sills; windows boarded up; first story has central, modern garage door; entry has panelled door with transom; good condition.
50 - 52		c. 1865	Two and one half-story, six-bay double house; gable roof, tarpaper and asbestos siding; 2/2 and 6/6 windows; plain cornice and frieze on # 50; bracketed cornice and panelled frieze on # 52; wide shed type dormer; one entry has a shed-type hood, turned spindles, glazed, panelled doors; the other is altered; good condition.
54		c. 1865	Three-story, three-bay, brick residence; flat roof, plain cornice, simple frieze; 2/2 and 1/1 windows; double radiating voussoirs and stone sills; entry and altered central window have elaborate brick lintels; panelled door, but sidelights removed; second entry has stone lintel and new door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Chambers Street</u>		
56		c. 1870	Four-story, three-bay commercial/residential structure; brick, low-pitched gable roof; bracketed cornice and plain frieze; 4/4 windows; double radiating voussoirs and stone sills; storefront missing cornice, retains recessed entry with double, glazed and panelled doors; display window partially enclosed, panelling beneath remains; second storefront - recessed entry and windows boarded up, panelling beneath windows remains; good condition.
58 - 66		c. 1890	Three-story, thirteen-bay, brick industrial building; low-pitched gabled roof; bracketed cornice and panelled frieze; multi-paned windows, many boarded up; some have radiating voussoirs, all have stone sills; south elevation's plaque says "1876", facade has two panelled modern gargae door, and two single doorways with modern doors; good condition.
68		c. 1905	One-story, three-bay brick garage; flat roof with parapet; modern panelled garage doors; non-contributing
79		c. 1950	One-story, three-bay, brick garage; flat roof with metal strip at top; modern panelled garage doors; non-contributing
72		c. 1950	One-story, three-bay, brick garage; solid and glazed and panelled garage doors; non-contributing.
132 - 134		c. 1870	Three-story, four-bay brick double residence; low-pitched gable roof; bracketed and decorative frieze; 2/2 sash; stone lintels, sills, water table; two central, two-story, three-sided bays with similar entablatures; glazed and panelled doors with transoms.
136		c. 1890	Two-and-one-half-story, three-bay residence; stuccoed; gabled roof with dormers; molded cornice, 1/1 windows; stone lintels and sills; second story door indicates altered porch; glazed and panelled main entry; full-height, three-sided bay; good condition.
138		c. 1890	Two-and-one-half-story, three-bay residence; clapboarded; gabled roof with dormers; molded cornice; 1/2 windows; one-story, three-sided bays; pedimented, classical porch; Doric columns and turned balusters; glazed and panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Chambers Street</u>		
140		c. 1885	Two-and-one-half-story, two-bay residence; aluminum sided; gabled roof with gabled projection at left facade; single and double 1/1 windows; glazed 7 panelled door; semi-circular, classical portico with Doric columns on stone railing; good condition.
142		c. 1885	Two-and-one-half-story, two-bay residence; clapboarded second story, stone first story; gabled roof with gable projection at left of facade; molded cornice; 1/1 windows; three-sided bay; classical porch with Doric columns and turned balusters; glazed and panelled door; good condition.
162		c. 1870	Three-story, three-bay, brick residence; low-pitched gable roof; bold cornice and bracketed frieze; two-tier radiating voussoirs and stone sills; 6/6 windows; glazed and panelled door; porch has classical entablature, turned columns and balusters; good condition.
168 - 174		c. 1860	Four attached three-story, three-bay residences; gabled roof; molded cornice; segmentally arched windows with stone sills; 6/6 sash; panelled doors with arched transoms; good condition.
182			See 142 R South Street.
184 - 186		c. 1865	Two-story, six-bay double house; gabled roof with cross gables; left side is aluminum sided; right is stone faced; 4/4, 2/2 and 1/1 windows; glazed and panelled door with sidelights and transom; other with hood boarded up; good condition.
188 - 190		c. 1870	Three-story, six-bay, brick double house; flat roof; plain cornice and frieze; 2/2 windows with radiating voussoirs and stone sills; central entries are arched with transoms and glazed and panelled doors; good condition.
194		c. 1870	Three-story, three-bay, brick residence; flat roof; molded cornice and bracketed frieze; radiating voussoirs, stone sills and 6/6 windows; entry has transom and glazed panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Chambers Street</u>		
	200	c. 1870	Three-story, five-bay, brick residence; flat roof; boldly molded cornice and bracketed frieze; arched lintels; stone sills; 2/2 windows; arched entry with deeply recessed transom and glazed and panelled door; good condition.
	<u>City Terrace</u>		
	5	c. 1875	Three-story, four-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 2/2 windows, arched brick lintels, and stone sills; double, glazed and panelled doors; arched transom; good condition.
	7	c. 1875	Three-story, four-bay, brick commercial/residential structure; flat roof; bracketed cornice; 4/1 and 1/1 windows; stone sills and lintels; storefront and cornice removed; display windows boarded up; main entrance is altered; good condition.
	9	c. 1875	Three-story, three-bay, brick commercial/residential structure; flat roof; bracketed cornice; 1/1 and 1/6 windows; stone sills and lintels; storefront: cornice removed, altered and boarded up; entry is altered; good condition.
	15	c. 1890	Two-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; rock-face stone sills, lintels and water table; two-story, square bay at left; porch has bracketed cornice, turned spindles and columns, straight balusters; modern stair rail; good condition.
	17	c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; rock-faced stone sills, lintels and water table; two-story, round bay at left; 1/1 windows; double, glazed and panelled door with transom; porch has bracketed cornice, turned spindles, columns, straight balusters; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>City Terrace</u>		
	17 R (on Van Ness Street)	c. 1905	One-story, one-bay garage; rock-faced cinder block; flat roof with stepped parapet; panelled garage door, non-contributing
	23	c. 1890	Two-story, two-bay brick residence; flat roof with cement band at top and horizontal decorative brickwork; double 1/1 windows on left projection; recessed entry has glazed and panelled door; two-story porch is enclosed on second story; first story has square posts and straight balusters; good condition.
	25	c. 1865	Three-story, three-bay residence with gabled roof; cornice bracketed; top two stories are asbestos sided; first story is brick; 1/1 windows; modern door; good condition.
	27	c. 1865	Three-story, three-bay residence; gabled roof and bracketed cornice; clapboarded on top two stories, brick on first story; 1/1 windows; double, glazed and panelled doors; good condition.
	29 R	c. 1855	Two-story, four-bay garage; brick; flat roof with molded cornice; glazed and panelled door; fair condition.
	31	c. 1855	Two-story, three-bay, brick residence; flat roof; simple bracketed cornice and frieze; 1/1 windows with radiating voussoirs and stone sills; glazed and panelled door with wooden hood above; additional bay at left and rear; good condition.
	33	c. 1855	Three-story, three-bay, brick residence; gabled roof; cornice bracketed; 6/1 windows; stone sills and lintels; between two doors is sixteen-pane window; one doorway boarded up, the other has a modern door and enclosed transom; good condition.
	35	c. 1855	Two-story, three-bay brick residence; flat roof and bracketed cornice; double 1/1 and 2/2 windows; arched brick lintels and stone sills; single glass panelled door with transom; old batten wooden door and transom; good condition.
	37	c. 1905	One-story, two-bay garage; stucco; hipped roof; braced batten and glazed garage doors; good condition. non-contributing

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>City Terrace</u>		
39		c. 1885	Two-and-one-half-story, three-bay clapboarded residence; gabled roof; shingled gable end has bargeboard trim; 2/2 and 1/1 windows; porch has screen, turned columns, altered base; recessed entry with glazed and panelled door; good condition.
41 - 43		c. 1905	Two-story, four-bay commercial structure; facade is brick and sides are mostly cinder block with some brick; flat roof with peaked parapet and stuccoed panel near top; large multi-paned windows and paired 6/6 windows; stone sills and lintels; modern garage door and two entries; one is original, second has been cut into bricked in garage bay; good condition.
45		c. 1855	Two-story, three-bay brick residence; flat roof; bracketed cornice; 6/1 windows; arched brick lintels and stone sills; modern wood door; arched transom; good condition.
49		c. 1900	Two-story, three-bay clapboarded carriage house; flat roof; novelty siding on facade and vertical boards on sides; bracketed cornice; numerous windows on side; panelled garage doors, boarded up window; glazed and panelled entry door; good condition.
51		c. 1855	Three-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 windows, arched brick lintels; entry has transom and sidelights removed, glazed and panelled door; large window with small panes of glass; good condition.
57		c. 1850	Two-story, five-bay residence; gable roof; asbestos siding; 6/1 and 1/1 windows; corner storefront is enclosed, panelling underneath remains; entry has new door; good condition.
57 R (on First St.)		c. 1905	One-story, two-bay, cinderblock garage; gable roof; good condition. non-contributing

EAST END [ HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>City Terrace</u>		
	79 - 81	c. 1890	Three-story, six-bay, brick double house; flat roof; bracketed cornice and panelled frieze; 2/2, 1/1 windows; stone sills and lintels; one entry has panelled door with transom and sidelights removed; , while other door is not visible, but transom and sidelights are; good condition.
	85	c. 1890	Two-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels and water table; two-story, round bay at left; double, glazed and panelled doors with transom; stone basement; stairs are stone with modern rail; good condition.
	87	c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels and water table; two-story, round bay at left; basement and stairs are stone; double, glazed and panelled doors with transom; good condition.
	89	c. 1890	Two-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels and water table; two-story, round bay at left; stone basement and stairs; double, glazed and panelled doors with transom; good condition.
	91	c. 1890	Two-story, two-bay, brick residence; flat roof; 1/1 windows; stone sills, lintels and water table; bracketed cornice and panelled frieze; two-story, round bay at left; stone stairs and basement; double, glazed and panelled doors; good condition.
	93	c. 1910	Two-and-one-half-story, two-bay residence; hipped roof with gabled dormer; asbestos siding; triple and paired 1/1 and also leaded glass windows; glazed and panelled doors; porch has flared posts, straight balusters, lattice, simple cornice, plain frieze; good condition.
	8	c. 1900	One-story, two-bay commercial structure; brick and clapboarding; flat roof, altered display window; panelled door with transom; good condition.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>City Terrace</u>		
10		c. 1890	Three-story, five-bay residence; flat roof; bracketed cornice and panelled frieze; asbestos siding; 1/1 windows; new doors; good condition.
12		c. 1855	Three-story, three-bay residence; flat roof; bracketed cornice and panelled frieze; 2/2 windows; asbestos siding; entry retains transom but double doors altered; good condition.
14		c. 1885	Three-story, three-bay brick residence; flat roof; bracketed cornice; 2/2 windows; arched brick lintels and stone sills; arched transom, modern wood door; good condition.
16		c. 1905	One-story, three-bay, brick commercial structure; sides are rock-faced cinder block; flat roof with parapet and cement decorated panels set in brick; storefront altered; retains brick lintel; has two plate glass windows and a glazed and panelled door; good condition.
18		c. 1875	Three-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 and 2/2 windows; arched brick lintels and stone sills; double, glazed and panelled doors with wide transom; first story cornice removed; good condition.
22		c. 1855	Three-story, three-bay residence; tarpaper siding; gabled roof with clapboarded ends; bracketed cornice and panelled frieze; 1/1 windows; panelled door; good condition.
24 - 32		c. 1885	Five attached two-story, two-bay, brick row houses with raised basement and flat roof; bracketed cornice and panelled frieze; five full-height, five-sided bays; 1/1 and 2/2 sash; windows with arched lintels and stone sills; double glazed and panelled doors with arched transoms; stone water table and stairs #32 has decorative brickwork under the windows.
34		c. 1865	Two-story, three-bay, brick residence; low-pitched gable roof; cornice is bracketed; 2/2 windows; arched brick lintels and stone sills; entrance has narrow arched transom and glazed and panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>City Terrace</u>		
36		c. 1905	One-story, two-bay brick garage; flat roof with exposed rafters; modern garage door and altered original wooden door; good condition.
38		c. 1895	Residence converted from carriage house; tarpaper and aluminum siding; cornice is bracketed; double 6/6 windows; panelled and glazed, panelled doors; good condition.
40		c. 1895	One-story, one-bay, brick carriage house; flat roof; plain cornice; two large braced batten garage doors.
44		c. 1895; 1970	One-story, commercial structure; new pseudo-mansard roof; windows have been boarded up; two entrances; brick; asbestos siding and vertical boarding; good condition.
48		c. 1905	One-story, two-bay garage, stucco; flat roof with parapet; modern glazed and panelled garage doors; good condition.
50		c. 1890	Two-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; rock-faced stone sills and lintels; two-story, round bay at left with rectangular terra cotta panels; entry has transom and glazed and panelled door; good condition.
52		c. 1865	Two-story, three-bay, brick residence; low-pitched gable roof; plain cornice and frieze; 1/1 windows; arched and straight brick lintels, stone sills and brick water table; modern, glazed and panelled door; new brick stairs; good condition.
78 -80		c. 1890	Two-story, five-bay residence; asbestos siding; bracketed cornice and panelled frieze; 1/1 windows; single and double doors with oval glass panels; porch has denticulated cornice; Tuscan columns on panelled piers, solid railing; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>City Terrace</u>		
	84	c. 1890	Two-story, two-bay brick residence; flat roof; bracketed cornice; frieze with sunburst panels; 1/1 and 2/2 sash; stone sills, lintels; full height, five-sided bay; double, panelled door; transom; porch, cornice frieze and turned members; good condition.
	90	c. 1890	Two-story, two-bay residence; low-pitched gable roof; tarpaper siding; bracketed cornice; rope-type trim on frieze; flared, five-sided bay; entry has canopy, bracketed cornice, barge-board, glazed and panelled doors with transom; non-contributing garage.
	92		See 297 R Third Street.
	<u>Clark Street</u>		
	9	c. 1880	Two-story, three-bay brick residence; flat roof; wooden bracketed cornice; stone lintels and sills; 2/2 sash; replacement porch and entry doors; raised basement.
	13	c. 1880	Three-story, two bay brick residence; flat roof; wooden bracketed cornice; three-story rounded three windowed bay; stone lintels and sills; 1/1 sash three-story porch at entrance; first story -- open with columns, replacement brick bases; second story -- enclosed with fenestration; third story--open with wrought iron rail.
	15-17	c. 1880	Two-story, six-bay brick double house; low-pitched gable roof; bracketed cornice and decorative frieze; 1/1 sash; glazed and panelled doors; transom; stone water table and raised basement; wood stairs with square balusters; good condition.
	19	c. 1855	Two-and-one-half-story, three-bay residence; asbestos siding; gabled roof; molded cornice; 1/1 sash; molded overwindows; porch -- classic entablature; square posts; solid railing; glazed and panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Clark Street</u>		
23		c. 1885	Two-story, three-bay brick residence; low-pitched gable roof; bracketed cornice, panelled frieze; 2/2 sash; stone lintels and sills; double, glazed and panelled doors; bracketed porch with turned members; good condition.
25		c. 1885	Two-and-one-half-story, three-bay brick residence with raised basement; gabled roof; bracketed cornice, panelled frieze; 2/2 sash; stone lintels and sills; double, glazed and panelled doors; bracketed porch with turned members; good condition.
27		c. 1885	Three-story, two-bay brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 and 2/2 sash; stone lintels and sills; panelled door full-height, three-sided bay at right; good condition.
29		c. 1885	Three-story, five-bay brick residence; low-pitched gable roof; bracketed cornice; decorative freize; 1/1 and 2/2 sash; segmentally arched windows with two tiers of brick; stone sills; panelled doors with transoms; side-lights; left two-bay section recessed; good condition.
31-33		c. 1865	Two-and-one-half-story double house; gabled roof with dormer; modern siding; bracketed cornice; 1/1 sash; panelled door with transom; modern porticoes; good condition.
45		c. 1910	Brick industrial building attached to 175 Washington St.
95			See 167 R South William Street.
97		c. 1885	Two-story, three-bay residence of brick; flat roof; bracketed cornice and panelled frieze; 2/2 sash; segmentally arched windows with stone sills; first story facade has coursed stucco; entry is below ground level with panelled door and transom; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Clark Street</u>		
99			See 80 R Benkard Street
117		c. 1885	Two-story, four-bay brick commercial structure; flat roof; bracketed cornice and panelled frieze; 6/6 sash; loading door on second story; entry is altered; first-story cornice; modern garage door and entry; transom and display window altered; paneling below intact; good condition.
119		c. 1885	Two-story, three-bay brick residence; flared slate mansard roof; similar dormers; windows with multi-pane glass in upper sash; bracketed cornice; second story has arched windows; three-sided bay with panelling and stained glass windows; first story has double, glazed and panelled door and transom; hood with slate roof and brackets; and multi-paned triple window; good condition.
121			See 172 R Renwick Street
137			See 169 R Renwick Street
4		c. 1950	Two-story, two-bay brick commercial building; stone-capped parapet at roof line; non-contributing
6		c. 1950	Two-story, brick commercial building; overhead door at street level; non-contributing.
8		c. 1880	Three-story, three-bay frame residence; flat roof; wooden bracketed cornice; fire damaged
10		c. 1880	Three-story, two-bay brick residence; flat roof; wooden bracketed cornice; Three-story, three-sided bay; stone lintels and sills; 1/1 and 2/2 sash; original entrance; aluminum awning; fire escape on facade.
12		c. 1880	Three-story, three-bay frame residence aluminum siding; flat roof; wooden bracketed cornice; 1/1 sash

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Clark Street</u>		
16		c. 1880	Two-and-one-half-story, three-bay brick residence; mansard roof with pedimented dormers; 1/1 sash; stone lintels and sills; bracketed porch with turned members and decorative balustrade; double, glazed and panelled doors with transom above; very good condition.
52		c. 1900	One-story, 11-bay, brick commercial structure; flat roof; panelled garage doors; and boarded up windows; good condition.
58		c. 1865	Two-story, three-bay brick residence with raised basement; molded cornice; 1/1 sash; segmentally arched windows with two-tiers of brick; panelled door with sidelights; modern portico; good condition.
60		c. 1865	Two-story, three-bay brick residence with raised basement; low-pitched gabled roof; molded cornice; 1/1 and 6/1 sash; segmentally arched windows; panelled door with sidelights; new stairs; good condition.
62		c. 1865	Two-story, three-bay brick residence; raised basement; low-pitched gabled roof; molded cornice; 6/1 sash; straight brick lintels; glazed and panelled door; new stairs; good condition.
92		c. 1905	One-story, two-bay garage; flat roof; cinder block; modern, panelled garage doors and vertical board, braced door with windows; good condition; non-contributing.
94-96		c. 1905	One-story, six-bay garage; flat roof; cinder block; modern panelled garage doors and vertical board, braced door with windows; good condition; non-contributing.
98		c. 1905	One-story, three-bay garage of cinder block; flat roof; braced vertical board doors, glazed; good condition; non-contributing.

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Clark Street</u>		
100		c. 1905	One-story, one-bay cinder block garage gabled roof with clapboarded gable end; braced vertical board doors; non-contributing.
116		c. 1885	See 174 R Renwick Street
134-140			Four attached three-story, two-bay rowhouses of brick; flat roof; bracketed cornice and panelled frieze; 1/1 and 2/2 sash; segmentally arched windows with two tiers of brick; stone sills; three-story, three-sided bays on left, entries on right with narrow transoms (some altered); altered doors and porticoes; good condition.
	<u>Clinton Street</u>		
71		c. 1905	Large, two-and-one-half-story, five-bay brick residence; gabled roof with cross gables having clapboarded ends; gabled dormers; 1/1 windows; classical entablature and porch with Ionic columns and turned balusters; square bays with multi-windows and inverted roofs; decorative chimney, stone foundation; very good condition.
73		c. 1895	Two-story, two-bay brick carriage house; vertical-board door and modern garage door; loading door and round windows on second story; good condition.
107-109		c. 1880	Two-story, six-bay brick double house; low-pitched gable roof; bracketed cornice and decorative frieze; 2/2 sash; segmentally arched windows with brick sills; panelled and new doors; arched transoms; good condition.
58		c. 1905	Two-and-one-half-story, three-bay brick residence; gabled roof; stuccoed gable end with vertical "timbers" plain cornice and frieze; 6/1 and 2/2 sash; stone lintels and sills; single porch with Doric columns and solid, shingled balustrade; double, glazed door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Clinton Street</u>		
62		c. 1840	One-and-one-half-story, four-bay clapboarded residence; low-hipped hipped roof with deep eaves; eyebrow and arched, French windows; 6/6 sash; panelled door with transom above; new portico; good condition.
70		c. 1845, c. 1875	Two-story, three-bay clapboarded residence with mansard roof; hooded dormers; bracketed cornice; 1/1 sash; classical door surround with panelled door; sidelights and transom; bracketed side porch; good condition.
80		c. 1865	Two-story, three-bay brick residence; low-pitched gable roof; molded cornice 1/1 sash; brick lintels and sills; glazed and panelled door; shed-type hood with trefoil cutouts and drops; good condition.
82		c. 1845	Three-story, three-bay, clapboarded residence; low-pitched gable roof; bracketed cornice and panelled frieze; 2/2 sash; glazed and panelled door with sidelights; decorative shed-type hood; good condition; non-contributing garage.
86		c. 1849	Two-story, three-bay brick educational building; gabled roof; molded cornice; 12/12 sash; panelled door; classical portico with pediment and Doric columns on brick piers; good condition.
88		c. 1865	Three-story, three-bay brick residence low-pitched gabled roof; bracketed cornice; 1/1 sash; segmentally arched windows with two-tiered bricks; stone sills; panelled door with sidelights and arched transom; good condition.
112		c. 1880	Two-story, three-bay residence; aluminum siding; flat roof; bracketed cornice and panelled frieze; 2/2 sash; panelled door with transom; decorative door hood with sunburst designs; good condition.
114		c. 1880	Two-story, three-bay residence with raised basement; clapboarded; flat roof; bracketed cornice and decorative frieze; 2/2 windows; porch has plain cornice and frieze and turned members panelled door with transom; good condition.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Colden Street</u>		
	1-5	c. 1878	Two-and-one-half-story, six-bay brick factory building; gabled roof; multi-windows; good condition.
	11-13	c. 1878	Two-story, four-bay brick factory building; low-pitched gable roof; multi-windows; modern addition; good condition.
	80-98	c. 1880	Large, two-and-one-half-story, fourteen-bay brick commercial structure; gabled roof; second story has triple sash windows, while first story has double sash; large wooden loading door with shed roofs; basement in rear; good condition.
		c. 1855	One-and-one-half-story, three-bay residence; clapboarded; gabled roof; eyebrow windows; 6/6 sash; panelled door with shed-type hood; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Concord</u>		
	<u>Courtney Avenue</u>		
	9		See 10 R Bayview Terrace.
11		c. 1890	Two-and-one-half-story, three-bay, clapboarded residence; multi-gabled slate roof; shingled facade gable with panelling; single and tripartite windows; shingles between first and second stories; classical porch with Doric columns on solid balustrade; good condition.
15		c. 1890	Two-story, three-bay residence; aluminum-siding; irregular slate roof; porch has bracketed cornice and Tuscan columns on solid balustrade; glazed and panelled door; new 1/1 windows; one-story, three-sided bay and similar two-story bay on east elevation; good condition.
17 - 19		c. 1890	Two-story, four-bay, brick double house; flat roof; bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two two-story, rounded bays; double, glazed and panelled doors with transoms; porches have denticulated frieze; Tuscan or turned columns, solid balustrade or balusters; good condition.
21		c. 1890	Two-story, three-bay residence; asbestos siding; 1/1 windows; irregular roofline; gabled dormer; tower with flared pyramidal roof; glazed and panelled door; small porch with turned spindles, columns and solid balustrade; east elevation has a bay with flared second story; good condition.
25		c. 1890	Two-story, two-bay residence; shingles and aluminum siding; multi-gabled roof; flared second story is shingled; first story has three-sided bay with decorative brackets; porch altered: square flared posts on brick piers, solid balustrade; glazed and panelled door; west elevation shingled gable has fan-

EAST END I HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Courtney Avenue</u> 25 (continued)		light and decorative woodwork in sunburst pattern; good condition.
29		c. 1890	Two-story, three-bay residence; shingled, flared second story, clapboarded first story; bracketed cornice and panelled frieze; multi-gabled roof; decorative gable on facade; 1/1 windows, small panes on periphery of upper sash in some; bevelled overhang with brackets and pendant; bracketed porch has Tuscan columns on stone piers, straight balusters; glazed and panelled door; good condition.
31			See 52 R South Liberty Street.
45			See 49 R South Liberty Street.
47		c. 1890	Two-and-one-half-story, three-bay residence; asbestos siding; multi-gabled roof with pediment; new 1/1 windows; one-story bay on right side; encircling porch with turned spindles and balusters, brackets and solid balustrade; good condition.
49		c. 1890	Two-and-one-half-story, two-bay residence; tarpaper siding; cross gabled roof with pediments; new 1/1 windows; three-sided porch enclosed; good condition.
51		c. 1890	Two-and-one-half-story, three-bay residence; clapboarded; cross gabled roof with shingled gable ends; 1/1 windows; right corner on first story is bevelled with decorative brackets and pendant at overhang; porch enclosed; good condition.
53		c. 1890	Two-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; glazed and panelled door; porch with classical entablature and turned members, cutwork, brackets; two-story, round bay; good condition.
55		c. 1890	Two-story, two-bay brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two-story, rounded bay; double, glazed and panelled doors with transom; porch altered; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Courtney Avenue</u> 57	c. 1890	One-story, two-bay garage; clapboarded; hipped roof; new glazed and panelled garage doors; good condition; contributing.
	59 - 61	c. 1890	Two-story, four-bay, brick double house; flat roof; bracketed cornice; denticulated frieze and architrave; two-story, rounded bay on either side; 1/1 windows; rock-faced stone sills and lintels; panelled doors; plain, altered porch with square posts and solid railing; good condition.
	63	c. 1890	Two-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; two-story, rounded bay; 1/1 windows; stone sills and lintels; entry and porch altered; good condition.
	65	c. 1900	Two-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two-story, three-sided bay; entrance is altered; retains transom; porch removed; good condition
	67	c. 1905	Two-story, two-bay residence; flat roof; rock-faced cinder blocks; plain cornice, simple frieze and architrave; 1/1 windows; rounded bay on second story; double, glazed and panelled doors with transom; porch of rock-faced cinder blocks has plain cornice and frieze; good condition.
	71 - 73	c. 1900	Two attached 3-story, 2-bay brick residences; flat roof; bracketed cornice and panelled frieze; 1/1 sash; brick lintels and stone sills; decorative brick work; retains first story storefront cornice; first story bricked; east elevation: two-story bay on top two stories; bracketed cornice.
	75	c. 1890	Two-story, three-bay residence with flat roof; bracketed cornice, frieze and architrave; 2/2 windows; entry altered; porch has openwork frieze; turned columns and sided-railing; good condition.
	77 - 79	c. 1900	Two-story, four-bay, brick double house; flat roof; bracketed cornice and panelled frieze; 1/1 windows, stone sills and lintels; two two-story rounded bays; continuous lintels and sills; double, glazed and panelled doors with transoms; porch has straight or turned spindles, turned columns, straight balusters; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Courtney Avenue</u>		
81		c. 1890	Two-story, three-bay residence; tarpaper siding; flat roof; bracketed cornice and panelled frieze; 1/1 windows; glazed and panelled door with transom; porch has lattice-like cutwork at top, turned columns, solid balusters; good condition.
91 Rear		c. 1920	One-story, one-bay garage; clapboarded; pyramidal roof; one large, double door: glazed and panelled; good condition. nc-g
91		c. 1890	Two-and-one-half-story, two-bay residence; asbestos siding; gabled roof; large gabled bay with fanlight in pediment and three-sided bay; corner porch enclosed with glass; entry to right has sidelights; 1/1 windows; east elevation has bay on first story; good condition.
93		c. 1890	Two-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two-story rounded bay with continuous sills and lintels; double doors with transom; also new doors and portico; good condition.
93 Rear		c. 1910	One-story, two-bay garage; clapboarded; gabled roof; glazed and panelled doors; good condition. nc-g
97		c. 1890	Two-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; three-sided, two-story bay; entry with transom, new door; portico retains original roof with modern supports; good condition.
99		c. 1890	Two and one-half story, three-bay residence; asbestos siding; gable roof with returns; bracketed cornice and panelled frieze; 1/1 windows; new door and canopy; good condition.
99 Rear		c. 1910	One-story, two-bay garage; novelty siding; gabled roof; glazed and panelled doors; good condition. nc-g
105		c. 1910	One-and-one-half-story, three-bay bungalow; shingled; gabled roof with exposed rafters and wide gabled dormer; 2/2/ windows; glazed and panelled door with sidelights; Tuscan pilasters; sunporch; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Courtney Avenue</u>		
	105 Rear (on Monument)	c. 1910	One-story, two-bay garage; cinder block; smooth and rock-faced; panelled garage doors; good condition. nc-g
8			See 9 R Bayview Terrace.
10 - 12		c. 1890	Two-and-one-half-story, six-bay, double house; brick; mansard roof with gabled dormers; two square gabled bays; 1/1 windows; rock-faced stone sills and lintels; double, glazed and panelled doors; porch has denticulated cornice, round columns atop brick balustrade; good condition.
16		c. 1890	Two-story, three-bay residence; clapboarded; multi-gabled with bargeboard; left section projects; 1/1 windows; glazed and panelled vestibule at entrance; porch has Tuscan columns, straight balusters, plain cornice and frieze; good condition.
20		c. 1890	Two-story, three-bay residence; clapboarded first story and shingled second story; irregular gable and gambrel roof; gable with half-timbering; windows have small panes on periphery of upper sash; shingled dormer; porch has lattice at top, turned columns, straight balusters; glazed and panelled door; small, double, multi-paned window; east elevation has half timbering with shingles; good condition.
22 - 24		c. 1890	Two-story, four-bay, brick double house; flat roof; bracketed cornice and panelled frieze; two two-story, three-sided bays; 1/1 windows; stone sills and lintels; porch retains crest rail; rest is altered; double, glazed and panelled doors; transoms; good condition.
26 - 28		c. 1890	Two-story, four-bay, brick double house; flat roof, bracketed cornice and panelled frieze; 1/1 windows, rock-faced stone sills and lintels; two-story, three-sided bays with decorative brick panels; porch has denticulated cornice and turned members; double, glazed and panelled doors; good condition.
44			See 47 R South Liberty Street.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Courtney Avenue</u> 46 - 48	c. 1890	Three-story, four-bay, brick double house; flat roof; bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two three-story, three-sided bays on either side; 48 has double, glazed and panelled doors with transom, altered porch; # 46 has altered entry, porch with turned members, fan-type brackets and panelling; good condition.
	50 - 52	c. 1890	Two-story, four-bay, brick double house; flat roof; bracketed cornice and panelled frieze; two-story, three-sided bays on either side with decorative brick panels; 1/1 windows; stone sills and lintels; separate porches - turned members and altered; one altered entry and one set glazed and panelled doors with transom; good condition.
	54	c. 1890	Two-story, two-bay, brick double house; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two-story, three-sided bay; porch has turned spindles and columns and straight balusters; double, glazed and panelled doors; good condition.
	56	c. 1890	Two-and-one-half-story, three-bay residence; asbestos siding; multi-gables with pediments; corner tower on top two stories; pyramidal roof; decorative porch on top story has turned members; one-story bay on second story; double, glazed and panelled doors; main porch has turned members and arched spans between columns; east elevation has quarter-round windows; good condition.
	58	c. 1890	Two-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; two-story, rounded bay; 1/1 windows; continuous rock-faced sills and lintels; double, glazed and panelled doors; stone basement and steps; good condition.
	62	c. 1905	Two-and-one-half-story, three-bay shingled residence; gabled roof with cross gable; 1/1, single and double and tripartite windows; second story glazed porch; main porch has Doric columns atop solid balustrade; one-story bay on first story; large window to left of panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Courtney Avenue</u>		
	66	c. 1890	Two-and-one-half-story, two-bay residence; asbestos siding; multi-gabled roof; front one has projecting, bracketed pediment and panelling; two-story, square bay; double door in entry altered; retains transom; porch has square posts, brackets; turned spindles; good condition.
	68 - 70	c. 1890	Three-story, six-bay double house; tarpaper siding; flat roof; bracketed cornice and panelled frieze; 1/1 windows; # 70 has altered entry and porch, retains transom; # 68 has double, glazed and panelled doors; porch with denticulated cornice and Tuscan columns; good condition.
	74	c. 1890	Three-story, four-bay, brick commercial/residential structure; flat roof; bracketed cornice and panelled frieze; 1/1 windows; remnants of first story cornice; storefront completely enclosed with wood; east elevation has two-story bay on top two stories; bracketed cornice; entry with transom and sidelights; good condition.
	74 Rear (on South Lander)	c. 1900	One-story, three-bay garage with flat roof; clapboarded and novelty siding; right section is double clapboard garage; left section is novelty sided single garage; garage doors are corrugated metal; good condition.
	76	c. 1890	Two-story, four-bay, brick commercial/residential structure; flat roof; bracketed cornice and panelled frieze; second story bay with shingled base; 1/1 windows; bracketed cornice across first story; storefront bricked in and altered; at right is panelled door; good condition.
	78	c. 1890	Two-story, three-bay residence with low-pitched gable roof; vinyl siding; cornice is aluminum sided with aluminum brackets; 2/2 windows; enclosed porch; good condition.
	80	c. 1890	One-story, two-bay clapboarded garage; pyramidal roof; lean-to addition makes it double; panelled doors; good condition. c-g
	82 - 84	c. 1890	Two-story, six-bay residence with low-pitched gable roof; 2/2 windows; double, glazed and panelled doors; # 82 has vinyl siding, aluminum sided cornice, porch with plain cornice, turned columns and solid railing;



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	Courtney Avenue 82 - 84 (cont'd.)		# 84 has aluminum siding; bracketed cornice, no porch; good condition.
86		c. 1890	Two-and-one-half-story, three-bay residence; multi-gabled roof, round-arched gabled windows; second and third stories have aluminum siding; first is stuccoed; 2/2 windows; double, glazed and panelled door with transom altered porch. good condition.
88		c. 1890	Two-story, three-bay residence; brick with aluminum siding; flat roof; boxed cornice; 2/2 windows; second-story bay; 1/1 windows; glazed and panelled door; porch has square posts, brick balustrade; good condition.
90		c. 1890	Two-story, three-bay residence; tarpaper siding; flat roof, cornice aluminum sided; 1/1 windows; glazed and panelled door; porch has plain cornice, turned members; good condition.
92		c. 1890	Two-and-one-half-story, three-bay residence; asbestos siding; gabled roof, 1/1 and 2/2 windows; glazed and panelled door; porch has plain cornice, straight columns and solid balustrade; good condition.
94		c. 1905	Two-story, four-bay, residence; asbestos siding; low-pitched gable roof; bracketed cornice; 1/1 windows; porch: plain cornice, Tuscan columns and solid balustrade; good condition.
94 Rear		c. 1905	One-story, two-bay gargae, rock-faced cement blocks; flat roof; good condition. nc-g
100		c. 1890	Three-story, three-bay residence; flat roof; cornice is aluminum sided with aluminum brackets; 6/1 windows; porch has plain cornice, straight columns, balusters; glazed and panelled door; good condition.
100 Rear		c. 1905	One-story, three-bay garage; flat roof; cinder block; good condition; non-contributing.
104		c. 1890	Two-story, three-bay residence; asbestos siding, new 1/1 windows; low-pitched gable roof; bracketed cornice and panelled frieze; brick-enclosed portico; good condition.
106		c. 1890	Two-story, two-bay, brick residence; flat roof; panelled frieze; bracketed cornice; 1/1 windows; stone sills and lintels; two-story, rounded bay; double, glazed and panelled door with transom; porch retains turned spindles, new straight columns; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>DuBois Street</u>		
	7	c. 1905	Two-story, three-bay, brick residence; flat roof; bracketed cornice; three-sided bay on second story, panelled and tarpaper shingles; glazed and panelled door flanked by paired windows; 1/1 windows; porch has flared posts on rough stone balustrade; good condition.
	11	c. 1885	Three-story, three-bay, brick residence; full basement; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills and lintels and water table; modern, double, glazed and panelled door; transom; good condition.
	13 - 15	c. 1870	Two-and-one-half-story, six-bay, double house, brick; polychrome, slate mansard roof; hooded dormer with panelling and brackets; bracketed cornice and panelled frieze; 2/2 windows, arched brick lintels with keystones; stone sills and water table; # 13 has a hood with mansard roof, spindles and brackets; # 15 has porch with Tuscan columns on brick balustrade; glazed and panelled doors with transoms; good condition.
	17	c. 1870	Three-story, three-bay brick residence, low-pitched roof with parapet; 1/1 windows, stone sills and lintels; porch has flared posts on shingled balustrade; good condition.
	17 Rear (on Van Ness Street)	c. 1905	One-story, two-bay garage; rock-faced cinder block; flat roof; panelled garage door; non-contributing.
	23	c. 1890	Three-story, two-bay, brick residence; flat roof; panelled frieze; 1/1 windows; continuous stone sills and lintels; five-sided three-story bay; glazed and panelled, double doors; porch has crest rail and turned spindles, columns and balusters; good condition.
	25	c. 1870	Two-and-one-half-story, three-bay residence; brick; mansard roof with patterned polychrome slate; hooded dormers; bracketed cornice and panelled frieze; 2/2 windows; arched lintels and stone sills; porch has straight posts, solid railing, turned balusters on stairs; double, glazed and panelled doors with transom; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>DuBois Street</u>		
	27 - 29	c. 1870	Two attached 2½-story, 3-bay brick residences; mansard roof with hooded dormers; bracketed cornice; 2/2 sash; arched stone lintels with keystones; stone sills; decorative brickwork and brick pilasters; glazed and panelled doors; transoms; #27 has porch with denticulated cornice and turned members; #29 has stair landing with turned balusters and straight wood railing on steps; good condition.
31		c. 1885	Three-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; five-sided bay with polygonal roof; decorative terra cotta panels; 1/1 windows; continuous stone sills and lintels; glazed and panelled doors; smooth stone water table; porch has pediment, turned spindles and columns, straight balusters; good condition.
33		c. 1885	Two-story, three-bay brick residence; raised basement; flat roof; bracketed cornice and panelled frieze; 2/2 windows, stone sills and lintels; recessed entry with two-story porch: turned spindles, columns, balusters with brackets; double, glazed and panelled doors with stained glass; good condition.
35		c. 1855	Two-story, three-bay asbestos-sided residence; low-pitched gable roof; bracketed cornice and panelled frieze; 1/1 windows; glazed and panelled door behind period storm door; porch has flat roof, brackets at chamfered columns; square balusters and new railing; non-contributing garage.
39		c. 1860	Two and one half-story, three-bay residence; asbestos siding; gabled roof; new shed dormer; 2/2 and 6/6 windows; porch has Tuscan columns, turned balusters, new railing; glazed and panelled door with transom; outer door removed; bay on first story, south elevation; good condition.
41 - 45		c. 1885	Three attached 2½-story, 3-bay residences; gabled roof with pedimented dormers; intersecting roofline; clapboarded (#45, tarpaper siding); 1/1 sash; three, five-sided two-story towered bays on top two stories; polygonal roofs; panelling and shingles; double, glazed and panelled doors with transom; porches have turned members and some alterations; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>DuBois Street</u>		
	47-49	c. 1855	Two-and-one-half-story, six-bay double house; asbestos and tarpaper siding; 1/1 sash; shed dormer with 6/1; #47 has porch with turned members, panelling on columns and ornate brackets; #49 has new portico; panelled doors with transom and sidelights; good condition.
51		c. 1855	Two-and-one-half-story, two-bay clapboarded residence; gabled roof with large shed-type dormer; three-sided bay with panelling and shingling; bracketed cornice and simple rope-type trim on frieze; two-tiered porch with Tuscan columns; shingled railing; rock-faced cinder block basement; glazed and panelled door; 1/1 sash; good condition.
53		c. 1885	Two-story, two-bay brick residence; full basement; double, glazed and panelled doors; low-pitched gable roof; bracketed cornice and panelled frieze; simple architrave; 2/2 sash; stone sills and lintels; five-sided, two-story bay; porch has classical entablature; Tuscan columns, cast-iron balustrade; non-contributing garage.
55-57		c. 1885	Two-story, five-bay brick double house full basement; #55 has entry at first story, #57 at basement; bracketed cornice and panelled frieze; five-sided, full-height bay on left; 2/2 sash; stone lintels and sills; stone water table on #55; double, glazed and panelled doors with transoms; #55 has landing with straight balusters and aluminum canopy; #57 has arched hood over porch with sunburst panel and denticulated cornice; round columns on brick railing; good cond.
75-77		c. 1870	Two-story, six-bay brick double house; some aluminum siding; raised basement; mansard roof with polychrome slate and hooded dormer; bracketed cornice; 6/6 and 6/1 sash; arched lintels; stone sills; stone water table; glazed and panelled double doors with arched transoms (#77 has modern door); wood steps with straight railing; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>DuBois Street</u>		
	83-85	c. 1870	Two-and-one-half-story, six-bay double house; aluminum siding; mansard roof with patterned slate; hooded dormers; 6/6 sash; glazed and panelled doors with transoms; good condition.
	87	c. 1900	Two-story, four-bay residence; aluminum sided; flat roof; 1/1 sash; porch is aluminum sided; glazed and panelled door; good condition.
	89	c. 1885	Two-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 2/2 sash; stone sills lintels and water table; full-height, five-sided bay; double, glazed and panelled doors with transom; porch has bracketed cornice, turned members and brackets; good condition.
	91	c. 1885	Two-story, three-bay, brick residence; flat roof; decorative brickwork; 1/1 sash; brick lintels and sills; full-height rounded bay; porch has hipped roof, plain cornice and frieze; Tuscan columns with brick supports; glazed and panelled door; good condition.
	93	c. 1885	Two-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze in sunburst patterns; 1/1 sash; continuous stone sills and lintels; full-height rounded bay; porch has plain frieze and cornice, flared posts on brick piers, solid balustrate; double, glazed and panelled doors with transom; basement raised; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>DuBois Street</u>		
93A		c. 1885	Two-story, two-bay brick residence; flat roof; bracketed cornice, panelled frieze; 1/1 sash; stone sills and lintels, water table; five-sided, two-story bay; double, glazed and panelled doors; two-tiered porch has bracketed cornice, turned members, ornate brackets; basement is raised; good cond.
95-97		c. 1885	Two attached two-story, three-bay brick houses; raised basement; flat roof; elaborate bracketed cornice and panelled frieze; 1/1 and 2/2 sash; stone lintels and sills; glazed and panelled double doors with transom; porch has bracketed cornice and turned members and brackets; good condition.
99 - 101		c. 1885	Three-story, six-bay, brick double house; flat roof; bracketed cornice and panelled frieze; 2/2 windows; stone sills and lintels and water table; entries have transoms with glazed and panelled double doors; new landing; good condition.
183		c. 1905	Three-story, three-bay brick firehouse; flat roof; bracketed metal cornice; arched facade; 1/1 and 2/2 windows; third story has arched windows; "Chapman Steamer No. 1" above first story; modern panelled garage doors with segmental arches above with smooth and rough stone and keystone; two rock-faced stone belt courses and decorative brickwork; good condition.
185		c. 1905	Two-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; three-sided clapboarded and shingled bay on second story; 1/1 and 2/2 windows; stone sills and lintels; classical porch has Tuscan columns and turned balusters; glazed and panelled doors; good condition.

## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>DuBois Street</u> 191	c. 1905	Two-story, four-bay, brick residence; flat roof; bracketed cornice and panelled frieze; paired and single 1/1 windows; stone sills and lintels; decorative brickwork; right side with recessed with one boarded-up entry and one modern door; non-contributing
	193 - 97	c. 1900	One-story, six-bay garage; sloping roof; glazed and panelled garage doors; novelty and tarpaper siding; non-contributing
	199	c. 1885	Three-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels; arched transom, sidelights; glazed and panelled door; good condition.
	201	c. 1885	Three-story, three-bay, brick residence; flat roof; bracketed cornice and plain frieze; 6/1 windows; arched brick lintels and stone sills; new glazed and panelled door; porch has Tuscan columns and straight balusters; good condition.
	203-207	c. 1885	Three-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 windows; rock-faced stone sills and lintels and water table; five-sided, three-story bay; porch has turned members; transom sidelights and panelled door; one-story addition to right of rock-faced cinder block; contributing carriage house; nc-g
	209-211	c. 1885	One-story, multi-bay garage/carriage house; battened, glazed and panelled garage doors; second story loading door with double window; good condition.
	215 - 17	c. 1885	Two-story, four-bay, brick double house; low-pitched gable roof; bracketed cornice and panelled frieze; 1/1 and 2/2 windows; arched brick lintels and smooth stone sills; 215 - panelled door with transom; panelling in entry; simple stairs and landing; south elevation has recessed two-tier porch; good condition.
	221	c. 1885	Two-story, three-bay, brick residence; low-pitched roof; bracketed cornice and panelled frieze; 2/2 windows; brick lintels and stone sills; double, glazed and panelled doors with transom; classical porch with Tuscan columns and straight balusters; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANEG COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>DuBois Street</u>		
	225	c. 1885	Two-story, three-bay, brick residence with raised basement; flat roof; cornice aluminum sided; arched brick lintels with brick keystones and stone sills; 2/2 windows; double, glazed and panelled doors; transoms; new stairs; good condition.
	227	c. 1885	Two-story, three-bay, brick residence with raised basement; flat roof; cornice aluminum sided; 2/2 windows; arched brick lintels with keystones and stone sills; transom and double glazed and panelled doors; wood landing with straight railing; good condition.
	231	c. 1885	Two-story, six-bay, brick residence; originally a carriage house; flat roof; 6/1 windows set at different levels; first story enclosed with wide cornice filled in with wood; new windows; entry has fluted panelling above and below; early twentieth-century glass panelled door; good condition.
	233 A	c. 1885	One-story, multi-bay shed; clapboarded; gabled roof with false front; glazed and panelled garage doors and braced wooden doors; good condition.
	233	c. 1885	Three-story, three-bay, brick residence; low-pitched gable roof; bracketed cornice and panelled frieze; 2/2 windows; stone sills, lintels and water table; double door with louvres and transom; wood landing with straight balusters; good condition.
	6	c. 1880	Two-and-one-half-story, brick residence; mansard, patterned slate, two dormers with upper sash having stained glass around peripheries; bracketed cornice; square bay with crest rail, brick and terra cotta panels; gabled dormer with extensive shingling and panelling; porch has denticulated cornice and ornate frieze, slate roof and chamfered columns; double, glazed and panelled doors; 1/1 windows in recessed decorative brickwork area; stone sills and lintels; good condition.
	10	c. 1885	Three-story, two-bay brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels and water table; three-story, three-sided bay; double, glazed and panelled doors with transoms; hood has a mansard roof with crest rail; ornate frieze and heavy brackets; good condition.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>DuBois Street</u>		
14		c. 1905	Three-story, two-bay, brick residence; flat roof with cement band and brick band at top; paired and single 1/1 windows; shed-type hood with one column; glazed and panelled doors with sidelights; good condition.
18		c. 1870	Three-story, three-bay brick residence; low-pitched roof; bracketed cornice; 2/2 windows; arched brick lintels and stone sills; glazed and panelled doors with transom and sidelights; porch has simple entablature; flared posts on shingled balustrade; good condition.
20		c. 1850	Two-and-one-half-story, three-bay, brick residence; gabled roof; bracketed cornice and panelled frieze; 1/1 windows, stone sills, lintels and water table; double, glazed and panelled doors with transoms; bracketed portico has chamfered columns and straight balusters; good condition.
22		c. 1850	Two-and-one-half-story, brick residence; gabled roof; bracketed cornice and plain frieze; 1/1 windows; stone sills and lintels; classical porch has Tuscan columns and turned balusters; glazed and panelled doors with transom; good condition.
24 - 26		c. 1870	Two-story, six-bay, brick double house with mansard roof and raised basement; decorative hooded dormers; 1/1 and 2/2 windows with elaborate arched lintels and bracketed sills; stone water table; double, glazed and panelled doors with arched transoms; stoops have cast iron railings; 26 has end two-tier porch in rear; good condition.
30		c. 1865	Two-and-one-half-story, three-bay residence; gabled roof; asbestos siding; 6/6 windows; double, panelled doors with transom; cement landing with solid brick railing; good condition.
36		c. 1855	One-and-one-half-story, three-bay stuccoed residence; slate gabled roof with cross gables; decorative bargeboard and arched windows; central bay projects with second story arched French doors and entry with arched transom and glazed and panelled doors; porch has denticulated cornice, straight posts and balusters; one-story, square bay on south elevation; non-contributing garage

## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>DuBois Street</u>		
38		c. 1855	Two-and-one-half-story, three-bay residence; gabled roof with cross gables and decorative bargeboard; 2/2 windows; stone sills and lintels; porch enclosed with bracketed cornice and glazed and panelled door with sidelights and fanlight; non-contributing garage.
40		c. 1870	Two-and-one-half-story, three-bay, brick residence with raised basement; slate patterned mansard roof; hooded dormers, bracketed cornice and panelled frieze; 1/1 windows; arched lintels, stone sills and water table; portico has turned spindles and columns, straight balusters, transom and glazed and panelled double doors; good condition.
42		c. 1870	Two-story, two-bay, brick residence with raised basement and mansard roof; hooded dormers, bracketed cornice and panelled frieze; full-height, five-sided bay with panelling, cast-iron columns between windows and slate tower; porch has mansard roof, turned spindles and columns; double, glazed and panelled doors with transom; good condition.
46		c. 1860	Two-and-one-half-story, three-bay brick residence; gabled roof with cross gables, exposed rafters and decorative bargeboard; 2/2 windows; straight lintels and sills; stone water table; double, glazed and panelled door; pedimented portico with bargeboard and brackets; contributing carriage house.
48		c. 1865	Three-and-one-half-story, two-bay residence; gabled roof; 1/1 single, double and triple windows, some arched with cast-iron columns; full-height, five-sided bay with patterned slate roof; hooded dormer, panelling and shingling and cast iron columns between double windows; double, glazed and panelled doors with transom; porch has corkscrew turned spindles, turned columns, straight balusters; one-story panelled bay on south elevation; non-contributing garage.
50		c. 1865	Three-story, three-bay, brick residence; large round tower with conical roof and panelled frieze; elaborate panelled arched, double doors and arched window; portico has bracketed cornice, denticulated frieze and round columns with decorative capitols; mansard roof with cross gable with exposed rafters; arched brick lintels, stone sills and 1/1 windows; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>DuBois</u>		
	52 - 54	c. 1885	Three-story, four-bay, brick double house; flat roof; bracketed cornice and panelled frieze; continuous lintels and sills; 1/1 windows; two, three-sided bays either side with recessed panels and decorative brickwork; common porch with bracketed cornice, turned spindles and panelling under frieze; also turned and square columns and balusters; double, glazed and panelled doors with transoms; good condition.
	56 - 58	c. 1870	Two-and-one-half-story, four-bay, brick residence; mansard roof with hooded dormers; bracketed cornice and panelled frieze; two, two-story bays with panelling and shingling; elaborate, panelled, double doors with transom; portico has turned members and aluminum stair, balustrade; stone water table; good condition.
	60 - 64	1904	Gothic-style church of brick with stone trim; square tower with castellated parapet; single and triple pointed-arch windows with stained glass; stone foundation; elaborate doors; good condition.
	66 - 102 A	c. 1975	Large, irregular-shaped, modern hospital building; concrete and large plate glass windows; non-contributing.
	66 - 102 B	c. 1845	Four-and-one-half-story, fourteen-bay hospital building; contrasting light and dark stone; gabled roof with dormer; linked chimney; projecting, central gables bays; 6/6 windows; glazed and panelled, double doors; decorative trim; good condition.
	66 - 102 C	c. 1931	Eleven-story, twelve-bay, brick hospital structure with decorative stone trim; 1/1 windows; elaborate entrance with modern doors; non-contributing.
	66 - 102 D	c. 1965	Eight-story, multi-bay, brick hospital building; flat roof; canted corners; plate glass windows and doors; non-contributing.
	104	c. 1870	Two-story, three-bay, brick residence with mansard roof; hooded dormers, bracketed cornice; recessed panelled facade; double 1/1 windows; double, glazed and panelled door with transom; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>DuBois Street</u>		
108		c. 1865	Two-and-one-half-story, three-bay, brick residence; gabled roof; raised basement; molded cornice; 1/1 windows with two-tiered arched lintels; entry has decorative brickwork, panelling and new door; good condition.
110		c. 1865	Two-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 2/2 windows with arched lintels; classical porch with Doric columns and turned balusters; glazed and panelled door with arched transom; good condition.
112		c. 1860	One-and-one-half-story, three-bay residence; gabled roof with cross gables and exposed rafters; board and batten siding; arched and rectangular 1/1 windows; glazed and panelled door; bracketed porch with turned members; good condition.
114		c. 1885	Three-story, two-bay, brick residence; flat roof; bracketed cornice and decorative frieze; continuous stone lintels and sills on full-height, rounded bay; 2/2 windows; panelled door with transom; bracketed porch with Doric columns and turned balusters; good condition.
116		c. 1885	Two-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; radiating voussoirs and stone sills; windows and door boarded up; good condition.
118		c. 1885	Two-story, two-bay, brick residence; flat roof; bracketed cornice and decorative frieze; second story, three-sided bay, clapboarded; 1/1 windows, tripartite one on first story; classical porch with Doric columns and turned balusters; glazed and panelled double doors; good condition.
122		c. 1885	Two-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; three-sided, second story shingled and frame bay; 1/1 windows, stone sills and lintels; first story has tripartite window; double, glazed and panelled doors; classical porch with Doric columns and turned balusters; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>DuBois Street</u>		
	124	c. 1900	Two-story, three-bay, brick residence; flat roof; denticulated cornice and frieze with brackets at either end; 1/1 windows; one paired on first story; stone sills and lintels; panelled doors; porch has second story balustrade, denticulated and bracketed cornice, arches between brick piers and railing; good condition.
	126	c. 1885	Two-story, two-bay, brick residence; low-pitched gable roof, bracketed cornice and panelled frieze; 1/1 windows, stone sills and lintels; second story has square bay with panelling; tripartite window on first story; classical porch with Tuscan columns and turned balusters; glazed and panelled door with sidelights; good condition.
	128 - 30	c. 1885	Two-story, four-bay, brick double house; low-pitched gable roof; bracketed cornice and panelled frieze; 1/1 windows, stone sills and lintels; porch has classical entablature, flared posts on brick piers and turned balusters; two single doors, glazed and panelled; non-contributing garage.
	132	c. 1870	Two-story, three-bay, brick residence with mansard roof; hooded dormers; bracketed cornice and panelled frieze; 6/6 and 1/1 windows, stone sills and lintels; glazed and panelled door; porch has denticulated cornice, Tuscan columns, turned balusters; good condition.
	134	c. 1880	Three-story, three-bay residence; asbestos siding; flat roof; bracketed cornice; 1/1 windows with peaked surrounds; porch has decorative frieze, chamfered columns, brackets; shingled pediment at entry with double, glazed and panelled doors and transom; non-contributing garage.
	136	c. 1880	Three-story, three-bay residence; asbestos siding; bracketed cornice and panelled frieze; 1/1 windows with peaked surrounds; porch has shed-type roof with pediment, straight spindles and balusters, chamfered columns and brackets; double, glazed and panelled doors with transom; good condition.
	138	c. 1880	Three-story, three-bay brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels and water table; double, glazed and

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>DuBois Street</u> 138 (continued)		panelled doors with transom; landing with brick and stone, balustrade is solid; good condition.
144		c. 1855	Two-story, three-bay residence with asbestos siding; flat roof; bracketed cornice and panelled frieze; 2/2 windows; porch has turned spindles, columns and balusters; glazed and panelled door; good condition.
148		c. 1880	Three-story, three-bay residence with asbestos siding; flat roof and bracketed cornice; 2/2 windows; porch has turned spindles, columns and balusters; non-original glazed vestibule; encircling porch with bracketed cornice and spindle frieze, Doric columns; good condition.
150 - 54		c. 1855	Three attached two-story, three-bay residences with gabled roof; clapboarded and aluminum siding; cornice has paired brackets; different sized gabled dormers; two square bays with denticulated cornice; porticos with turned members; glazed and panelled doors with transoms and sidelights; one modern door; 1/1 and 2/2 sash; good condition
156		c. 1855	Two-story, two-bay, brick residence with low-pitched gable roof; bracketed cornice and panelled frieze; 1/1 windows, arched brick lintels and stone sills; first-story windows paired with straight lintel; porch has turned spindles and columns, straight balusters; glazed and panelled door, transom enclosed; good condition.
158		c. 1900	Two-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; three-sided shingled bay on second story; second story entrance; 1/1 windows; stone sills and lintels; two singled glazed and panelled doors; porch has denticulated cornice, Tuscan columns, turned balusters and second story entry; good condition.
160		c. 1855	Two-story, three-bay residence of brick; flat roof; bracketed cornice; 2/2 windows; arched brick lintels and stone sills; new wood door and porch with straight balusters and posts; good condition.
162		c. 1855	Two-story, two-bay residence with asbestos siding; gabled roof and bracketed cornice; three-sided, two-story bay; porch has denticulated cornice, Tuscan columns and turned balusters; glazed and panelled door, transom enclosed; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>DuBois Street</u>		
	164	c. 1880	Two-story, three-bay residence of brick; gabled roof and denticulated cornice with returns; 2/2 windows; stone sills and lintels; new shutters; transom atop glazed and panelled double doors; pedimented hood with heavy brackets; good condition.
	166	c. 1900	Two-story, three-bay residence of brick; low-pitched gable roof; bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; three-sided clapboarded and shingled bay on second story and on north elevation; glazed and panelled door; porch has turned members; good condition.
	170 - 72	c. 1855	Two attached 2-story, 3-bay residences with gabled roof; clapboarded and aluminum sided; bracketed cornice; 6/6 sash; classical entries with transoms, sidelights and glazed and panelled doors; one portico has turned members and spindles, ornate brackets, straight posts; second one has pedimented roof and novelty siding enclosure; original second-story windows; good condition See 121 - 214 R South Street.
182			
	184	c. 1880	Two-story, three-bay brick residence; flat roof; bracketed cornice and panelled frieze; 2/2 and 1/1 windows; straight brick lintels and stone sills; glazed and panelled door; molded porch cornice extends over landing and square bay projecting; good condition.
	186	c. 1880	Two-story, four-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 and 2/2 windows; central bay with decorative panelling and shingling; one new door with enclosed transom; original glazed and panelled door with extensive panelling; panelling on bay; good condition.
	188	c. 1875	Two-story, three-bay residence; flat roof; bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels and stone sills and water table; projecting glazed basement vestibule; main entry has double, glazed and panelled doors with arched transom; portico with denticulated cornice, straight balusters; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>DuBois Street</u>		
210		c. 1870	Two-story, three-bay brick residence with polychrome slate mansard roof; hooded dormers; bracketed cornice and panelled frieze; 2/2 windows; arched lintels and stone sills; porch retains bracketed cornice; three-sided panelled bay, arched transom, double, glazed and panelled doors; <del>good condition.</del>
216		c. 1885	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 and 2/2 windows with stone sills and lintels; full-height three-sided bay; double, glazed and panelled doors with transom; hood with shed-type roof and turned brackets; landing with straight balusters; non-cont. garage.
216 A		c. 1900	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills, lintels and water table; three-sided, two-story bay with decorative brickwork; transom above modern glazed and panelled door with one sidelight; simple landing; good condition.
218		c. 1885	Three-story, three-bay brick residence; flat roof; bracketed cornice and panelled frieze; 2/2 windows; stone sills and lintels and water table; double, panelled doors with transom; wood landing with straight balusters; good condition.
220		c. 1885	Two-story, three-bay brick residence; flat roof; bracketed cornice; second story square bay with shingled pediment; porch has straight spindles and balusters; shed-type roof and turned columns; glazed and panelled door with transom; five-sided bay with polygonal full-height roof; 1/1 windows with sills and lintels; -good condition.
222		c. 1885	Two-story, four-bay brick residence; low-pitched gable roof, bracketed cornice and panelled frieze; 2/2 windows, arched brick lintels, stone sills and brick water table;



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>DuBois Street</u>		
	222 (continued)		porch has shed-type roof; turned spindles, chamfered columns and solid balustrade; three-sided bay with decorative full-height brickwork; double, glazed and panelled doors with transom; good condition.
236		c. 1885	Two-story, two-bay, brick residence with flat roof; aluminum-sided cornice; 1/1 windows; stone sills and lintels and water table; two-story rounded bay; transom above new doors; sidelights enclosed; good condition.
238		c. 1885	Two-story, two-bay, clapboarded residence; raised basement; flat roof; paired brackets on cornice; full-height three-sided bay, flared between stories; stone water table; 2/2 windows; porch has denticulated frieze, turned spindles, panelled columns, square balusters, new wood door; good condition.
	<u>Edward Street</u>		
17		c. 1885	Three-story, three-bay, brick residence; flat roof; bracketed cornice and decorative frieze; full-height, three-sided bay; 2/2 windows, stone sills and lintels; windows and doors boarded up; good condition.
19		c. 1885	Three-story, three-bay, brick residence with raised basement; flat roof, bracketed cornice and decorative frieze; 2/2 windows with arched stone lintels, sills and water table; transom and double, panelled doors; single stairway; good condition.
21		c. 1885	Three-story, three-bay, brick residence with raised basement; bracketed cornice and decorative frieze; 1/1 windows with arched stone lintels, sills and water table; transom with double, panelled doors; simple stairway; good condition.
35		c. 1870	Three-story, three-bay, brick residence with raised basement; panelled facade; cornice and decorative arched frieze; 2/2 arched windows with brick lintels; arched transom above double, panelled doors, simple stair; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Edward Street</u>		
37		c. 1870	Three-story, three-bay, brick residence with raised basement; flat roof, bracketed cornice and decorative, arched frieze; panelled facade arched, 2/2 windows with brick lintels; arched transom above double, panelled doors; simple stair; good condition.
39		c. 1885	Three-story, three-bay, brick residence: flat roof and plain entablature; arched 2/2 windows; cornice-line above first story; double, panelled doors and transom; good condition.
43 - 73		c. 1884-1890	Two-story, multi-bay, brick commercial structure; facade is stepped with decorative tilework; plate-glass windows and doors; good condition. (See 70-74 Johnes St.)
20		c. 1885	Three-story, three-bay, brick residence with raised basement; flat roof, bracketed cornice and decorative frieze; arched 2/2 windows with brick lintels, stone sills and water table; double, glazed and panelled doors; simple stairs; good condition.
22		c. 1885	Three-story, three-bay, brick residence with raised basement; flat roof; bracketed cornice and decorative frieze; arched 2/2 windows with brick lintels, stone sills and water table; double, glazed and panelled doors; simple stairs; good condition.
24		c. 1885	One and one half-story, three-bay residence; shingled; slate gable roof with shed dormer; 2/2 windows; glazed and panelled door; broad front porch with square columns; good condition.
30		c. 1905	One-story, two-bay, brick garage; two sets vertical board doors; non-contributing.
34		c. 1885	Three-story, three-bay, brick residence; flat roof; bracketed cornice and decorative frieze; arched, 2/2 windows with brick lintels; stone sills and water table; double, glazed and panelled doors with arched transom; good condition.
36		c. 1885	Three-story, three-bay, brick residence; flat roof, bracketed cornice and decorative frieze; arched, 2/2 windows with brick lintels; stone sills and water table; double, glazed and panelled doors with transoms; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Edward Street</u>		
38		c. 1885	Three-story, three-bay, brick residence; flat roof, bracketed cornice and decorative frieze; arched, 2/2 windows with brick lintels; stone sills; glazed and panelled doors with transom; classical porch with Doric columns and turned balusters; good condition.
	<u>Farrington Street</u>		
23		c. 1870	Two-story, three-bay, brick residence with asbestos-shingled mansard roof, hooded dormer, bracketed cornice and plain frieze; 6/1 and 2/2 windows with radiating voussoirs and stone sills; transom and new glazed, panelled door; good condition.
25		c. 1870	Two and one half-story, three-bay residence; aluminum sided; gabled roof with bargeboard; 6/6 windows; panelled door with transom and sidelights; wood landing with plain railing; good condition.
39		c. 1870	Two-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 single and paired windows; three-sided panelled bay shares roof with porch; transom above panelled door; square bay on east elevation; good condition.
41		c. 1895	One-story, one-bay garage; rock-faced cinder block; hipped roof; double, glazed and panelled doors; non-contributing.
51		c. 1885	Three-story, three-bay, brick residence; low-pitched gable roof; two-story, three-sided shingled bay on second and third stories; molded & bracketed cornice; 1/1 windows with radiating voussoirs; glazed and panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Farrington Street</u>		
	53	c. 1870	Two-and-one-half-story, three-bay, brick residence; flat roof; bracketed cornice; 2/2 and eyebrow windows, brickbands beneath latter; arched brick lintels and stone sills; altered entry with new glazed and panelled door; portico has shed-type roof with straight posts and solid balustrade; good condition.
	55	c. 1870	Two-and-one-half-story, three-bay, brick residence; low-pitched gable roof and bracketed cornice; 2/2 eyebrow and regular windows; arched brick lintels and stone sills; altered, glazed and panelled door; pedimented portico with full entablature; straight posts; good condition.
	57	c. 1870	Two-and-one-half-story, three-bay residence of brick; low-pitched gable roof; bracketed cornice with raking trim; 2/2 eyebrow windows with horizontal brick band beneath; radiating voussoirs and smooth stone sills; 2/2 windows; entry has radiating voussoir, transom, enclosed sidelights, old, glazed and panelled storm door with glazed and panelled inner door; good condition.
	59	c. 1870	Two-and-one-half-story, three-bay, brick residence; low-pitched gable roof and plain cornice; arched brick lintels and stone sills; windows and door boarded up; porch removed; good condition.
	61	c. 1880	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 4/4 windows; radiating voussoirs and stone sills; new panelled door with transom; classical porch has Tuscan columns on solid balustrade; good condition.
	63	c. 1865	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; radiating voussoirs and stone sills; new glazed and panelled door; enclosed transom; porch has shingled gable, grouped Tuscan columns on panelled piers and turned balusters; good condition.
	65 - 69	c. 1890	Three attached three-story, two-bay brick residences; flat roof, bracketed cornice, panelled frieze; 1/1 sash; stone sills, lintels, water table; three three-story, rounded bays; glaze and panelled door; second-story single doors; stone steps and straight wood railings; one porch with turned member

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Farrington Street</u> 65 - 69 (continued)		and one removed and one altered; good condition.
6 - 16		c. 1870	Six attached three-story, two-bay brick residences with raised basements; flat roof; bracketed cornice, panelled frieze; 2/2 sash; boarded up windows; stone sills, lintels with twisted rope ornamentation, water table; double, glazed and panelled doors with transom and altered entry; stone steps and cast iron railings; five two-story five-sided bays with bracketed cornices; good condition.
26		c. 1870	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows with stone sills and lintels; altered entry with panelled doors; two-story, west elevation bay has second story porch and enclosed first story; good condition.
40			See 124 R Lander Street.
42		c. 1890	Two-and-one-half-story, two-bay, brick residence; squared tower with flared pyramidal and recess with windows and double, glazed panelled doors; porch has bracketed cornice, turned members, ornate brackets; round, two-story bay with bracketed cornice; pedimented gable end with slate; main door is double, glazed and panelled with transom; 1/1 wnd 2/2 windows; stone sills, lintels and water table; good condition.
44		c. 1865	Two-story, three-bay, brick residence with raised basement and polychrome slate mansard roof; hooded dormers; bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels and stone sills and water table; doors altered, transom; shed-type hood with plain brackets; wood stairs; good condition.
46		c. 1865	Two-and-one-half-story, three-bay, brick residence; low-pitched gable roof and bracketed cornice; 3/3, eyebrow, 6/6 windows; arched brick lintels, stone sills and water table; double, glazed and panelled doors; transom; shed-type roof on new portico, wood landing; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Farrington Street</u>		
	48	c. 1880	Three-story, three-bay, brick commercial/residential structure with mansard roof and patterned polychrome slate; hooded dormers; bracketed cornice and panelled frieze; 2/2 windows; arched lintels and stone sills; storefront altered: cornice removed; new windows cut in and new entry; residential entry has new doors; portico has panelling and square posts; good condition.
	58 - 60½	c. 1880	Two attached two-story, four-bay brick double houses; flat roof and bracketed cornice; 2/2 and 1/1 sash; brick lintels, water table; stone sills; two three-sided bays on second story have panelling; four entries; some glazed and panelled doors with transoms and some alterations; wood landings with straight balusters and some altered porticos; good condition.
	62 -64	c. 1910	One-story, brick church; gable end faces the street; casement windows with round arched transoms; square corner tower with pyramidal roof, arched louvred windows and entry in tower; good condition.
	70	c. 1905	Three-story, three-bay, brick residence with some aluminum siding; flat roof; molded cornice; two-story, three-sided bay on top two stories; new 1/1 windows; straight brick lintels or radiating voussoirs and stone sills; glazed and panelled door; good condition.
	72	c. 1905	Two-story, three-bay, brick residence; flat roof; bracketed cornice and straight rope-type trim on frieze; windows and door boarded up; porch has turned columns and spindles, straight railing, stone retaining wall in front; smooth stone sills and lintels of contrasting stone; windows on side have radiating voussoirs and stone sills; good condition.
	74	c. 1905	Two-story, three-bay, brick residence; flat roof and aluminum-sided cornice; 1/1 windows; smooth stone sills and lintels; double, glazed and panelled doors; three-sided bay on second story; porch has denticulated cornice, Tuscan columns, turned balusters; good condition.

EAST      END      HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Federal Street</u>		
6		c. 1870	Three-story, three-bay residence of brick; flat roof, bracketed cornice and panelled frieze; 2/2 windows with stone sills and lintels; double, panelled doors with transom with small panes around large pane; first story windows altered; good condition.
8 - 10		c. 1920	One-story, commercial garage; cinder block; flat roof; garage door, recessed regular entry and small boarded-up window; non-contributing.
	<u>First Street</u>		
	107		See 85 R Grand Street
109		c. 1840	One-and-one-half-story, three-bay residence; gabled roof; asbestos siding; 3/3 eyebrow, 6/6 and 8/1 windows; entry has molded surround, transom with leaded glass; new glazed and panelled door; wood landing with plain wood railing; good condition.
113		c. 1845	Two-and-one-half-story, three-bay residence; clapboarded; aluminum siding on sides; low-pitched gable roof, bracketed cornice and denticulated and panelled frieze; glazed and panelled door with transom; porch has decorative brackets, straight posts and turned balusters; good condition.
115 - 117		c. 1845	Two-attached three-and-one-half-story, three-bay residences; clapboarding and asbestos siding; flat roof and bracketed cornice; double, glazed and panelled doors; 1/1 sash; transom; #117 has portico with hipped roof, turned spindles and columns and straight balusters; good condition.
119		c. 1845	Two-story, three-bay commercial/residential building; low-pitched gable roof, bracketed cornice and panelled frieze; asbestos siding; 2/2 windows; rounded bay with dome roof and denticulated cornice on second story; projecting storefront has recessed entry with rounded arch above; display windows and glazed and panelled doors; metal roof; good condition.
119 Rear (on Liberty St.)		c. 1890	One-story, one-bay, clapboarded shed; flat roof; glazed and panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>First Street</u> 129		See 189 R Liberty Street
181		c. 1865	Two-and-one-half-story, three-bay, brick residence; gabled roof with one gabled dormer; molded cornice, denticulated and ornate frieze; 1/1 windows have arched brick lintels; glazed and panelled door; good condition.
183		c. 1865	Two-and-one-half-story, three-bay residence; aluminum siding; gabled roof, bracketed cornice and plain frieze; 6/6 windows; panelled door and early-20th-century vestibule; good condition.
185		c. 1865	Three-and-one-half-story, three-bay, brick residence, gabled roof, bracketed cornice and panelled frieze; 6/6 windows with arched brick lintels and stone sills; glazed and panelled double doors; decorative period porch with brackets; non-contributing garage.
191		c. 1870	Three-and-one-half-story, three-bay, brick residence; low-pitched gable roof, bracketed cornice and decorative frieze; 6/6 windows with straight lintels and sills; recessed entry has glazed and panelled door, sidelights and transom; modern stairs; good condition.
193		c. 1870	Three-and-one-half-story, three-bay, brick residence; low-pitched gable roof; boldly bracketed cornice and decorative frieze; 2/2 windows, plain stone lintels, sills and water table; porch has turned members, brackets and wooden stairs; contributing carriage house
197		c. 1870	Two-story, three-bay, brick residence with mansard roof and raised basement; decorative slate, hooded dormers, bracketed cornice and ornate frieze; 2/2 windows; arched stone lintels have keystones; stone belt course and water table, double, panelled doors and transom; good condition.



EAST **END** HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>First Street</u>		
	215	c. 1885	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; two three-sided bays with shingling and panelling; double, glazed and panelled doors with transom; single and double 1/1 windows, smooth stone sills and lintels; good condition.
	217-221	c. 1885	Three attached two-story, two-bay brick residences; flat roof, bracketed cornice and panelled frieze; three square panelled bays on second story; single and double windows with stone lintels and sills; 1/1 sash; glazed and panelled doors with transoms; rock-faced lintels; good condition.
	223	c. 1885	Three-story, three-bay, brick commercial/residential building; flat roof and bracketed cornice; 1/1 windows, arched brick lintels and stone sills; storefront has cornice removed; central glazed and panelled door, transom, display windows with panelling; residential entry has panelled door and transom; good condition.
	229		See 57 R City Terrace
	231	c. 1885	Two-story, three-bay residence; asbestos siding; flat roof; cornice is aluminum sided with aluminum brackets; 1/1 windows; double, glazed and panelled doors with transom; first story screened-in porch has aluminum siding; good condition.
	233	c. 1885	Three-story, three-bay, brick residence; flat roof and bracketed cornice; 2/2 windows; arched brick lintels, stone sills and brick water table; double, glazed and panelled doors with arched transom; good condition.
	235	c. 1870	Two-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels and sills; double, glazed and panelled doors with arched transom; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>First Street</u>		
	239	c. 1885	Three-story, three-bay, brick residence; flat roof; bracketed cornice, denticulated and panelled frieze; 1/1 windows; stone sills, lintels and water table; double, glazed panelled door; porch has mansard hood with crest rail, turned spindles, decorative brackets and pendants; west elevation has rounded, two-story shingled and panelled bay; good condition.
	245	c. 1870	Two and one half-story, two-bay residence; aluminum siding; gabled roof with exposed rafters; central eyelid dormer on facade; glazed and panelled door; recessed porch has turned members and straight balusters; shallow square bay on facade; second story is flared; good condition.
	247	c. 1890	Two-story, four-bay residence; gambrel roof; bracketed cornice and panelled frieze; tarpaper sided; 1/1 and 2/2 windows; enclosed porch has glazed and panelled door; good condition.
	249	c. 1885	Two-story, two-bay, clapboarded residence; flat roof; bracketed cornice and panelled frieze; full-height, five-sided, panelled bay; glazed and panelled door with transom; turned balusters on landing; good condition.
	251 - 53	c. 1885	Two-story, four-bay double house, asbestos siding; flat roof and simple cornice; 2/2 windows; two five-sided bays; 251 - double glazed and panelled door with transom; Tuscan columns on shingled railing; good condition.
	255	c. 1870	Two-story, three-bay, clapboarded residence; asbestos siding on sides; flat roof; bracketed cornice and panelled frieze; 2/2 windows; porch has turned members, panelled door and glazed vestibule; good condition.
	257	c. 1870	Two-story, three-bay residence with mansard roof; tarpaper siding; hooded dormers and bracketed cornice; 6/6 windows; transom, non-original glazed and panelled doors; portico has straight posts and hipped roof; good condition.

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>First Street</u>		
259		c. 1885	Two-story, three-bay asbestos-sided residence ; flat roof, bracketed cornice and panelled frieze; 2/2 sash; five-sided, two-story bay with molded and denticulated first-story cornice that continues to form belt course; cast iron columns; glazed and panelled door; porch has modern cast-iron columns; good condition.
263		c. 1885	Three-story, three-bay, brick commercial/residential building; flat roof; bracketed cornice and panelled frieze; 2/2 sash; segmentally arched windows; stone sills and water table; storefront cornice removed; central entry with transom; glazed and panelled door; display windows with panelling; residential entry has arched transom and new glazed and panelled door; good condition.
70		c. 1872	One-story, three-bay brick church with four- and five-story towers; gabled roofs; panelled facade; buttresses with stone caps; pointed-arched windows and door surrounds with brick labels; several oculus windows; stained glass windows; vertical board doors; very good condition.
80-82		c. 1880	Two-and-one-half-story, three-bay brick residence; flat and hipped roofs with two cross gables; polychrome slate, ornate bargeboard; 1/1 sash; rock-faced stone sills and lintels; three-sided, two-story bays with flat roofs have crest rails and denticulated cornices; porch has denticulated cornice, Tuscan columns, turned balusters; double, glazed and panelled doors; good cond.
90-96		c. 1930	Eight-story, eleven-bay, brick hotel; flat roof with cement bands and decorative brickwork near top; U-shape with one-story section across open end; parapet with cement band, round-arched door surrounded with stucco panel keystone, leaded-glass transom; doors altered, flanked by windows with cement lintels; 1/1 sash with transom and modern display windows; good condition.

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>First Street</u>		
	112-120	c. 1837	Five attached two-and-one-half- to three-and-one-half-story, three-bay clapboarded rowhouses; flat roof; plain, bracketed denticulated cornices; eyebrow windows (some enlarged); 1/1, 6/1, 6/6 sash; classical entries with panelled or glazed doors; transoms, sidelights; pilasters; landings and stairs have turned and straight balusters; good condition.
	120 Rear (on Liberty St.)	c. 1860	Two-story, four-bay carriage house; gabled roof with small cupola; clapboarded; 6/6 and 2/2 sash; vertical-board loading doors on second story; glazed and panelled garage doors; two-story rear lean-to addition; good condition.
	128	c. 1885	Three-and-one-half-story, two-bay brick residence; low-pitched gable roof; bracketed cornice and panelled frieze; 1/1 and 2/2 sash; full-height, stone water table, sills and lintels; lintels have twisted rope-type trim; mansard roof with straight brackets; new landing and stair rail; newer glazed and panelled door with transom; good cond.
	144	c. 1870	Two-story, three-bay brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 sash; double-arched brick lintels and stone sills; bracketed storefront cornice; altered double doors and transom; flanked by cast-iron columns, display windows are covered by modern siding with new windows cut in; residential entries altered; good condition.
	148	c. 1900	One-story, three-bay brick commercial structure; flat roof; windows and door boarded up; good condition.
	160	c. 1870	Three-and-one-half-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 6/6 sash; arched lintels, stone sills and water table; new wooden door; transom enclosed; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>First Street</u>		
	162	c. 1870	Three-and-one-half-story, three-bay brick residence; flat roof; bracketed cornice and panelled frieze; windows missing or boarded up; stone sills, lintels and water table; three-sided bay on first basement levels has flat roof and bracketed cornice; entry accommodated double doors; fair cond.
	164	c. 1870	Three-and-one-half-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows, arched brick lintels; stone sills and stone water table; cement landing with new railing; transom enclosed, new wooden door; good condition.
	170	c. 1870	Three-story, three-bay brick commercial residential structure; flat roof, bracketed cornice and panelled frieze; arched lintels, stone sills; windows knocked out; first-story bracketed cornice; new pent roof; residential entry has double, glazed and panelled doors; display windows; removed doors; good condition.
	184	c. 1885	Three-story, two-bay brick residence; low-pitched gable roof, bracketed cornice and panelled frieze; 1/1 sash; five-sided, three-story bay; stone sills and lintels; transom atop new glazed and panelled door; original, panelled door on east elevation; good condition.
	186-194	c. 1910	Three-story, eleven-bay brick hospital nurses' residence; 6/6 sash; straight brick or stone lintels with keystones and stone sills; denticulated cornice; pediment with garland wreath designs; second-story door with panelled "fanlight," sidelights, pilasters; cast-iron balcony atop classical portico with paired stone columns with foliated capitals; entry has fanlight, sidelights, pilasters and panelled door; brick belt course; pineapple urn atop roof; good condition.

AST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>First Street</u>		
	226	c. 1870	Three-story, three-bay commercial/residential structure; brick and asbestos siding; front section has flat roof, bracketed cornice and panelled frieze; 1/1 and 2/2 sash; new store-front entry; additions in rear are one-and-one-half or three stories, clapboarded or asbestos sided, gabled roofs; good condition.
	230	c. 1880	Three-story, four-bay brick residence; flat roof with cornices removed; 1/1 and 2/2 sash; segmentally arched windows and stone sills; entry has transom and panelled door; good condition.
	232	c. 1880	Three-story, three-bay brick commercial residential structure; flat roof; bracketed cornice and panelled frieze; 2/2 windows; segmentally arched windows; bracketed storefront cornice; recessed entry and display windows boarded up; residential entry has enclosed transom and glazed and panelled door; good condition.
	234-236	c. 1865	Two attached two-story, three-bay residences; flat roof; bracketed cornice; asbestos siding; 1/1 and 2/2 windows; classical porches with Tuscan columns; straight and turned balusters; glazed and panelled doors; good condition.
	238	c. 1865	Two-story, three-bay residence with hipped roof; asbestos siding; 1/1 sash; simple bracketed cornice; glazed porch with Tuscan columns and pilasters; wood landing with straight balusters; glazed and panelled door; good condition.
	242	c. 1870	Three-story, three-bay brick residence; flat roof; bracketed cornice and panelled frieze; 2/2 sash; straight and segmentally arched windows; stone sills and water table; glazed and panelled doors, arched transom; five-sided bay on first story; porch has turned members, bracketed cornice, panelled frieze, ornate brackets; good condition.

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>First Street</u>		
244		c. 1875	Two-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 sash; stone sills, lintels and water table; double, glazed and panelled doors; transom; five-sided two-story bay; porch has turned members and brackets; good condition.
246-248		c. 1875	Three-story, five-bay brick double house; flat roof; bracketed cornice; 2/2 windows; stone sills and lintels; glazed and panelled door; porch has Tuscan columns and turned balusters; good condition.
250 Rear		c. 1870	One-and-one-half-story, three-bay residence; gabled roof; tarpaper siding; bracketed cornice; 1/1 sash; porch has new straight posts and board railing; glazed and panelled door; good condition.
250-252		c. 1870	Three-story, six-bay brick double house; flat roof, bracketed cornice and panelled frieze; 2/2 sash; segmentally arched windows, arched transom; new and original glazed and panelled doors, sidelights enclosed; one porch with straight spindles, turned columns, new cast-iron balusters; stair rail is either straight wood or straight balusters; stone water table; good condition.
254		c. 1870	Two-story, three-bay residence; gable roof; asbestos siding; 1/1 sash; glazed and panelled door; porch has simple cornice, straight posts and balusters; good condition.
256		c. 1880	Two-story, two-bay brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 sash; stone sills, lintels and water table; full-height round bay; double, glazed and panelled doors; porch has panelled frieze, turned columns, new balusters and stair rail; good condition.
258		c. 1880	Two-story, two-bay brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 sash; stone water table, sills and lintels; full-height, three-sided bay; door boarded up; porch has turned members and brackets; good condition.

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>First Street</u>		
	260	c. 1880	Two-story, two-bay residence; flat roof bracketed cornice and panelled frieze; tarpaper siding; 1/1 sash; full-height, three-sided bay, flared between stories double, glazed and panelled doors with transom; porch has turned members and ornate brackets; good condition.
	262	c. 1870	Two-story, three-bay residence; gabled roof and denticulated cornice; aluminum sided; enclosed round gable window; 1/1 sash; porch has simple frieze; turned members and ornate brackets; glazed and panelled door; enclosed transom; good condition.
	264	c. 1880	Two-story, three-bay commercial/residential building; flat roof, bracketed cornice and panelled frieze; 1/1 sash; stone sills and lintels; altered storefront with new window and door; residential entry has double, glazed and panelled doors with transom; good condition.
	<u>Gidney Avenue</u>		
	5	c. 1885	Two-story, two-bay brick residence; flat roof, bracketed cornice and panelled frieze; arched single and paired windows; 2/2 sash; glazed and panelled door with transom; good condition.
	7	c. 1885	Three-story, four-bay brick residence; flat roof; bracketed cornice and panelled frieze; 2/2 or 6-light sash; belt course; new glazed and panelled door, arched transom; good condition.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Gidney Avenue</u>		
23		c. 1885	One-and-one-half-story, three-bay residence; tarpaper siding; gabled roof, delicately molded cornice with returns; obscured windows and doors; simple porch; good condition.
25		c. 1885	Two-story, three-bay, brick residence; flat roof and bracketed cornice; arched 1/1 windows with tiered radiating voussoirs; glazed and panelled door with arched transom; good condition.
43		c. 1880	Two-story, three-bay, brick residence with slate mansard roof and raised basement; hooded dormers, bracketed cornice and decorative frieze; arched 2/2 windows with bold and ornate cast iron lintels and sills; French windows and door obscured; arched transom; simple, new porch; good condition.
47		c. 1900 c. 1965	Two-story, multi-bay brick school with similar one-story wing; flat roof; modern plate-glass windows and doors; excellent condition.
55		c. 1880	Three-story, three-bay, asbestos-sided residence; flat roof; bracketed cornice and decorative frieze; 1/1 windows; glazed and panelled door with bracketed hood; full-height, five-sided bay on side; good condition.
22		c. 1885	Three-story, two-bay, brick residence; flat roof, molded and bracketed cornice and decorative frieze; 2/2 windows; stone lintels, sills and water table; glazed and altered doorway good condition,
24		c. 1845	Two-story, three-bay residence; flat roof with deeply projecting bracketed eaves and plain frieze; tarpaper siding; 2/2 windows and French doors; glazed and panelled door in sided vestibule with period roof and entablature; fair condition.
88 - 90		c. 1885	Three-story, five-bay, brick commercial/residential building; flat roof, molded and bracketed cornice and panelled frieze; 1/1 and 2/2 windows with smooth and rock-faced lintels; rounded, full-height bay at right; projecting, full-height section at

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Gidney Avenue</u> 88 - 90 (cont'd)		left has original storefront; recessed central section has glazed and panelled door and porch with shed-type roof and turned members; good condition.
	<u>Grand Street</u>		
1		c. 1865	Two-and-one-half-story, three-bay brick residence; gabled roof; 1/1 and eyebrow windows; arched lintels; double, glazed and panelled door; landing has heavy cast iron railing; denticulated cornice and narrow panelled frieze; good condition.
5		c. 1865	Two-story, five-bay, brick residence with mansard roof; hooded dormers; bracketed cornice and panelled frieze; 4/4 windows; arched lintels, stone drip courses and stone sills; original one-story wing at southwest corner; double doors, arched transom; foliated drip course landing with heavy cast iron railing; panelled chimneys; good condition.
13		c. 1885	Three-story, three-bay, brick residence; flat roof; bracketed cornice and plain frieze; 1/1 windows; stone sills and lintels; recessed glazed and panelled door; good condition; non-contributing garage.
17		c. 1885	Three-story, five-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows, stone sills and lintels; central entrance with single doorway, panelled vestibule and altered inner door; Ann Street elevation has aluminum-sided bay with panelled frieze on second story; good condition.
21		c. 1865	Two-story, five-bay, brick residence with mansard roof and patterned slate; flat roofed dormers; 6/6 windows; arched brick lintels; string course; brick vestibule with flared roof; large lintel with keystone above glazed and panelled double doors; two-story original rear section; good condition.
23		c. 1890	Four-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; four-story, three-sided bay; 1/1 windows; straight stone sills and lintels; glazed and panelled door with transom; good condition.

EAST END I HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u>		
	45 - 47	c. 1920	Two-story, five-bay brick commercial building with limestone facade; parapet topped by urns; sides are stuccoed; panelled frieze; denticulated cornice and four-stone medallions of animals; five full-height arches, demarked by pilasters with first- and second-story windows separated by metal panels.
	49	c. 1905	Three-story, four-bay residence of rock-faced stone; flat roof; denticulated cornice and decorative frieze with garlands; 1/1 and stained glass windows; stone sills and lintels; two-story, three-sided bay with balustrade atop, recessed entry with round arched opening; double, glazed and panelled door with transom; "St. Patrick's School" on transom; good condition.
	55	1854; 1868	Two-story, five-bay, brick residence with slate mansard roof; hooded dormers, bracketed cornice and panelled frieze; 2/2 windows; arched and straight lintels; stone sills and water table; left two bays project; vestibule with bracketed cornice, pilasters and round, arched panel atop; arched transom and double, panelled doors; brownstone landing with old cast iron railing; good condition.
	61 - 63	1839; 1860; 1960	One-story, three-bay, stone church; gabled roof; cruciform plan; central square three-story tower and small towers at corners; arched, louvred openings in belfry; tall pointed, arched windows along sides; first story facade altered; good condition.
	69	c. 1900	Three-story, two-bay, brick residence; flat roof, bracketed cornice and denticulated frieze; 1/1 windows: triple radiating voussoirs; stone sills and water table; double, glazed and panelled doors with sidelights; portico has Tuscan columns, pedimented gable with dentils; brownstone landing with cast iron stair rail; good condition.
	73	c. 1855	Two-and-one-half-story, four-bay residence; asbestos sided; low-pitched gable roof and bracketed cornice; 3/3 eyebrow and 2/2 and 6/6 windows; four-story squared tower with flat roof, bracketed cornice and French door; classical porch has Tuscan columns and turned balusters; glazed and panelled door, transom and sidelights; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u>		
85		c. 1865	Two-story. five-bay. brick residence with mansard roof; hooded dormers, bracketed cornice and panelled frieze; 1/1 windows; arched lintels and stone sills; entry in projecting full-height bay, elaborate door surround and cornice, panelling; glazed and panelled door with transom and side-lights; brownstone steps with old cast iron railing encircling classical porch; good condition.
	85 Rear (on First Street)		One-and-one-half-story, three-bay, brick carriage house; gabled roof with cross gables, small louvred cupola with pointed roof; arched windows; loading door on second story and vertical board carriage doors; good condition.
91		1834; 1877	Two-and-one-half-story, three-bay clapboarded church; gabled roof with denticulated pediment on facade; central, projecting, four-story tower; panelled belfry with denticulated cornice and frieze; round dome with weathervane atop; three classical entries have pilasters; double, panelled doors, denticulated cornices; 6/6 windows; good condition.
97		c. 1845	One-and-one-half-story, three-bay parish house stuccoed; gabled roof with returns; double, panelled doors; large, multi-paned windows; cupola with pyramidal roof; cross section with gables in rear; good condition.
103 - 107		c. 1870	Two-and-one-half-story, seven-bay, brick institutional structure with mansard roof; hooded dormers, central one has Palladian-type window; bracketed cornice and panelled frieze; 4/4 windows with stone sills, lintels and water table; central projecting pavillion with massive stone door surround with gable, pilasters, arched double doors; good condition.
109		1853; 1878	Two-story, six-bay, brick parish house; gabled roof with cross gables; "L" shaped plan; arcaded elevations; stone sills and water table; arched and rectangular 6/6 windows; stained glass around perimeters of some windows; entry in vestibule has panelled door with elaborate fanlight; good condition.

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u>		
	117-119	1819, 1853	One-story, three-bay, stone church; round-arched windows with tracery; arched, double, panelled doors; stone water table, pedimented gable has circular recess and raking cornice; frame, bell tower with dome, arched louvered openings flanked by Doric columns and pilasters at corners; good condition.
	127	1841	Two-story, five-bay <sup>2</sup> , stone court house; gabled roof; pediment with raking cornice; Doric columns, cupola; large 6/6 sash; tall entry with double, panelled doors and panelling above; modern addition extends across back to form T-shaped structure; good condition.
	135	c. 1845	Two-and-one-half-story, four-bay residence; asbestos siding; gabled roof; two gable windows on south elevation; 6/6 and 1/1 sash; panelled door, transom, sidelights; portico has gabled roof with raking cornice, scroll sawn pediment detail, round spindles, chamfered columns, fan-type brackets; landing and steps removed; two-and-one-half-story, cross-gabled bay with large gable window and two-story, three-sided bay; good condition.
	143	1865	Two-and-one-half-story, two-bay residence; gabled roof; asbestos sided; 1/1 and 8/8 sash; bracketed cornice; three-story square and three-sided bay has shingled gable; third-story porch with turned columns and balusters; stained-glass window; glazed and panelled door with transom and sidelights; canopy with turned spindles, heavy brackets; good condition.
	145	c. 1885	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 sash; stone sills and lintels and water table; five-sided, three-story bay, two glazed and panelled doors and new flush board door; landing with cast-iron stair rail; good condition.

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u>		
	147	c. 1885	Three-story, four-bay brick double residence; flat roof, bracketed cornice and panelled frieze; 2/2 sash; stone sills and lintels, water table; five-sided, three-story bay; two glazed and panelled doors and new flush board door; landing with cast-iron stair rail; good condition.
	149	c. 1845	Two-and-one-half-story, three-bay residence; gabled roof; aluminum sided; hooded dormer and gabled dormer; cornice removed; 1/1 sash; glazed and panelled door with transom and sidelights; gabled portico has shingled pediment, straight spindles, chamfered and fluted columns; good condition.
	149 Rear (on Catherine)		One-story, two-bay, brick garage; original wooden doors; hipped roof; non-contributing.
	151	c. 1845	Two-and-one-half-story, three-bay residence; clapboarded; gabled roof; wide gabled dormer is shingled with denticulated cornice; bracketed cornice; 1/1 sash; windows with heavy wooden lintels; glazed and panelled door; transom and sidelights; portico has modillion cornice, new posts and railing; good condition.
	153	c. 1870	Three-story, two-bay residence; flat roof; bracketed cornice; aluminum sided; three-sided three-story bay with bracketed cornice, fluted and round pilasters; new glazed and panelled door, sidelighted, enclosed transom; 1/1, 2/2 and 1/2 sash; good condition.
	155	c. 1845	Two-and-one-half-story, three-bay residence; gabled roof; vinyl sided; three-pane, 1/1 sash; eyebrow windows; later glazed and panelled door, transom and sidelights; portico has gabled pediment, denticulated cornice, Tuscan columns and turned balusters; good condition.

## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u>		
	157	c. 1845, c. 1880	Two-and-one-half-story, two-bay residence; clapboarded; gabled roof and bracketed cornice; 1/1 sash; projecting three-sided, two-story gabled bay with panelling and bracketed cornice between stories; glazed and panelled door, transom and sidelights; portico has gabled roof with returns; Tuscan columns; good condition.
159		c. 1885	Two-story, three-bay residence with mansard roof; straight dormers with garland design; 1/1 windows and French doors; bracketed cornice; porch has bracketed cornice, arcading between columns and decorative railing; panelled door; sidelights with tracery and pilasters with denticulated over-door; good condition.
163		c. 1845	Two-and-one-half-story, three-bay clapboarded residence; gabled roof, bracketed cornice and rope-type trim on frieze; south elevation has one-story, square bay with denticulated cornice, panelling and shingling; 1/1 sash; glazed and panelled door with transom, sidelights, pilasters; porch has turned spindles and columns (on piers), straight balusters; good condition.
165		c. 1845, c. 1865	Two-and-one-half-story, four-bay clapboarded residence; gabled roof; right gabled projection has clipped gable, decorative bargeboard, two-story, five-sided ornate bay; 1/1 sash; French windows; non-original, double, glazed and panelled doors with transom; porch has bargeboard, intricate old cast-iron columns, stair rail and balusters good condition.
169		c. 1855, c. 1872	One-story, three-bay brick church with gabled roof with exposed rafters; central projecting, square tower with tall slated mansard roof; louvred hooded dormers and bracketed cornice, arched window with fanlight and label, then triple windows and entry with double, panelled doors, fanlight and label; two flanking towers are one-and-one-half-story with mansard and slate roofs; bracketed cornices, arched windows with labels; quoining on raised basement; side windows are tall and arched. good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u>		
	177	c. 1840	Two-and-one-half-story, three-bay residence; gabled roof with returns; aluminum siding; 6/6 windows; three-sided, one-story bay on south elevation; panelled door; transom and sidelights; wood landing with turned balusters; good condition.
	185	c. 1855, c. 1870	Two-and-one-half-story, four-bay residence; gabled roof and gabled dormers; 6/1 and 1/1 windows; asbestos sided; glazed and panelled door with transom and sidelights; new landing and railing two-and-one-half-story projection with clipped gable and bargeboard; three-sided, two-story bay with balustrade, panelling, dentils; good condition.
	189	c. 1860	Two-and-one-half-story, three-bay brick residence; gabled roof; bracketed cornice and panelled frieze; second-story windows are arched with labels; panelled door with arched transom; encircling porch has pediment with sunburst panel, turned columns, straight balusters, bracketed cornice; one-story bay with flared hipped roof and bracketed cornice; narrow 1/1 sash; good condition.
	193	c. 1860	Two-and-one-half-story, two-bay brick residence; cross-gabled roof; bargeboard; gabled dormers with bargeboard and arched window; 1/1 sash; stone sills and lintels; porch has bracketed cornice and chamfered columns ornate brackets; double, glazed and panelled doors and transom; good cond.
	197	c. 1880	Two-story, three-bay brick residence with patterned slate mansard roof; gabled dormers with bargeboard; bracketed cornice and plain frieze; 2/2 sash; French windows; stone lintels and sills; two three-story bays on north elevation; transom, double, glazed and panelled doors; good condition; contributing carriage house.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u>		
	201	c. 1880	Two-story, three-bay brick residence with mansard roof; gabled dormers with bargeboard; bracketed cornice; decorated frieze; 2/2 sash; stone lintels and sills; double, glazed and panelled doors; porch has turned chamfered Stick style railing.
	203-205	c. 1870	Three-and-one-half-story, three-bay residence; clipped and cross-gabled roof; brick on facade and stuccoed on sides; 6/6 and 2/2 windows; stone sills and decorative lintels; first-story windows and doors boarded up; transom; exposed rafters on all cornices; three-story, three-sided bay with panelling and bracketed cornice; stone stairs with old cast-iron railing; good condition.
	203-205 Rear (on South St.)		One-story, one-bay, clapboarded garage; gabled roof; glazed and panelled garage doors;
	207-215	c. 1858	Calvary Presbyterian Church: stone structure; gabled roof; corner three-and-one-half-story tower has broad spire, pointed-arch windows, belt course; vertical board doors; pointed-arch stained-glass windows; good condition.
	217-241	1702-	Old Town Cemetery
	243	c. 1855	Two-and-one-half-story, three-bay residence; gabled roof; asbestos siding; 1/1 sash; glazed and panelled door with sidelights; portico with hipped roof, turned spindles, brackets and pendants; good condition.
	245-245A	c. 1885	Three-story, four-bay brick double residence; stone facade; flat roof and bracketed cornice; two full-height, rounded bays with stone balustrade; stone sills and lintels, water table; stone landing with cast-iron rail; glazed and panelled doors, recessed behind arched openings with stone segmental arches; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	Grand Street		
247		c. 1855	Three-story, two-bay, brick residence; low-pitched roof with bracketed cornice; two-story, five-sided, frame bay with panelling; single and triple 1/1 windows; portico with chamfered columns and brackets; double, glazed and panelled doors; good condition.
249		c. 1900	One-story, multi-bay, brick commercial structure; flat roof; glazed and panelled and garage doors; good condition.
259 Rear		c. 1860	One-story, three-bay, brick church school; gabled roof; gabled vestibule; pointed-arch, narrow windows; double doors are pointed-arch; good condition.
259		c. 1865	One-story, multi-bay stone church; slate gabled roof; smaller stuccoed projecting gabled bay has pointed, arched windows; entry in vestibule in rear cross section; buttresses on sides; good condition.
261-65		c. 1870	Two-story, seven-bay, brick triple house with patterned slate mansard roof and raised basement; hooded dormers; three full-height five-sided bays, bracketed cornice and panelled frieze; 2/2 and 1/1 sash; stone water table, lintels and sills with twisted rope-type trim; two-story section on south elevation of 261 has shed-type roof; double, glazed and panelled doors with transoms; stone landings with cast-iron railings; non-contributing garage.
267 - 69		c. 1860	Two and one half-story, six-bay, brick double house; low-pitched gable roof and bracketed cornice; arched, paired gable windows; 1/1 windows with arched lintels and stone sills; double, glazed and panelled doors; brownstone landings with cast iron railings; raised basement with stone water table; north elevation has one-story, five-sided bay with bracketed cornice; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u>		
	271	c. 1870	Two-story, three-bay residence with mansard roof; tarpaper siding; bracketed cornice and denticulated frieze; pedimented dormers; 1/1 windows with heavy wood lintels; encircling classical porch has Tuscan columns and straight balusters; glazed and panelled door with sidelights; good condition.
	275	c. 1870	Two-story, three-bay, brick residence with raised basement and polychrome slate mansard roof; hooded dormers; bracketed cornice and panelled frieze; 2/2 windows with Tudor arches and labels; brick belt course and water table; double, glazed and panelled doors, transom with ogee arch and label; landing has cast iron stair rail; good condition; non-contributing garage.
	277	c. 1900	Four-story, three-bay, brick residence with raised basement; flat roof, bracketed cornice, simple architrave frieze; 9/1 windows; straight brick lintels with stone keystones and stone sills; water table; glazed and panelled door, fanlight; arched door surround with keystone; gabled portico with returns, dentils and Tuscan pilasters; landing with cast iron railing; good condition.
	279	c. 1870	Two-and-one-half-story, three-bay brick residence with full basement; gabled roof with cross gable; oculus and arched 1/1 windows; arched brick lintels and stone sills; shallow second story bay with gable; brick belt course and stone water table; double, glazed and panelled door; gabled portico with shingled pediment, turned spindles and heavy brackets; good condition.
	281	c. 1900	Four-story, two-bay, brick residence; flat roof with parapet; paired and tripartite 1/1 and 9/1 windows; stone sills and lintels; square and diamond shape decorative cement panel near top; recessed entry has stone label and stairs leading up into building; second story oval window with keystone; good condition.
	283	c. 1845	Two-and-one-half-story, three-bay residence; clapboarded; low-pitched gable roof, bracketed cornice and panelled frieze; 1/1 and eyebrow windows with decorative grilles; two-story high pilasters; panelled door with narrow transom and pilasters; porch has lattice columns and balustrade; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u>		
	287 - 89	c. 1870	Two-story, four-bay double residence with mansard roof; gabled and flat dormers; bracketed cornice and panelled frieze; 2/2 sash; double, glazed and panelled doors; transoms; asbestos siding; shed-type and flat-roofed porticos with bargeboard or denticulated cornice new columns and balustrade on one and turned members on other; two-story, five-sided bay with panelling.
	291	c. 1855	Two-and-one-half-story, four-bay residence; gabled roof with cross gable; bracketed cornice; 6/1 windows, stone sills and lintels; double, glazed and panelled doors; wood landing with straight balusters; stone water table and raise basement; contributing carriage house.
	295	c. 1875	Two-and-one-half-story, four-bay residence; asbestos siding; gabled roof with cross gable and decorative "stick" work; 2/2 windows, one with shed roof; two-story, three-sided bay with panelling; glazed and panelled door; gabled hood with "stick" work decoration; wooden stairs and landing with turned balusters; non-contributing garage.
	297	c. 1870	Two-story, three-bay, brick residence with mansard roof and raised basement; hooded and pedimented dormers, bracketed cornice and ornate frieze; arched 2/2 windows with decorative stone lintels, arched pediment over glazed and panelled door; encircling, bracketed porch with turned balusters; one-story square bay; contributing carriage house; (See 402 Liberty St.)
	317	c. 1870	Two-story, four-bay, brick residence with mansard roof and raised basement; hooded dormers and bracketed cornice; arched 1/1 windows with decorative lintels; belt course; bracketed porch with turned balusters; arched double, glazed and panelled doors with transom; contributing carriage house.
	333	c. 1860	Two-and-one-half-story, five-bay residence with hipped roof and gabled roof; stuccoed; 1/1 windows; bracketed cornice and frieze; classical porch with turned members; glazed and panelled door; non-contributing garage.
	335	c. 1890	Two-and-one-half-story, four-bay, brick residence; hipped roof with polygonal dormer; massive tower with conical roof, dormers and decorative brickwork; 1/1 windows, some arched; stone sills and lintels and water

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u> 335 (cont'd.)		table; arched double, glazed and panelled doors; main roof extends down to form a shed-type roof on top of a second story porch with shingling and turned columns; main porch has turned members and straight balusters; good condition.
345		c. 1905	Two-and-one-half-story, multi-bay residence; gabled roof with triple window dormer; shingling on second story, brick on first; 1/1 windows; front flat roof extends over glazed porch; three-sided shingled brick bay; glazed and panelled door; good condition.
355		c. 1900	Two-and-one-half-story, four-bay residence; shingled on top two stories and stone on first; gambrel roof with end to street; Palladian-type window with keystone; two three-sided shallow bays with leaded glass; entry at canted corner has panelled door, sidelights and transom; rounded, classical porch has stone railing; good condition.
363		c. 1940	Two-story, four-bay aluminum-sided residence; gabled roof; paired and singled 6/6 and 8/8 windows; enclosed porch; south elevation has shed-type roof extending over two three-sided bays and entry with glazed and panelled door; non-contributing.
369		c. 1890	Two-and-one-half-story, four-bay residence; stone first and brick second story; cross-gabled roof, shingled gable ends; crest rail, recessed porch; tripartite gable window; one-story and two-story bays; two-tier porch with turned balustrade and denticulated cornice; Doric columns on stone piers; 1/1 sash; stone lintels and sills; glazed and panelled door; ornate porte-cochere on the north elevation.
375		c. 1905	One-and-one-half-story, five-bay residence; stuccoed and aluminum sided; gambrel roof; dormers with half-timbering; double doors; tripartite window with lattice-type wood work and stained glass panel above; oval, paired 6/1 windows; glazed and panelled door; contributing stuccoed garage.
379		c. 1905	Two-and-one-half-story, five-bay residence; gambrel roof with dormer; shingled; single or triple 6/1 windows; glazed and panelled door; leaded sidelights, elaborate door surround with broken pediment and denticulate

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u> 379 (cont'd.)		cornices; three-sided frame bay; second story flared; porch has denticulated cornice, Tuscan columns and new railing; good condition. contributing garage.
	383	c. 1915	Two-story, three-bay, brick residence; hipped roof; bracketed cornice; quoining; 8/1 windows; new flushboard door, sidelights, arched transom, brick-quoined door surround; one-story, flat-roofed section with recessed brick panels and quoining; good condition.
	403	c. 1890	Two-and-one-half-story, three-bay residence; gambrel roof with cross gable and gable dormers; 1/1, 9/1 and nine-light windows; top two stories are shingled; bottom story is coursed stone; porch has paired round columns on shingled piers with straight balusters; oval window with four keystones; three-sided frame bay on second story; glazed and panelled door with sidelights having tracery; contributing garage.
	405 - 407	c. 1890	Two-story, four-bay brick double residence with flared mansard roof; stepped gable ends; eyelid dormer; three-sided frame bay on second story; arched and rectangular windows; one enclosed porch with pedimented gable; one with paired rectangular posts on brick piers and turned balusters; altered entries.
	409	c. 1890	Two-and-one-half-story, three-bay, brick residence; double, hipped, shingled roof; wormer with clipped gable; triple 1/1 and stained glass windows; three-sided, one-story frame bay with stained glazed and panelled door; panelled porch with square posts on stone piers; decorative chimney; good condition. non-contributing garage.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u>		
	415	c. 1890	Two-and-one-half-story, three-bay brick and stone residence; gabled roof; hipped dormers with flared eaves; bracketed cornice; round frame bay on second story; stained glass and 1/1 windows; glazed and panelled door; arcaded porch has posts on stone piers, turned balusters; non-contribut. garage
	419	c. 1910	Two-and-one-half-story, three-bay, stuccoed residence; hipped roof and dormers; 4/1 and 6/1 windows; one-story bay on south elevation; glazed and panelled door with sidelights; porch has stuccoed posts on brick piers and vase-shaped balusters; brick-quoined window and door surrounds; good condition. contributing garage.
	427	c. 1840 c. 1857	Two-and-one-half-story, three-bay, clapboarded residence; gambrel roof with clipped ends; shed dormer; 6/1 and diamond-paned windows; arched and panelled double doors; enclosed classical porch with turned balusters; decorative hoods and porches on south elevation; very good condition. nc-g
	4	c. 1870 c. 1890	Two-story, three-bay, brick residence with patterned slate mansard roof; flat-roofed dormer with pilasters; false brick tower with mansard roof; 1/1 windows with arched lintels and stone sills; canopy with crest rail, slate mansard roof, panelled pediment, decorative frieze, glazed and panelled doors, transom, bracketed cornice, panelled frieze; encircling rear porch is Eastlake style; good condition.
	6	c. 1870	Two-story, three-bay, brick residence with slate patterned mansard roof; hooded dormers; 2/2 and 1/1 windows with straight lintels and stone sills; bracketed cornice and panelled frieze; three-tier porch in rear; canopy with crest rail, patterned slate mansard roof, brackets; double, glazed and panelled door with transom; heavy cast iron railing, good condition.
	8	c. 1870	Two-story, two-bay, brick residence; patterned slate mansard roof; gabled dormer with arched window and fluted pilasters; bracketed cornice; two-tier porch in rear; arched window and entry with massive brick lintels; doorway has panelling around glazed and panelled door; right side has gabled dormer with panelling and tripartite windows and bracketed overhang.

EAST END HISTORIC DISTRICT, NEWBURGH, ORNAGE COUNTY, NEW YORK

<u>PHOTO# :</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u>		
10		c. 1870	Two-story, five-bay brick residence with patterned polychrome slate mansard roof; hooded dormers, bracketed cornice and panelled frieze; 2/2 windows; arched lintels with plain drip courses; double, glazed and panelled door with transom; good condition.
12		c. 1840	Three-story, two-bay, brick residence with raised basement; flat roof; bracketed cornice and plain frieze; 1/1 and 2/1 windows; stone sills and lintels; three-story, five-sided bay; entry has arched stone label; double, glazed and panelled door with transom and panelled vestibule; good condition.
14		c. 1840	Three-story, two-bay, brick residence; flat roof, bracketed cornice and straight rope-type trim on frieze; 1/1 windows; rock-faced stone sills and lintels; three-story round bay; double, glazed and panelled doors; good condition.
42		c. 1930	Four-story, three-bay, brick commercial/residential building; flat roof with metal band at top; 1/1 windows with stone sills; storefront is plain carrara glass and projects from main block; indications of alterations on facade represented by different colors of brick; good condition.
46 - 52		c. 1915	Substantial three-story, three-bay, brick building; flat roof with balustrade; classical entablature with Masonic Temple written on it; two-story, engaged Roman columns; vertical recesses embrace second and third story windows; above latter are panels; French doors open onto balconies; 1/1 windows; first story is dressed stone with central entry flanked by windows, pediment above double, glazed and panelled doors with transom; stone quioning; good condition.
54		c. 1913 1840	Three-story, five-bay, brick institutional structure; flat roof with stone band at top; brick panelling, modillion cornice and denticulated frieze; stone belt course with "Young Men's Christian Association"; 8/8 windows with straight brick lintels and



EAST      END      HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u> 54 (cont'd.)		stone keystones; central second story window has ornate entablature; first story central entry with denticulated pediment, panelled frieze, fluted pilasters, new door, stone steps with two lamp posts; flanking entry are tall arched, multi-paned windows with brick labels with keystones and balconies; attached to Greek Revival period house
60 -62		c. 1935	One-story, three-bay, <sup>2<sup>d</sup></sup> stone institutional building; arched and recessed entry with stepped false front; 6/9 and 6/6 windows in brick surrounds; coursed basement; good condition. (American Legion)
94		c. 1850	Three-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 and 2/2 windows; stone sills, lintels and water table; double, glazed and panelled doors; good condition.
96		c. 1850	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels and water table; double, glazed and panelled door with transom; gabled canopy with sunburst panel in pediment, denticulated frieze and heavy braces; good condition.
98		c. 1870	Two-story, three-bay, brick residence with polychrome patterned slate mansard roof; hooded dormers, bracketed cornice and panelled frieze; 2/2 windows; arched lintels, stone sills and water table; arched transom, new double, glazed and panelled doors; brown-stone landing with cast iron railing; large first story window with arched transom; good condition.
100 - 102		1876	Two-story, three-bay, brick institutional building; flat roof; iron bracketed cornice; balustrade above cornice has piers and pinnacles; in center is round arch with "City Library" and "1876"; double windows with cast-iron columns between segmental arches with keystone, flanked by pilasters with stone capitals; new glass and metal doors, arched transom, keystone; ornate porte-cochere with paired, round columns arcading between.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u> 120	c. 1855	Two-story, three-bay, brick institutional building with flared mansard roof; panelled dormers and bracketed cornice; 1/1 windows embraced by stone pilasters; belt course with cornice and frieze; stone water table; panelled door with transom; brownstone landing; recessed brick panels on facade; round frame bay on south elevation; fire damaged.
	124 - 138	c. 1974	Two-story, multi-bay institutional structure; stone with bands of glass; large plaza in front; steps lead down to first story; Newburgh Public Library.
	150	1835; 1867	Greek Revival Temple format with classical pediment and columns; stucco and stone; all windows boarded up; Dutch Reformed Church.
	152 - 154		Two-story, four-bay brick double commercial/residential building with slate mansard roof; gabled dormers with panelling; one five-sided and one rounded two-and-one-half-story bay; bracketed cornice and panelled frieze; stained glass windows; 1/1 sash; encircling porch with crest rail, cornice, round columns with elaborate capitals, turned balusters; double, glazed and panelled doors with transom.
	156 - 158	c. 1895	Two-story, four-bay, brick double house with slate mansard roof; gabled and shed-type dormers; 1/1 and stained glass windows; shingled and panelled gable over square bay with recessed panels and cast iron columns; bracketed cornice; frame, four-sided, second story bay; porch has crest rail, bracketed cornice, ornate columns, turned balusters; glazed and panelled door with pilasters; good condition.
	160	c. 1835	Two-and-one-half-story, five-bay, clapboarded residence; gabled roof with pedimented dormers; 6/6 windows; classical porch with Tuscan columns and turned balusters; door surround embraces sidelights and panelled door; fair condition.
	162	c. 1900	Two-one-half-story, two-bay brick residence with asphalt siding; gambrel slate roof; gambrel ends shingled; wide slate shingled dormer with polygonal roof; two rounded frame bays on second story have panelling; first story: square panelled bay, recessed, arched entry with stone columns on brick base; glazed door.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u>		
	164	c. 1900	Two-and-one-half-story, two-bay residence; brick; gabled slate roof with cross gable and hipped dormer; oval, 12/1 and 6/1 windows; full-height, rounded bay, stone belt courses and water table; recessed arched entry with glazed and panelled door flanked by wide sidelights; good condition.
	168	c. 1900	Two-story, four-bay, brick residence with patterned slate mansard roof; bracketed cornice and panelled frieze; flat-roofed and mansard dormers; 1/1 windows; second story, five-sided, frame bay topped by tower; porch has turned spindles, chamfered columns and balusters, ornate brackets; double, glazed and panelled doors with stained glass; good condition,
	170	c. 1880	Three-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 2/2 windows; stone sills, lintels and water table; double, glazed and panelled doors with transom and panelled entry; wood landing with turned balusters; good condition.
	172	c. 1880	Three-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; five-sided, three-story bay; 1/1 windows; stone sills, lintels and water table; transom, new panelled door; panelled entry; good condition.
	174	c. 1880	Three-story, two-bay, brick commercial/residential building; flat roof and bracketed cornice; 2/2 windows; arched lintels and stone sills; door adapted to a window; altered windows; raised basement with entry; panelled door with new sidelights; good condition.
	176	c. 1880	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; arched lintels, stone sills and water table; double, glazed and panelled doors with transom, panelled entry; brownstone landing with cast iron railing good condition.
	178	c. 1945	Two-story, two-bay, brick residence; gabled roof with returns; single and double 6/1 windows; three-sided bay on first story; classical porch has Tuscan columns and straight balusters; glazed and panelled door with fanlight and sidelights; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u>		
180		c. 1855	Two-story, three-bay brick residence with polychrome slate mansard roof; gabled dormers with bargeboard; projecting gabled bay with bargeboard oculos window and recessed porch on second story; paired 4/4 windows; smooth stone labels; one-story bay with balustrade on south elevation; good condition.
180 Rear		c. 1855	Two-story, three-bay, brick carriage house; gambrel roof; glazed and panelled door; loading door and modern garage door; arched roof outbuilding.
186		c. 1940	One-and-one-half-story, one-bay stone and brick church; slate gabled roof with cross gables; facade is gable end with arched windows; dressed stone gabled vestibule with arched opening; recessed entry has glazed and panelled doors; buttresses on sides; non-contributing.
196		c. 1850	Two-and-one-half-story, three-bay brick residence; low-pitched gabled roof with cross gables; exposed rafters; one-story, frame bay with panelling and exposed rafters on first story; arched 3/3 and 6/6 windows; radiating voussoirs and recessed stone sills and water table; recessed, panelled entry with sidelight and panelled door; brick belt course; good condition.
196 Rear		c. 1850	One-and-one-half-story, two-bay, brick garage; gabled roof; second story, louvred door; two panelled garage doors; good condition.
200		c. 1855	Three-story, six-bay, brick residence; low-pitched gable roof; bracketed cornice and panelled frieze; 1/1 windows; brick lintels and stone sills and water table; first story windows are French; old cast iron fence brownstone landing with old cast iron stair rail; entry has slate mansard hood with crest rail, spindles, heavy brackets with bargeboard; double, glazed and panelled inner and outer door; good condition.
202		c. 1855	Three-story, three-bay, brick residence; low-pitched gable roof, bracketed cornice and panelled frieze; 1/1 and 2/2 and French windows; straight lintels, stone sills and water table; second story square bay with denticulated cornice, shingles and brackets; double, glazed and panelled doors; brownstone landing and stairs; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u>		
204		c. 1855	Three-story, three-bay, brick residence; flat roof and bracketed cornice; stone water table, sills and lintels; 1/1 sash French windows; transom and double, glazed and panelled doors; brownstone landing with cast-iron railing.
206		c. 1855	Three-story, three-bay, brick residence; flat roof, bracketed cornice and plain frieze; obscured windows have straight stone lintels and sills; first story has arched labels with drip courses and stone sills; door obscured; stone landing has cast-iron stair rail.
206 Rear (on South St.)		c. 1905	One-story, two-bay concrete block garage flat roof with stepped parapet; glazed and panelled garage doors; non-cont.
228-228A		c. 1885	Three-story, four-bay, brick double residence; low-pitched gable roof; raised basement of coursed stone and rock-faced stone water table; bracketed cornice and rope-type trim on frieze; 1/1 sash; some arched windows with labels; two two-story round bays; glazed and panelled doors; stone landings with cast-iron railings.
232		c. 1846	Three-story, three-bay coursed, stucco residence; gabled roof and boxed cornice and plain frieze; panelled facade; 1/1 sash; stone or stucco lintels and stone sills; two-story pilasters; glazed and panelled door; non-contributing garage.
234		c. 1885	Three-story, two-bay, brick residence; low-pitched gabled roof, bracketed cornice and frieze with garland design; 1/1 sash; straight brick lintels and rock-faced stone sills; round, three-story bay; double, glazed and panelled door; contributing garage.
236		c. 1870	Three-story, three-bay, brick residence; flat roof with deeply projecting cornice and rafters; 2/2 sash; stone sills and lintels; double, glazed and panelled doors; classical overdoor.
238-240		c. 1870	Two-story, four-bay, brick double residence; polychrome, patterned slate mansard roof; bracketed cornice; gabled mansard dormers; glazed and panelled doors; transoms; corner porticos with spindles, chamfered columns and brackets; two two-story bays with square sections; 1/1 sash

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u>		
	244	c. 1855	Two-and-one-half-story, three-bay, brick residence; low-pitched gabled roof with cross gables, bracketed cornice, panelled and arcaded facade; 2/2 windows; stone sills and lintels with keystones or twisted rope-type trim; brick belt course; double, glazed and panelled doors with transom; good condition.
	246	c. 1880	Two-story, three-bay, brick residence with polychrome patterned slate mansard roof; bracketed cornice and panelled frieze; 1/1 and French windows with stone sills and lintels; square tower with flat roof, bracketed cornice and panelled frieze; transom and double, glazed and panelled doors; classical porch has straight posts and balusters; good condition.
	248	c. 1855	Two-story, two-bay, brick residence with patterned slate mansard roof; bracketed cornice and panelled frieze; hipped dormers with panelling; five-sided, two-and-one-half-story bay; 2/2 windows; stone sills and lintels; classical porch with turned balusters; double, glazed and panelled doors; good condition. contributing carriage house
	264 A	c. 1950	One-story, one-bay, brick modern garage; gabled roof; oculos window; glazed and panelled garage door; good condition.
	264	c. 1865	Two-story, three-bay, brick residence with polychrome slate mansard roof; gabled dormers with bargeboard and central projecting gabled section with bargeboard; window with polychrome, arched label, double, panelled door with arched transom and similar label with keystone; belt course; 2/2 windows; stone sills and lintels; exposed rafters; good condition.
	266	c. 1870	Two-story, three-bay, brick residence with polychrome mansard roof; hooded dormers; bracketed cornice and panelled frieze; 2/2 windows; arched lintels with keystone and smooth stone sills; arched, transom and double, glazed and panelled doors; arched labels with drip courses; encircling porch has molded cornice, grouped Tuscan columns, turned balusters; good condition.

EASR    END    HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u>		
268		c. 1870	Two-story, three-bay, brick residence with patterned slate mansard roof; hipped dormers with pilasters, bracketed cornice and panelled frieze; 2/2 windows; stone sills and lintels with twisted rope-type trim; north elevation has five-sided, one-story bay with bracketed cornice; brownstone door surround with double, glazed and panelled doors; good condition.
282		c. 1840	Two-and-one-half-story, three-bay stuccoed brick residence; low-pitched gabled roof, plain cornice and frieze; eyebrow windows with horizontal band beneath; 6/6 sash; portico has denticulated cornice, Tuscan columns and straight balusters; panelled door with sidelights and transom.
284		c. 1840	Three-and-one-half-story, three-bay residence; gabled roof with returns; large cupola with flat roof and chamfered posts; stuccoed top two stories and permastone first story; bracketed cornice and panelled frieze; 1/1 windows; straight and pedimented lintels and stone sills; brownstone landing and cast iron railing; glazed and panelled doors with transom, pediment with panelling and brackets; good condition.
286		c. 1885	Four-story, two-bay brick residence; flat roof; molded cornice and panelled frieze; three-sided frame bay on second and third stories has flat roof and cornice and elaborate panelling; 1/1 sash windows with stained glass and leaded transoms; decorative brickwork; double glazed and panelled doors; stone cornice and frieze above first story.
288		c. 1840; c. 1895	Two-story, three-bay, stone residence with slate mansard roof; hipped and gabled dormers, bracketed cornice; two-story porch with balustrade; grouped Doric columns, turned balusters, new door with sidelights and arched glazed and panelled doors; round tower with battlements; 1/1 windows; numerous chimneys; good condition.
296		c. 1905	Two-story, two-bay, brick residence with slate mansard roof; hipped dormers are panelled; bracketed cornice, single and tripartite 1/1 windows with brick lintels with keystones; belt courses; arched transom and double, glazed and panelled doors; arched label with keystone; good condition.

## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u>		
	298	c. 1900	Two-story, three-bay, brick residence with slate mansard roof; gabled dormer; asbestos siding and permastone; left side has tower with polygonal slate roof, bracketed cornice and panelled frieze; two and one half-story projecting gabled bay with arched, recessed portico; 1/1 windows; new, glazed and panelled door; good condition.
	302	c. 1900	Two-and-one-half-story, three-bay residence; stuccoed second story, brick first story; gabled roof; entry in brick vestibule with cement landing and new railing; French doors; good condition.
	304	c. 1950	One and one half-story, three-bay, modern, brick residence; gabled roof with cross gables entry with arched label with keystone and arched door; 6/1 paired and single windows; excellent condition. <del>non-contributing.</del>
	312	c. 1945	Two-story, three-bay, modern residence; gabled roof; clapboarded second story and stone-faced first story; casement windows; projecting vestibule with vertical board door and broken pediment; attached garage with modern glazed and panelled doors; good condition. non-contributing.
	314	c. 1885	Two-story, two-bay, brick residence with slate mansard roof; gabled romers with half timbering; paired 1/1 windows; stone sills and lintels; classical porch has Tuscan columns and board railing; double, glazed and panelled doors with transom; side elevations have projecting, frame bays; good condition.
	316	c. 1915	Two-and-one-half-story, three-bay residence; aluminum sided; gambrel roof with shed-type dormer; single and triple 6/1 windows; stained glass sidelights and panelled door; portico has arched roof, Doric columns; good condition.
	318	c. 1900	Two-and-one-half-story, two-bay, brick residence; gabled roof with shingled cross gable; three-sided, two-story bay with conical slate roof; decorative chimneys; 1/1 windows with stone sills and lintels; encircling porch has plain frieze and cornice, turned columns and replacement posts; second story porch atop; glazed and panelled doors; transom; good condition.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u>		
	322	c. 1900	Two-story, three-bay, brick residence with stone facade; slate mansard roof; gabled dormers one with Palladian-type window; 1/1 sash; stone lintels and sills; one-story squared bay with balustrade atop; recessed entry with round segmental stone arch and glazed and panelled door.
	324	c. 1920	Two and one half-story, four-bay residence; shingled and brick; gabled roof with shingled gabled dormer; single and double and triple 1/1 and casement windows; glazed and panelled door with sidelights, transom and hood; good condition.
	342	c. 1915	Two-and-one-half-story, three-bay shingled and brick residence; gabled roof; massive central bay with gable roof; casement windows; entry has twin panelled doors, enclosed transom and pediment with enclosed fanlight.
	346	c. 1920	Two-and-one-half-story, three-bay, brick residence; hipped roof and hipped dormer; 6/1, 8/1 and 4/1 windows, transom, sidelights and panelled door; portico has grouped Tuscan columns and balustrade, straight wood railing on steps; one-story, flat-roofed sun porch on south elevation; good condition.
	348	c. 1915	Two-and-one-half-story, three-bay residence; hipped roof with hipped dormers; stuccoed top stories and brick first story; panelled door; portico has brick posts, balustrade atop squared bay; two three-sided bays; 1/1 windows; original sun porch; good condition.
	350	c. 1915	Two-and-one-half-story, three-bay residence; clapboard-sided second story and stuccoed first story; gambrel roof; wide shed-type dormer; 6/1 sash; arched portico with lattice work sides; panelled door and sidelights.
	356	c. 1915	One-and-one-half-story, three-bay residence; gabled roof; wide shed-type dormer; aluminum-sided and stone facing; 1/1 windows; vestibule with shed-type roof; glazed and panelled door with fanlight in top third story; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u>		
358		c. 1915	One-and-one-half-story, three-bay residence; aluminum siding; gabled roof; wide shed-type dormer; gabled vestibule; 1/1 windows and casement windows; good condition.
360		c. 1915	Two-story, three-bay residence; shingled; gabled roof; paired casement and central Palladian-type window; three-sided bay and glazed vestibule; good condition.
362		c. 1915	Two-and-one-half-story, three-bay aluminum sided residence; gambrel roof; single or triple 6/6 windows; panelled door with sidelights; pediment over entry has sunburst panel; good condition.
368		c. 1915	One-and-one-half-story, three-bay residence; gambrel roof; vinyl-sided; shed-type dormer; 9/1 windows; glazed and panelled door with sidelights; pedimented portico with Tuscan columns; good condition.
372		c. 1915	Two-and-one-half-story, three-bay, shingled residence; hipped roof with hipped dormer; portico with flared posts on shingled railing; glazed and panelled door with sidelights; two square bays with balustrades atop, tracery in windows; paired 3/1 windows; one-story sun porch section with balustrade atop; good condition.
378		c. 1915	Two-story, three-bay residence; stuccoed; gabled roof with gabled dormers; two square one-story bays, windows have tracery; glazed, gabled vestibule; glazed and panelled door; one-story sun porch; good condition.
380		c. 1915	One-and-one-half-story, two-bay residence; gambrel roof; aluminum siding; wide shed-type dormer; 6/1 windows; glazed vestibule; glazed sun porch; good condition.
388		c. 1810	Two-and-one-half-story, five-bay residence; clapboarded; gabled roof, cornice and gable ends are bracketed; 6/6 windows with heavy overwindows; leaded transom and sidelights; classical porch with Tuscan columns; straight balusters; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Grand Street</u>		
	392	c. 1915	Two-and-one-half-story, three-bay residence; shingled; gabled roof; shed-type dormer; singled and paired 6/1 windows; glazed and panelled door with sidelights; fanlight with tracery; arched hood; bracketed cornice; good condition.
	396	c. 1915	Two-and-one-half-story, two-bay residence; hipped roof with hipped dormer; shingled second story and brick first story; portico with brick posts and railing; glazed and panelled door; 1/1 windows; squared, canted bays with hipped roofs; good condition.
	400	c. 1915	Two-and-one-half-story, two-bay residence; 1/1 and 2/2 windows; second story, shingled, flared at bottom; first story brick and rock-faced cinder block; three-sided bay recessed, corner porch; glazed and panelled door; good condition.
	404	c. 1915	Two-and-one-half-story, three-bay residence; gabled roof with cross gable; flared second story, asbestos siding and first story shingled; 8/1 and 2/1 windows; panelled door; porch has square posts and balusters, brackets; first story, three-sided bay; glazed and panelled door; good condition.
	404 Rear (on Nicoll St.)	c. 1915	One-story, one-bay; shingled garage; flat roof; glazed and panelled garage door; good condition.
	406	c. 1900	Two-and-one-half-story, three-bay residence; gambrel roof with shed-type and hipped dormers; aluminum-sided; second-story, three-sided bays; 1/1 windows; some with tracery; glazed and panelled door with transom and sidelights; porch has panelled square posts and turned balusters; good condition.
	420	c. 1900	Two-and-one-half-story, six-bay residence; shingled top stories and cobblestone bottom; hipped roof with cross gables; three-sided bay paired and single 1/1 and stained glass window; glazed vestibule; porch has grouped Tuscan columns, stone chimney on facade, round cobblestone bay; good condition.
	420 Rear (on LeRoy Place)	c. 1900	One-story, three-bay stone garage; gabled roof, panelled doors; good condition.

## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Henry Avenue</u>		
9		c. 1890	Two-and-one-half-story, two-bay asbestos-sided residence; gabled roof with cross gables; arched gable windows; 1/1 windows; three-sided, two-story bay on facade; porch with denticulated frieze; Tuscan columns and straight balusters; two glazed and panelled doors off porch; good condition.
11		c. 1890	Two-story, three-bay, brick residence; flat roof, molded cornice and panelled frieze; 1/1 windows; rounded second story bay with denticulated frieze and panelling; porch has frieze; Doric columns atop panelled piers, straight balusters; double window with panelled arch atop; glazed and panelled door with stained glass transom; good condition.
15		c. 1905	Two-and-one-half-story, three-bay residence; hipped roof with hipped dormers; clapboarded; triple and double 6/1 and 1/1 windows; double, glazed and panelled doors; porch has Tuscan columns and straight balusters; good condition.
17 - 19		c. 1890	Two-story, four-bay, brick double house; flat roof; bracketed cornice and panelled frieze; 1/1 windows; stone lintels and sills; double, glazed and panelled doors; left two-story bay is three-sided and right one is square; glazed and panelled doors; porch has bracketed cornice, turned spindles and columns, cutwork brackets, straight and turned balusters; good condition.
21		c. 1890	Three-story, two-bay residence; asbestos siding; flat roof, bracketed cornice and panelled frieze; 1/1 windows; three-sided, three-sided bay with panelling; double, glazed and panelled doors; porch has denticulated cornice, cutwork brackets, turned columns atop asbestos-sided railings, pediment with sunburst panel; good condition.
23 - 25		c. 1890	Two-story, four-bay, brick double residence; slate patterned mansard roof; gabled dormers with sunburst cutwork; two-story, three-sided bays with decorative brickwork and terracotta panels; porches have denticulated or bracketed cornices, Tuscan columns, turned balusters, double, glazed and panelled door

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Henry Avenue</u>		
	27	c. 1890	Three-story, three-bay residence with asbestos siding; flat roof and plain cornice; 1/1 windows; encircling porch with denticulated cornice, round columns with foliated capitals and turned balusters; northwest corner has canted, squared bay; good condition.
	45 - 45A	c. 1890	Large two and one half-story, seven-bay brick building, slate roof, hipped roof; irregular mass, gable ends shingled; bracketed cornice; tower with conical roof, shingled third story; 1/1 windows; stone lintels; east elevation has large cross gable forms porch with large arched opening; encircling porch has Tuscan columns and turned balusters; pedimented gabled dormer, two-story bay with tower-like porch on third story on north elevation; attached one-story, two-bay garage with new door; good condition.
	47	c. 1890	Two-story, two-bay brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two-story, five-sided bay; double, glazed and panelled doors; portico altered with new cast iron and metal; good condition.
	49	c. 1890	Two-story, three-bay residence; tarpaper siding with aluminum sided facade; multi-gabled roof with gable returns; new 1/1 windows; three-sided bay on first story; corner porch has turned spindles, columns and balusters; good condition.
	51	c. 1890	Two-story, two-bay brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 windows with stone sills and lintels; two-story, five-sided bay; entry and portico altered with new cast iron and metal; good condition.
	53	c. 1890	Two-story, three-bay brick residence; flat roof and denticulated cornice; 1/1 windows with stone sills and lintels; three-sided bay on second story has denticulated cornice; porch has Tuscan pilasters on shingled piers; large first-story window; glazed and panelled door, good condition.
	55	c. 1905	Two-story, two-bay clapboarded residence; hipped roof; 8/1 windows; wooden "belt course" glazed and panelled door with sidelights; portico has hipped roof, square posts on piers and altered railing; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Henry Avenue</u>		
57		c. 1890	Two-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; full-height, rounded bay; 2/2 and 1/1 windows with stone sills and lintels; glazed and panelled door; altered portico retains dentils and spindles; good condition.
59		c. 1910	One-story, two-bay garage; clapboarded; hipped roof; original glazed and panelled garage doors; non-contributing.
61		c. 1890	Two-and-one-half-story, four-bay tarpaper sided residence; multi-gabled slate roof, pediments and bracketed cornice; front gable has sunburst pattern; canted, square bay and tower on north east corner has flat roof; bracketed cornice and glazed third-story porch; narrow 1/1 windows; double, panelled doors with transom; porch has turned members and pediment with sunburst panel; good condition.
65		c. 1890	Two-and-one-half-story, four-bay residence with cross gabled slate roof; new 1/1 windows; encircling porch has square posts with cutwork brackets and turned columns; good condition.
67		c. 1890	Two-story, two-bay, brick residence; flat roof and panelled cornice and frieze; narrow 1/1 windows with stone sills and lintels; porch has plain cornice, Tuscan columns and straight balusters; panelled door with transom; good condition.
69		c. 1890	Two-story, two-bay residence; "L" shaped gabled roof; asbestos siding; right side with pediment projects; altered corner porch; glazed and panelled door; single and double 1/1 windows; good condition.
69 Rear (on South Lander)		c. 1890	One-story, one-bay garage; clapboarded; gabled roof; glazed and panelled garage doors; windows on sides; good condition.
71		c. 1905	Two-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 windows with stone sills and lintels; second story, shingled bay; porch has Tuscan columns atop shingled railing; double, glazed and panelled doors; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Henry Avenue</u>		
	71A	c. 1905	One-story, three-bay, brick carriage house; stepped parapet; 2/2 windows with raidating voussoirs; glazed and panelled carriage doors; good condition.
	73	c. 1900	Two-story, two-bay brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 windows with stone sills and lintels; two-story, round bay; double, glazed and panelled doors; porch has plain cornice, turned columns atop shingled railing; good condition.
	75	c. 1890	Two-story, two-bay residence with flat roof; asbestos siding; bracketed cornice; 1/1 window two-story bay with flared second story; enclosed porch; good condition.
	77 - 79	c. 1890	Three-story, four-bay, brick double residence; flat roof; aluminum-sided cornice and brackets; narrow windows with stone lintels and sills; 1/1 sash; two round, three-story bays; glazed and panelled doors with transoms; porches have bracketed cornices and turned members.
	81	c. 1905	Two-story, two-bay residence is shingled and clapboarded; hipped roof with hipped dormers; 6/1 windows; glazed vestibule; porch has plain cornice with Tuscan columns atop shingled railing; good condition.
	85	c. 1910	Two-story, two-bay residence; asbestos siding; hipped roof with hipped dormers; 1/1 windows; porch with square posts atop solid balustrade; good condition.
	97	c. 1910	One and one half-story, two-bay residence; aluminum siding; gabled roof with gabled dormer; 1/1 windows; glazed sun porch incorporates Tuscan columns atop shingled railing; good condition; contributing garage.
	99 - 101	c. 1905	Two-story, four-bay double house with aluminum siding; gabled roof with wide cross gable; paired and single 1/1 windows; enclosed porches with central pediments; #101 retains Tuscan columns; good condition.
	8	c. 1905	Two-story, two-bay residence; flat roof; bracketed cornice and panelled frieze; asbestos siding; second story square bay; period sun porch with denticulated cornice; fanlights and Tuscan pilasters; 1/1 windows; good condition.; non-contributing garage.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Henry Avenue</u>		
	10 -161	c. 1890	Four-attached two-story, two-bay, brick rowhouses; flat roof; bracketed cornice and panelled frieze; 1/1 sash; stone belt courses; four rounded, two-story bays; four, glazed and panelled doors; entrances have porticos (only #1 unaltered); crest rail, turned columns and straight balusters.
	18	c. 1890	Two-and-one-half-story, three-bay residence; aluminum siding; multi-gabled roof with polychrome slate; bracketed cornice; tower with pinnacle; pedimented gable with fanlight with stained glass; altered porch has turned columns, new 1/1 windows; panelled door; good condition.
	22	c. 1890	Two-and-one-half-story, three-bay residence; asbestos siding; square tower on third story; flared pyramidal roof with ball atop; corner porch with lattice atop, turned columns and brackets; west elevation has second story bay; panelled door; good condition.
	24 - 261	c. 1890	Two-story, three-bay residence with aluminum siding; gabled roof; square tower with pyramidal roof; west elevation: gabled bay on second story; enclosed porch; windows with multi-paned upper sashes; panelled door; good condition.
	28	c. 1890	Two-and-one-half-story, three-bay residence; gable roof; tarpaper siding; large center bay with octagonal third story roof; 1/1 windows; three-sided porch has cutwork brackets and fielded polygonal columns atop sided railings; panelled door; good condition.
	46	c. 1890	Two-story, three-bay residence with asbestos siding; "L" shaped gabled roof; left side projects with three-sided bay on first story with fan-type brackets; 1/1 windows; enclosed porch; good condition.
	50	c. 1890	Two-and-one-half-story, two-bay brick residence; gabled and gambrel roof, shingled; denticulated frieze; "L" shaped; corner two-tier porch, enclosed on second story, Tuscan columns atop piers on first story; glazed and panelled doors; stone belt course; single double and triple windows with radiating voussoirs and keystones; good condition.
	54	c. 1890	Two-and-one-half-story, three-bay residence; "T" shaped; cross gabled roof; tarpaper and aluminum siding; 1/1 windows; second story,



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Henry Avenue</u>		
	54 (cont'd.)		three-sided bay; porch with turned columns and straight balusters; glazed and panelled door; good condition.
56		c. 1905	Two-story, two-bay residence with gambrel roof; wide shed-type dormer; 6/1 and 2/2 windows; shingled; glazed sun porch; good condition.
58		c. 1890	Two-and-one-half-story,* two-bay "L" shaped residence; cross gabled roof with bracketed pediments; asbestos siding; bracketed cornices; paired and single 1/1 windows; small tower with pedimented roof has pinnacle; first story bay with hipped roof; corner porch has brackets, columns and altered railing; good condition.
60		c. 1890	Two-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 windows with stone sills and lintels; two-story, rounded bay; double, glazed and panelled doors and transom; narrow, arched window with stained glass between entry and bay; good condition.
64 Rear		c. 1905	One-story, one-bay garage; clapboarded; gable roof; glazed and panelled door; good condition; non-contributing.
64		c. 1905	Two-and-one-half-story, two-bay residence with gabled roof; tarpaper siding; 1/1 windows; enclosed sun porch with Tuscan columns atop railing; good condition.
68		c. 1890	Two-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; two-story, three-sided bay; corner porch has turned spindles and columns and altered railing; 1/1 windows with stone sills and lintels; altered door; good condition.
70		c. 1890	Two-and-one-half-story, two-bay "L"-shaped residence; asbestos siding; cross gabled roof with pediments; paired and single 1/1 windows; corner porch with turned columns, fanlike brackets and turned balusters; glazed and panelled door; good condition.
70 Rear (on South Lander)			One-story, two-bay, rock-faced cinder block garage; stuccoed; flat roof; glazed and panelled garage doors; non-contributing.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Henry Avenue</u>		
72		c. 1905	Two-story, two-bay residence; hipped roof with hipped dormer, shingled second story, vinyl sided first; 3/1 windows; enclosed porch with round columns atop railing, fanlights; glazed door with sidelights; good condition.
72 Rear (on South Lander)			One-story, two-bay garage; hipped roof; stuccoed; modern panelled garage doors; contributing.
72½		c. 1890	Two-story, three-bay residence with tarpaper siding; flat roof; bracketed cornice and panelled frieze; 2/2 windows; glazed and panelled door; porch has square posts atop shingled railing; good condition.
74		c. 1890	Two-story, three-bay residence with asbestos siding; flat roof and aluminum sided cornice; 2/2 windows; double, glazed and panelled doors with transom; altered porch; bay on second story, east elevation; good condition.
76		c. 1905	Two-story, two-bay, brick residence; flat roof and bracketed cornice; full-height, three-sided bay with decorative brickwork; 1/1 windows with stone lintels; two-tier porch with turned columns atop shingled railing; double, glazed and panelled doors; good condition.
76 Rear		c. 1905	One-story, two-bay garage with pyramidal roof; rusticated cinder blocks; panelled garage doors; very good condition; contributing.
78		c. 1905	One-story, two-bay garage; clapboarded with hipped roof; glazed and panelled garage doors; good condition.
80		c. 1905	One-story, two-bay garage with novelty siding; gabled roof; glazed and panelled garage doors; good condition.
82		c. 1890	Two-story, three-bay residence; low-pitched gable roof; bracketed cornice and denticulated frieze; asbestos siding; 1/1 windows; porch with Tuscan columns atop shingled railing; glazed and panelled door with transom; good condition.
84		c. 1940	One-story, one-bay garage with flat roof; cinder block; panelled door; non-cont. garage

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Henry Avenue</u>		
	86	c. 1905	Two-and-one-half-story, three-bay residence; vinyl siding; hipped roof with hipped dormers; new 1/1 windows; porch has square posts atop railing; glazed and panelled door; good condition.
	88	c. 1905	Two-and-one-half-story, three-bay residence; pedimented gable roof; aluminum siding; enclosed porch; glazed and panelled door; new 1/1 windows; good condition.
	92	c. 1905	One-story, seven-bay brick garage; sealed windows with radiating voussoirs; one bay altered for regular door; new garage doors; good condition.; contributing
	<u>Johnes Street</u>		
	1	c. 1910	One-story, two-bay, rock-faced garage; flat roof; vertical board garage doors and large 8/8 window; good condition.
	3	c. 1885	Two-story, three-bay, brick residence; low-pitched gable roof and bracketed cornice; 1/1 windows with radiating voussoirs and stone sills; panelled door with arched transom; good condition.
	9 - 11	c. 1900	Two-story, six-bay, brick carriage house; flat roof and bracketed cornice; 1/1 windows, some with arched lintels; stone sills; second story loading doors; original vertical-board door and modern garage door; good condition.
	19	c. 1885	Two-story, two-bay, brick residence; flat roof, bracketed cornice and decorative frieze full-height rounded bay; 1/1 windows; stone sills and lintels; panelled door; bracketed porch with turned members; good condition.
	21	c. 1885	Two-story, two-bay brick residence; flat roof; bracketed cornice and decorative frieze full-height, rounded bay; 1/1 windows; stone lintels and sills; panelled door; good condition.
	23	c. 1885	Two-story, two-bay, brick residence; flat roof; bracketed cornice and decorative frieze; full-height, rounded bay; 1/1 windows stone lintels and sills; panelled door; bracketed porch with some alterations; good condition.
	23 Rear	c. 1900	One-story, two-bay, clapboarded garage; flat roof; glazed and panelled doors; good condition; non-contributing

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Johnes Street</u>	c. 1885	Three-story, two-bay, brick residence; low-pitched gable roof; bracketed cornice and panelled frieze; full-height, five-sided bay; 1/1 sash; stone lintels, sills and water table; recessed entry with transom and new glazed and panelled doors; good condition.
35			
41		c. 1885	Three-story, three-bay, brick residence; low-pitched gable roof; 2/2 sash and brick lintels and stone sills; arched transom above panelled door.
41 Rear	(on So. William St.)		One-story, two-bay cinder block garage flat roof; modern panelled garage doors; non-contributing.
43 Rear	(on So. William St.)		One-story, four-bay garage; flat roof; sides are rock-faced cinder block; facade is clapboard and stucco; modern glazed and panelled garage doors; non-contributing.
49-51		c. 1910	One-story, three-bay cinder block garage; flat roof with stepped parapet; one large panelled garage door; obscured window and glazed and panelled door; non-contributing.
2-8		1882	Three- to four-story, multi-bay, brick industrial building; gabled roof and bracketed cornice; 1/1 sash; segmental arched windows; wooden loading doors; good condition.
18-22		c. 1950	One-story, two-bay, cinder block commercial structure; flat roof; large, panelled garage doors and panelled regular doors; obscured windows; non-contributing.
44-62		1883-1890	Three-story, multi-bay brick industrial building; low-pitched gable roof; segmentally arched windows with stone sills; 6/6 sash; wooden doors.
70-74		c. 1880	Industrial complex comprised of one- to three-story brick structures. Fenestration generally segmentally arched with multipaned sash.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Johnson Street</u>		
	9-11	c. 1910	Two-story, four-bay brick commercial building; flat roof with cement band and brick bands; second-story windows sealed; first story has modern glazed and panelled door; two large industrial windows and double glazed and panelled doors; good condition.
	17-19	c. 1870	Three-story, six-bay, brick double house with full basement; flat roof, altered and bracketed cornices; 2/2 sash; segmentally arched windows with stone sills; stone water table; obscured or double, glazed and panelled doors with transoms; good condition.
	21-23	c. 1870	Two attached three-story, three-bay brick residences; flat roof; bracketed cornice and panelled frieze; raised basement; 2/2 sash; segmentally arched windows with stone sills; stone water table; 23 -- new and old double, glazed and panelled door with transom; good condition.
	25	c. 1880	Two-story, three-bay brick residence; flat roof and aluminum-sided cornice; 2/2 sash; stone sills, lintels and water table; altered doorway and landing; panelled door; good condition.
	27	c. 1880	Two-story, three-bay brick residence; flat roof and aluminum-sided cornice; 1/1 sash; stone lintels, sills and water table; double, glazed and panelled doors with transom; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Johnson Street</u>		
	31 - 35	c. 1890	Three attached two-story, two-bay brick rowhouses; joined in rear; flat roof; bracketed cornices and one panelled frieze; 1/1 sash; stone lintels, sills and water tables; three full-height, five-sided bays; double, glazed and panelled doors; one altered; one original porch with square spindles, posts and balusters.
	39	c. 1870	Two-story, three-bay, brick residence with polychrome slate mansard roof; hooded dormers; bracketed cornice and panelled frieze; 2/2 windows with brick surrounds; some sealed; quoining; transom; porch has bracketed cornice, chamfered columns and straight balusters; good condition.
	39 Rear	c. 1950	Large, two-story, multi-bay, warehouse; flat roof; raised basement; cinder block; multi-light sash; wooden doors; non-contributing.
	43	c. 1870	Three-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels and stone sills; double, glazed and panelled doors with transom; porch has bracketed cornice, straight posts, ornate brackets and straight balusters; good condition.
	45 - 47	c. 1880	Three-story, six-bay, brick double house; flat roof; bracketed cornice and panelled frieze; 1/1 and 2/2 windows; radiating voussoirs and stone sills; two five-sided, three-story bays; shed-type or mansard hoods; arched transoms; one new and one set glazed and panelled, double doors; good condition.
	49	c. 1920	One-story, six-bay garage; rock-faced cinder block; flat roof; glazed and panelled garage doors and obscured doors and windows; non-contributing.
	109	c. 1870	Three-story, three-bay brick residence; flat roof; bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels and stone sills; projecting first story section has new balustrade on top; panelled door; good condition.
	111	c. 1890	Three-story, two-bay brick residence; flat roof; bracketed cornice and panelled frieze; 2/2 windows; stone sills, lintels and water table; raised basement; transom, sidelights and modern door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Johnson Street</u>		
	113 - 15	c. 1865	Two attached two-story, three-bay brick residences; flat roof; plain and bracketed cornice; 2/2 sash; arched brick lintels and stone sills; raised basement; glazed and panelled doors.
	117	c. 1870	Three-story, three-bay, brick residence; flat roof, bracketed cornice and rope-type trim on frieze; 2/2 windows; arched brick lintels; arched transom and altered doorway; stone water table and raised basement; good condition.
	119	c. 1870	Three-story, three-bay, brick residence; flat roof, bracketed cornice and rope-type trim on frieze; 2/2 windows; arched brick lintels and stone sills; doorway made smaller; new door; porch has turned columns and balusters and new stair rail; raised basement; good condition.
	125	c. 1890	Three-story, two-bay, brick commercial/residential structure; flat roof, bracketed cornice and panelled frieze; two-story square bay is shingled and panelled; storefront has bracketed cornice, fluted cast iron columns, altered display windows and entry; residential entry has double, glazed and panelled doors with transom; with small panes of glass around perimeter; good condition.
	127	c. 1890	Two-story, three-bay brick residence with mansard roof; shed dormer; rounded, full-height bay with pedimented gabled; bracketed cornice; 1/1 windows; rock-faced stone sills, lintels and water table; glazed and panelled doors; good condition.
	129	c. 1875	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows with radiating voussoirs and stone sills; brick water table; glazed and panelled door with arched transom; porch has simple cornice and frieze; ornate brackets, straight posts, turned balusters; good condition.
	131	c. 1875	Two-story, three-bay, brick residence; low-pitched gable roof; bracketed cornice; bracketed and panelled frieze with slight pitch; 2/2 windows with radiating voussoirs; glazed and panelled door; arched transom; gabled canopy with bargeboard trim; new landing; good condition.

## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Johnson Street</u>		
	133	c. 1875	Two-story, three-bay, brick residence; low-pitched gable roof with slight pitch at center; bracketed cornice and panelled frieze; 2/2 windows and radiating voussoirs; gabled canopy with bargeboard trim; first story altered: third window cut in; glazed and panelled door; arched transom; wooden landing with turned members; good condition.
	135	c. 1875	Two-story, three-bay, brick residence; low-pitched gable roof with slight pitch at center; bracketed cornice and panelled frieze; 2/2 windows with radiating voussoirs; glazed and panelled door, arched transom; porch has bracketed cornice, ornate brackets, turned columns and balusters; good condition.
	137	c. 1870	Three-story, three-bay, brick residence; gabled roof and bracketed cornice; 1/1 windows; arched brick lintels and stone sills and water table; arched transom and modern door and landing; good condition.
	139	c. 1870	Two and one half-story, three-bay, brick residence; gabled roof; eyebrow 1/1 and 2/2 windows; arched brick lintels and stone sills; new door and altered entry; good condition.
	143	c. 1870	Two and one half-story, three-bay, brick residence; gabled roof and bracketed cornice; eyebrow windows with brick bands beneath; 6/6 windows; arched brick lintels and stone sills; brick water table; transom and altered entry with modern door; good condition.
	145	c. 1870	Two-and-one-half-story, three-bay clapboarded residence; gabled roof and bracketed cornice; 3/3 eyebrow and 1/1 windows; transom, sidelights and glazed and panelled door; porch has dentidulated cornice and turned members; good condition.
	147	c. 1870	Two-story, three-bay residence; gabled roof with bracketed cornice; tarpaper shingles; 1/1 windows; molded overdoor, transom and sidelights and glazed and panelled door; good condition.
	149 - 53	c. 1965	One-and-one-half-story, multi-bay, modern brick church; gabled roof; partially enclosed portico with Tuscan columns; multi-light windows; non-contributing.



## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Johnson Street</u>		
	155	c. 1890	Two-story, three-bay, brick residence; flat roof, simple cornice and panelled frieze; 1/1 windows with radiating voussoirs or sills and lintels and smooth stone water table; left side projects; double, glazed and panelled doors; porch has simple cornice, plain frieze, turned members; good condition.
	157	c. 1890	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; left square section projects; 1/1 windows; stone sills and lintels and water table; porch has simple cornice, plain frieze; turned columns and straight balusters; glazed and panelled door; good condition.
	159	c. 1895	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels and water table; left square section projects; porch has denticulated cornice, turned spindles and columns and straight balusters; glazed and panelled door, transom; good condition.
	159A	c. 1890	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; stone lintels, sills, water table; 1/1 windows, arched, one tripartite one-story rounded bay; arched transom; glazed and panelled door; arched label with keystone above; non-contributing garage.
	165 - 67	c. 1885	Three-story, four-bay, brick double residence; flat roof, bracketed cornice and panelled frieze; 2/2 and 1/1 sash; two five-sided, three-story bays; panelled single doors with transoms; and double, glazed and panelled doors with transom; one simple and one new porch.
	169	c. 1885	Three-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 2/2 windows; stone sills and lintels; five-sided, three-story bay; double, glazed and panelled door with transom; porch retains turned balusters; fair condition.
	6 - 8	c. 1900	One-story, six-bay commercial structure; flat roof; tarpaper siding; entries altered and transom enclosed; display windows boarded up; fair condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Johnson Street</u>		
	10	c. 1865	Two-story, three-bay, brick residence; gabled roof, bracketed cornice; 1/1 windows; arched brick lintels and stone sills; storefront added to first story; recessed entry, display windows altered; good condition.
	12	c. 1865	Two-story, three-bay brick residence with full basement; gabled roof; bracketed cornice and panelled frieze; 6/6 windows; arched brick lintels; double, glazed and panelled doors, transoms, new landing; good condition.
	14	c. 1870	Two-story, three-bay, brick residence with mansard roof; hooded domers; bracketed cornice and panelled frieze; 2/2 windows; arched lintels and stone sills and water table; large picture window added; arched transom and new door; good condition.
	16 - 18	c. 1870	Three-story, six-bay, brick double house; low-pitched gable roof, bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels and stone sills and water table; entries boarded up; wooden landings; fair condition.
	48 - 52	c. 1885	Three attached two-story, two-bay brick row houses; flat roof, bracketed cornice and panelled frieze; windows and doors knocked out or boarded up; landing missing; stone lintels, sills and water table; three five-sided, two-story bays.
	54	c. 1865	Two-and-one-half-story, three-bay, brick residence; gabled roof and plain cornice; three-light eyebrow and 1/1 windows; arched lintels and stone sills and water table; transom and door; good condition.
	56 - 58	c. 1885	Two-story, four-bay, brick double house; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills, lintels and water table; raised basement; double, glazed and panelled doors, transom; two five-sided, two-story bays; original wooden landings; good condition.
	60	c. 1870	Three-story, three-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 6/6 and 1/1 windows; arched brick lintels and stone sills; small hood over altered storefront; recessed entry has transom but changed door; panelled residential entry new with old transom; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Johnson Street</u>		
64		c. 1885	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone lintels and sills; transom and panelled door; good condition.
66 - 68		c. 1875	Three-story, six-bay brick double residence; flat roof, bracketed cornice and panelled frieze; 2/2 sash; arched brick lintels and sills; 66 -- panelled entries and doors, some alterations; arched transoms, endposts.
70 - 72		c. 1890	Two-story, four-bay, brick double house; raised basement; flat roof, bracketed cornice and panelled frieze; 2/2 windows, two full-height three-sided bays; one set double, glazed and panelled doors and one new door, transom; good condition.
74 - 76		c. 1885	Two-story, six-bay, brick double house; low-pitched gable roof, bracketed cornice and panelled frieze; 1/1 windows; radiating voussoirs and stone sills; canopies with shed roofs, bargeboard trim and brackets; transoms; original panelled doors and new door; three-sided one-story bay on south side; good condition.
82		c. 1865	Two-story, three-bay residence; gabled roof; asbestos siding; double 1/1 windows, pedimented surrounds; double, glazed and panelled doors with transom; porch removed; fair condition.
84		c. 1865	Two-story, three-bay residence; gable roof; asbestos siding; 1/1 windows; pedimented surrounds; altered entry; gabled portico with panelled pediment, engaged turned columns; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Johnson Street</u>		
86		c. 1865	Two-story, three-bay residence; gabled roof; tarpaper siding; pedimented surrounds; 1/1 windows; double, glazed and panelled door, altered transom; good condition.
88		c. 1865	Two-story, three-bay residence; gabled roof; aluminum siding; 1/1 windows, pedimented surrounds; portico has denticulated cornice, Tuscan columns and straight balusters; obscured transom and door; good condition.
90		c. 1865	Two-story, three-bay residence; gabled roof; asbestos siding; 1/1 windows; pedimented surrounds; glazed and panelled door; transom and sidelights enclosed; gabled portico with panelling in pediment, turned spindles and columns, straight balusters; good condition.
92		c. 1865	Two-story, three-bay residence; gabled roof; bracketed cornice and panelled frieze; asbestos siding; 2/2 windows; pedimented surrounds; portico has turned members; brackets, solid balustrade, transom, new door; good condition.
94		c. 1865	Two-story, three-bay residence; gabled roof; asbestos siding; 1/1 and 2/2 windows; pedimented surrounds; double, glazed and panelled doors with transom; portico has hipped roof, engaged turned columns, cutwork brackets, square posts and new railing; good condition.
96		c. 1865	Two-story, three-bay residence; gabled roof; 1/1 windows; pedimented surrounds; transom with double, glazed and panelled doors; plain wooden landing; good condition.
98		c. 1865	Two-story, three-bay clapboarded residence; gabled roof; 1/1 windows, pedimented surrounds; transom and double, glazed and panelled doors; new landing; good condition.
100		c. 1865	Two-story, three-bay residence; low-pitched gable roof; aluminum sided; 1/1 windows; enclosed gabled vestibule; good condition.
100 Rear (on Third Street)			One-story, one-bay cinder block garage; flat roof; modern panelled garage doors; lean-to addition; non-contributing.
110		c. 1885	Three-story, two-bay brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 windows, stone sills and lintels; three-sided, three-story bay; double; glazed and

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Johnson Street</u>		panelled doors with transom; porch has turned members and ornate brackets; good condition.
	110 (cont'd.)		
112		c. 1855	Two and one half-story, three-bay residence; gabled roof; cross gable with bargeboard trim pointed arch, gable window; asbestos siding; 2/2 windows, new double one, new glazed and panelled door; porch has plain frieze, paired slender columns atop asbestos sided railing; one-story, square bay on south elevation; good condition.
114		c. 1905	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two-story, square bay has separate bracketed cornice; enclosed porch with balustrade atop; good condition.
116		c. 1855	Two-and-one-half-story, two-bay residence; gabled roof; cross gable with bargeboard trim; pointed-arch gable window; three-sided bay on second story and one on first; 6/6 and 2/2 and 1/1 windows; double, glazed and panelled doors; porch has bracketed cornice, Tuscan columns and new railing; good condition.
118		c. 1905	Two-story, one-bay, brick carriage house; gabled roof; second story loading door; modern, glazed and panelled garage door; non-contributing carriage house.
120 - 22		c. 1885	Three-story, four-bay, brick double house; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels and water table; two full-height, five-sided bays; double, glazed and panelled doors; landings with cast iron railings; good condition.
130		c. 1880	Two-story, two-bay, brick residence; flat roof and plain cornice; 1/1 windows with arched lintels; porch has hipped roof with straight posts; obscured door; fair condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Johnson Street</u>		
	132	c. 1870	Two-story, three-bay, brick residence; flat roof and bracketed cornice; 2/2 windows; arched brick lintels and stone sills and water table; raised basement; gabled hood with decorative brackets; new glazed and panelled door and landing; very good condition.
	<del>134</del>	c. 1905	One-story, four-bay, brick garage; flat roof; glazed and panelled garage doors; non-contributing.
	136	c. 1870	Two-story, three-bay brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels, stone sills; glazed and panelled door, sidelights, fanlight; cinder block chimney; good condition
	138	c. 1880	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels, stone sills and water table; raised bsement; arched transom and double, glazed and panelled doors; good condition.
	140 - 42	c. 1875	Two-story, six-bay, brick double house; flat roof, bracketed cornice andone panelled frieze; 1/1 and 2/2 windows; arched brick lintels, stone sills and double, glazed and panelled doors with arched transom; one has porch with simple cornice, plain frieze, straight spindles, turned columns, balusters; other has hood with spindles and straight brackets and balusters; good condition.
	144	c. 1870	Two-story, three-bay, brick residence; flat roof and plain cornice; 1/1 windows; arched brick lintels and stone sills; porch has straight spindles, turned columns, pedimented entry; enclosed transom; new glazed and panelled door; good condition.
	146	c. 1885	Two-story, two-bay, brick residence with aluminum siding; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone water table, sills and lintels; full-height five-sided bay; glazed and panelled door with transom; wooden landing with turned balusters good condition.
	148 - 48½	c. 1885	Three-story, four-bay brick double residence; flat roof, bracketed cornice and panelled frieze; 2/2 sash; stone lintels, sills and water table; two-story, five-sided bay; double, glazed and panelled doors with transoms; landings with turned balusters.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Johnson Street</u>		
150		c. 1860	Two-and-one-half-story, three-bay, brick residence; cross gabled roof with bargeboard and brackets; 1/1 windows; arched brick lintels and water table; first story windows and door recessed; arched transom and panelled door; new landing; good condition.
152		c. 1880	Two-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 2/2 windows; stone sills, lintels and water table; enclosed transom; altered landing; double, glazed and panelled doors; good condition.
154		c. 1885	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 and 2/2 windows; stone sills and lintels and water table; full-height five-sided bay; double, glazed and panelled doors with transom; new landing; good condition.
156		c. 1870	Two-and-one-half-story, three-bay, brick residence; gable roof; bracketed cornice; eyebrow windows with brick band underneath; 1/1 windows; arched brick lintels and stone sills and water table; portico has denticulated cornice, turned spindles, brackets, solid wood railing; entry has cast iron twisted rope-type trim transom, sidelights, cast iron columns, sidelights and glazed and panelled door; good condition.
158		c. 1875	Two-story, two-bay residence; aluminum sided; low-pitched gable roof; bracketed cornice and panelled frieze; 1/1 and 2/2 windows; one-story, three-sided bay; bracketed cornice at first story level, modern door. enclosed transom; good condition.
180		c. 1980	Four-and-one-half-story, multi-bay modern apartment house with full basement; stuccoed; modern mansard roof of aluminum; recessed dormers; bands or windows separated by pilasters; non-contributing.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>S. Johnson Street</u>		
3		c. 1875	Four-story, three-bay brick commercial/residence; altered storefront; altered windows on upper elevations; parapet added; fire escape on facade; fair condition.
11		c. 1880	Two-story, four-bay brick commercial/residential structure; attached to 151 Ann St.; two entrances; flat arch windows with stone lintels and sills; 2/2 sash; wooden bracketed cornice; good condition.
13		c. 1880	Three-story, three-bay brick residence; flat arch windows with stone lintels and sills; 2/2 sash; wooden bracketed cornice; fire escape on facade; fair condition.
15		c. 1880	Two-story, three-bay brick commercial structure; later storefront at street level; two windows and central loft door on second level; wooden cornice; fair condition.
17		c. 1870	Two-story, three-bay brick commercial structure; overhead door at street level; three segmentally arched windows on upper level; wooden bracketed cornice; fair condition.
19		c. 1875, c. 1950	One-story brick and cinderblock commercial building; overhead door at street level; non-contributing.
10-12		c. 1950	One-story, masonry commercial building; stuccoed; formerly stable converted to auto repair shop; two overhead doors on facade; non-contributing.



EAST END HISTORIC DISTRICT, NEWBURH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Lander Street</u>		
	25	c. 1875	Three-story, three-bay, brick residence; flat roof, bracketed cornice with pendants and panelled frieze; 2/2 windows; arched brick lintels and water table; double, glazed and panelled doors; transom, new landing; good condition.
	27	c. 1875	Three-story, three-bay, brick residence with raised basement; flat roof and bracketed cornice; 6/6 windows; arched brick lintels and water table; new landing with straight balusters, altered door; good condition.
	29	c. 1875	Three-story, three-bay, brick residence with raised basement; flat roof, bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels and water table; glazed and panelled doors with transom; wooden landing; good condition.
	31	c. 1875	Three-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 2/2 windows; double radiating voussoirs and stone sills; entry obscured would accommodate double door; cement landing; good condition.
	33	c. 1875	Three-story, three-bay, brick residence; raised basement; flat roof, bracketed cornice and panelled frieze; 1/1 windows; arched lintels and water table; panelled door; new landing; good condition.
	37 - 39	c. 1900	Three-story, multi-bay, brick industrial building; full basement; flat roof; most windows obscured; some 1/1 and 6/6; radiating voussoirs; display window obscured and cornice removed; cast iron columns; modern glazed and panelled garage door; original glazed and panelled door; north elevation has cinder block addition;
	43½ - 45½	c. 1875	Three attached three-story, three-bay, brick residences; flat roof, bracketed cornice and panelled frieze; 1/1 sash; brick lintels and stone sills; glazed and panelled doors; transoms.
	47 A	c. 1955	One-story, two-bay, commercial structure; cinder block; flat roof; wooden door and display window; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Lander Street</u>		
	47B	c. 1875	Three-story, three-bay, brick commercial/residential building; flat roof; bracketed cornice and panelled frieze; 2/2 windows with brick lintels; storefront retains cast iron cornice and is obscured; residential entry altered; good condition.
	59 - 49	c. 1855	Six attached two-and-one-half-story, two-bay row houses; gabled roof, plain cornice and eyebrow windows; brick and aluminum siding; 2/2 and new 6/6 sash; panelled doors; one canopy with mansard roof, spindles and brackets and one canopy new shed roof; bargeboard, spindles and brackets; #49 storefront has cast-iron columns, recessed entry and panelling beneath display window.
	63 - 71	c. 1855	Five attached two-and-one-half-story, two-bay, brick residences; gabled roof; cornice and frieze altered; eyebrow windows, new 6/6 sash; stone sills and arched brick lintels; double segmentally arched windows; transoms; glazed and panelled doors; raised basement; new landings.
	77 - 83	c. 1855	Four attached two-and-one-half-story, three-bay brick residences; gabled roof and bracketed cornice; eyebrow windows with band beneath; 2/2 sash; arched lintels; double, glazed and panelled doors with transoms; stone water table; new wooden landings.
	85 - 87	c. 1855	Two-and-one-half-story, six-bay, brick double house; gabled roof; cross gables with bargeboard arched gable window; 6/6 windows; arched brick lintels; some windows recessed; double, glazed and panelled doors with transoms; gabled canopy with panelling and bargeboard; stone water table; good condition.
	91	c. 1865	Two-story, three-bay, brick residence; gabled roof and bracketed cornice; obscured windows, arched brick lintels and stone sills; horizontal, decorative brick panel; arched entry obscures; stone water table; good condition.
	93 - 95	c. 1865	Three-story, six-bay brick double residence; low-pitched gable roof; bracketed cornice and panelled frieze; windows and doors missing; arched lintels and stone sills; stone water table.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Lander Street</u>		
	97		See 139 R Third Street
	103	c. 1900	See 142 R Third Street
	109		One-story, two-bay garage; rock-faced cinder block; flat roof with stepped parapet; brick lintel over modern panelled garage doors; non-contributing.
	111	c. 1865	Two-and-one-half-story, three-bay, brick residence; gabled roof; gabled dormers with panelling, molded cornice; 4/4 windows with brick labels and stone sills; entry altered and new doors; portico has simple architrave, plain frieze, new posts on solid railing; brick water table; good condition.
	113	c. 1865	Two-and-one-half-story, three-bay, brick residence; cross gabled roof with bargeboard; 4/4 and 6/6 windows; arched brick lintels and stone sills and water table; first story windows recessed; double, glazed and panelled doors with transom recessed; landing is brick and stone with cast iron railing; good condition.
	115 - 119	c. 1865	Three attached two-and-one-half-story, two-bay, brick row houses; gabled roof, plain cornice and eyebrow windows with horizontal brick band beneath; 6/6 sash some recessed windows; arched brick lintels and stone sills; transom; glazed and panelled door; new wood landing; #117 has altered first story and portico with simple entablature; modern square posts on shingled railing.
	121	c. 1870	Two-story, three-bay, brick residence with slate mansard roof; hooded dormers; bracketed cornice and panelled frieze; 2/2 windows with stone sills and lintels; enclosed transom; double, panelled doors; three-sided one and one half-story bay; stone water table; new landing; good condition.
	123	c. 1870	Two-story, four-bay, brick commercial/residential structure; flat roof, bracketed cornice and panelled frieze; straight and arched lintels and doors and windows obscure; stone sills; arched transom; altered storefront; good condition.

## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Lander Street</u>		
	129 - 31	c. 1855	Two-and-one-half-story, six-bay, brick double house; gabled roof and aluminum-sided cornice; eyebrow windows with horizontal brick panel beneath; 2/2 and 4/4 windows; straight lintels and stone sills and water table; arched transom; doors altered; large cast iron label; one portico with turned members and brackets; good condition.
	133 - 35	c. 1855	Two-and-one-half-story, six-bay double house; asbestos siding; gabled roof and molded cornice; eyebrow windows with band beneath; 6/1 and 1/1 and obscured windows; modern doors; transom; portico with straight balusters and slender straight posts; good condition.
	137 - 139	c. 1876	Two-story, four-bay, brick double house with mansard roof; hooded and plain domers, bracketed cornice and panelled frieze; two full-height three-sided bays; 2/2 and 1/1 windows; double, panelled doors with transoms; smooth stone lintels, sills, water table; good condition.
	141	c. 1860	Two-story, three-bay, brick residence; raised basement; gabled roof; cornice; 1/1 radiating voussoirs and stone sills; glazed and panelled door; porch has simple cornice, plain frieze, Tuscan columns, solid railing and straight balusters; good condition.
	143 - 45	c. 1855	Two-and-one-half-story, six-bay double house; clapboard and asbestos siding; gabled roof and bracketed cornice; 3/3 eyebrow windows with band beneath; 6/6, 6/1 and 1/1 windows; classical door surrounds with sidelights and transom and glazed and panelled door; raised basement, new landings; good condition.
	147	c. 1855; 1870	Two-story, three-bay, clapboard residence; with mansard roof, gabled domers, bracketed cornice; 6/6 windows; classical entry with transom, sidelights and panelled door; gabled portico with straight posts on shingled railing; good condition.
	149	c. 1855; 1890	Two-and-one-half-story, three-bay residence; asbestos siding; corss gabled roof with bargeboard, bracketed cornice; arched tripartite window on gable; 1/1 windows; classical entry with transom, sidelights and glazed and panelled door; raised basement; new landing; good condition,

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Lander Street</u> 151	c. 1870	Three-story, three-bay residence; gabled roof; bracketed cornice and panelled frieze; tar-paper siding; 2/2 windows, obscured doors; fair condition.
153		c. 1870	Three-story, three-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 2/2 windows; double, radiating voussoirs and stone sills; storefront: cornice removed, retains recessed entry with double, glazed and panelled doors, cast iron columns and panelling beneath display windows; residential entry has double, glazed and panelled doors with transom; good condition.
155		c. 1870	Two-story, three-bay, brick residence with mansard roof; hooded domers, bracketed cornice and panelled frieze; 2/2 windows; recessed, radiating voussoirs with keystones; double, glazed and panelled doors with transom; new landing; stone water table; good condition.
157		c. 1865	Two-and-one-half-story, three-bay, brick residence; gabled roof; gabled dormer and bracketed cornice; 1/1 windows; arched lintels with keystones; glazed and panelled door with arched transom; stone water table and sills; new landing; good condition.
159		c. 1855	Two-story, three-bay residence; gabled roof; asbestos siding; windows and entry obscured; plain canopy; fair condition.
161 -63		c. 1865	Two-and-one-half-story, six-bay brick double residence; gabled roof, denticulated cornice; 4/4 sash; obscured windows and doors; straight lintels and stone sills and water table.
165		c. 1865	Three-story, three-bay, brick residence; low-pitched gabled roof; raised basement; windows and doors obscure; stone lintels, sills and water table; canopy with shed roof, lattice-like woodwork; brackets; good condition.
167		c. 1865	Two-and-one-half-story, three-bay, brick residence; gabled roof and molded cornice; eyebrow windows with brick band beneath; 2/2 windows with straight lintels, stone sills; portico has Tuscan columns and rock-faced cinder block balustrade; transom, sidelight and glazed and panelled door; stone water table; good condition.

EAST      END      HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Lander Street</u>		
	169	c. 1865	Two-and-one-half-story, three-bay residence; gabled roof and molded cornice; eyebrow windows with brick band beneath; 6/6 windows with arched brick lintels, transom and sidelights and panelled door; cement landing; water table; good condition.
	171	c. 1865	Two-and-one-half-story, four-bay, brick residence; gabled roof and molded cornice; eyebrow windows with brick band beneath; 1/1 and 6/6 windows; arched brick lintels and stone sills; arched transom and glazed and panelled door; stone water table good condition.
	173 -75	c. 1840	Two-and-one-half-story, six-bay brick double residence; gabled roof and molded cornice; eyebrow windows with brick band beneath; 6/6 sash; straight lintels and stone sills; transom; old and new panelled doors and sidelights; new landings; stone water table.
	183	c. 1905, c. 1940	See 162 R South Street.
	185		One-story, four-bay, brick commercial garage; flat roof with stepped parapet; glazed and panelled door with transom; modern, glazed and panelled garage door; new twelve-light window and sealed window; non-contributing
	191	c. 1870	Two-story, two-bay, brick residence with mansard roof; hooded dormers and bracketed cornice; three-sided, two and one half-story bay; recessed, panelled facade; 2/2 windows; double, glazed and panelled door with transom; landing has cast iron railing; good condition.
	193	c. 1870	Two-story, two-bay, brick residence with mansard roof; hooded dormers and bracketed cornice; three-sided bay, two-and-one-half-story bay; 2/2 windows with stone lintels, double, glazed and panelled door with transom; landing with cast iron railing; good condition.
	195	c. 1870	Two-story, two-bay, brick residence with mansard roof; bracketed cornice and panelled frieze and hooded dormer; 1// and 2/2 windows two and one half-story, three-sided bay; transom and double, glazed and panelled doors; landing with new rail; good condition.
	197	c. 1895	Three-story, six-bay, brick residence; flat roof, bracketed cornice and panelled frieze; full-height, central pavillion; 1/1 and 2/2 windows; labels are adjoining at bases;

EAST      END      HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Lander Street</u> 199 (cont'd.)		and some sills are continuous; large, double, glazed and panelled door; good condition.
6		c. 1870	Three-story, three-bay, brick residence; flat roof and bracketed cornice; 1/1 windows with arched brick lintels; glazed and panelled door with transom; brick landing; raised basement; good condition.
8 - 16		c. 1900	Two-and-one-half-story, eight-bay industrial building; stucco; 1/1 and modern windows; right section has gabled roof, first story has extensive alteration; left section has flat roof with parapet; first story entirely sealed with cinder block, new windows cut in; good condition.
18		c. 1950	One-story, two-bay commercial building; flat roof; cinder block; modern entry and window; non-contributing.
22		c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 and 1/1 windows; continuous sills and lintels; massive brownstone overdoor with fluted pilasters; glazed and panelled door, transom and sidelights; cast iron railing; good condition.
24	c. 1870,	c. 1900	Two-story, three-bay, brick commercial structure with facade addition with stepped parapet; 1/1 sash; double, glazed and panelled door, flanked by display windows; cornice over first story; recessed brick panels.
26		c. 1875	One-story, two-bay commercial building; flat roof; asbestos siding; entry and display window obscure; good condition.
28		c. 1900	Three-story, three-bay, brick commercial/residential building; flat roof and bracketed cornice; 2/2 windows; radiating voussoirs and stone sills; central second story twelve-pane window; first story has glazed and panelled door and garage door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Lander Street</u>		
30		c. 1880	Two-story, three-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 6/6 windows; radiating voussoirs and stone sills; first story cornice removed; obscured windows, transom and glazed and panelled door; modern panelled garage door; good condition.
34		c. 1880	Two-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; windows knocked out; brick lintels and stone sills; entry obscured; projecting one-story brick storefront; display window obscured; good condition.
36 - 38		c. 1880	Two and one-half-story, six-bay double house; gabled roof; 38 - tarpaper and asbestos siding; bracketed cornice; 2/2 windows; one landing has straight balusters and turned posts; one portico has turned members; glazed and panelled doors with transoms and sidelights; good condition.
40		c. 1890	Three-story, two-bay residence; flat roof and bracketed cornice, asbestos siding; 4/4 windows; porch has molded cornice, new columns and railing; glazed and panelled door; good condition.
46 - 48		c. 1875	Two-story, four-bay, brick double house; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills and lintels; two full-height square bays; glazed and panelled doors; transoms; porches with turned or Tuscan columns and turned or straight spindles and balusters; cast iron railing; stone water table; raised basement; good condition.
50		c. 1880	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 and 1/1 windows; full-height, five-sided bay; stone sills, lintels and water table; double, glazed and panelled door with transom; good condition.
52		c. 1875	Two-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 windows; rock-faced stone sills and lintels; full-heights, rounded bay; porch has bracketed cornice, new columns and railing; new door with old transom; rock-faced stone water table; good condition.



## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Lander Street</u>		
	54	c. 1875	Two-story, two-bay, brick residence; flat roof, bracketed cornice and elaborately panelled frieze; decorative brickwork above and beneath 1/1 windows; stone sills and water table; full-height, five-sided bay; sidelights and panelled door; good condition.
	56	c. 1875	Three-story, three-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 2/2 windows; arched lintels, stone sills; storefront has recessed entry with altered doors; cast iron columns and display windows with panelling; residential entry: double, glazed and panelled doors with transom; good condition.
	60 - 74	c. 1865	Eight attached two-and-one-half-story, two-bay, brick row houses; gabled roof; eyebrow windows with band beneath; 4/4, 6/6, new 6/6 and 1/1 sash; arched brick lintels; first-story windows are double under one lintel; stone water table; several porticos have hoods, brackets, turned spindles, columns and balusters; good condition.
	76	c. 1865	Two-story, three-bay, brick residence; gabled roof; 6/1 windows; arched brick lintels; first story windows are recessed; arched transom, sidelights and new door; portico has hipped roof, new posts on wood landing; stone water table; good condition.
	78	c. 1865	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; arched lintels and stone sills; storefront has central entry, sidelights, elaborate cast iron pilasters, altered display windows; altered and panelling, residential entry obscured; good condition.
	82	c. 1865	Three-story, three-bay, brick residence; low-pitched gable roof and bracketed cornice; 6/6 windows and arched brick lintels; stone water table; new landing; double, glazed and panelled door with transom; good condition.
	86	c. 1865	Two-and-one-half-story, three-bay, brick residence; gabled roof and bracketed cornice; 3/3 eyebrow and 6//6 windows; new landing and door; stone water table; good condition.

EAST      END      HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Lander Street</u>		
	88 - 90	c. 1865	Two-and-one-half-story, six-bay, brick double house; gabled roof and bracketed cornice; 3/3 eyebrow windows; 6/6 and 6/1 windows; stone labels and sills; arched transoms, altered doors; twisted rope-type cast iron trim around entry; one plain wooden landing; one simple porch; stone water table; good condition.
	92	c. 1865	Two-and-one-half-story, three-bay, brick residence; gabled roof and bracketed cornice; 1/1 windows; stone labels, sills and water table; double, glazed and panelled doors with transom; portico has plain cornice, Tuscan columns, new base; good condition.
	94 - 96	c. 1865	Two-and-one-half-story, four-bay, brick double house; gabled roof and bracketed cornice; French, 6/1 and 6/6 windows; arched brick lintels; one new porch and one with a denticulated frieze, Tuscan columns and turned balusters; first story windows set in arched recesses; glazed and panelled doors; good condition.
	98 - 100	c. 1860	Two-and-one-half-story, three-bay, brick residence; multi-gabled with bargeboard trim; right gabled section projects and has one-story, five-sided bay; arched 2/2 windows; some windows and doors obscured; encircling porch with bracketed cornice and Tuscan columns; fair condition.
	98 - 100 Rear (on Third Street)	c. 1875	Two-story, one-bay, brick carriage house; low-pitched gabled; flat roof; aluminum-sided cornice; loading door on second story; carriage door on first with newer doors; contributing carriage house.
	116	c. 1875	Two-story, three-bay, brick residence with slate patterned mansard roof; gabled dormer; bracketed cornice and panelled frieze; 6/6 and 2/2 windows; stone sills and lintels; porch has straight spindles, turned columns and balusters; double, glazed and panelled doors with transom; good condition.
	122	c. 1875	Three-story, four-bay, brick residence; flat roof and bracketed cornice; 6/6 windows set in recesses with arched brick lintels; brick cornice over first story; new panelled door; portico has elaborate cast iron roof, columns and railing; stone water table; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Lander Street</u>		
	124 - 28	c. 1865	Three attached two-and-one-half-story, three-bay, brick residence; gabled roof with bracketed cross gables; 4/4, 6/6, 2/2, 6/1 and 1/1 sash; double, panelled and/or glazed doors; arched transom; porticos have bracketed cornice, turned members or Tuscan columns, ornate brackets.
	124 Rear (on Farrington Street)		One-story, two-bay garage; flat roof; tar-paper siding; modern panelled garage doors; good condition.
	130 - 32	c. 1870	Two-story, six-bay, brick double house with slate patterned mansard roof; hooded dormers; 6/6 and 2/2 windows; arched lintels and stone sills; arched transoms and double, glazed and/or panelled doors; wooden landings; stone water table; good condition.
	134 - 38	c. 1865	Three attached two-and-one-half-story, three-bay, brick residences; gabled roof; cross gables with bargeboard and brackets; 2/2, 1/1, and 6/6 sash; arched lintels and stone sills; porches have plain or denticulated cornices, turned columns or square posts on cinder block or wooden landings; double, glazed door with arched transoms; stone water table
	140 - 42	c. 1870	Two-story, six-bay, brick residence with mansard roof; some aluminum siding; hooded dormers; 2/2 windows with arched lintels and stone sills; altered entries and old transoms; one portico with turned members and ornate brackets, new landings; raised basement; good condition.
	144	c. 1865	Two-and-one-half-story, three-bay, brick residence; gabled roof; cross gable with bargeboard; double window; 1/1 and 2/2 windows; arched lintels and stone sills and water table; new portico and doors; good condition.
	146	c. 1865	Two-and-one-half-story, three-bay, brick residence; gabled roof with cross gable with bargeboard brackets and double window; obscured windows; arched lintels, stone sills and water table; double, glazed and panelled door with transom; good condition.

EAST      END      HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Lander Street</u>		
	148	c. 1865	Two-and-one-half-story, three-bay, brick residence; gabled roof; cross gable with bargeboard brackets and double window; 6/6 windows; arched lintels and stone sills and water table; obscured door, good condition.
	150 - 56	c. 1865	Four attached two-and-one-half-story, two-bay, brick residences; gabled roof; eyebrow windows; 6/6, 1/1 and 6/1 sash; two one-story, three-sided bays; porch with denticulated cornice, round or turned columns with shingled railing or turned balusters; one shed-roof portico glazed and panelled doors; transoms;
	158 - 60	c. 1865	Two-story, six-bay, brick double house; flat roof and bracketed cornice; 6/6 windows; stone sills, lintels and water table; double, glazed and panelled door; new landings; good condition,
	162	c. 1870	Four-bay, three-story, brick residence; flat roof and bracketed cornice; 2/2 windows; arched lintels, stone sills and water table; double, glazed and panelled doors with transom; rock-faced cinder block landing; good condition.
	164	c. 1870	Three-story, three-bay, brick residence; flat roof and bracketed cornice; obscured windows and doors; arched lintels and stone sills; scalloped trim around transom area; good condition.
	166 - 82	c. 1870	Nine attached three-story, two-bay row houses; brick flat roof, bracketed cornice and panelled frieze; 2/2 sash; arched lintels and stone sills; double, glazed and panelled doors with transoms cast-iron columns and bargeboard trim around transom area; all landings altered.
	192 - 96	c. 1870	Three attached three-story, three-bay brick residences with mansard roofs; hooded dormers, bracketed cornice and panelled frieze; altered 2/2 sash; arched lintels; doors are panelled with arched transom and labels.
	200 - 204	c. 1870	Three attached three-story, three-bay brick row houses with mansard roof, hooded dormers, bracketed cornice and panelled frieze; altered 2/2 sash; arched lintels with drip courses; sill have brackets; doors have elaborate labels; arched transoms; new glazed and panelled doors with labels.

EAST      END      HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South Lander Street</u>		
17		c. 1890	One-story, multi-bay, brick and cinder block and corrugated metal commercial structure; gabled and flat roofs; garage doors; several cinder block garage additions; non-contributing.
19		c. 1890	Two-story, multi-bay, brick industrial building; flat roof and plain cornice; radiating voussoirs; band or small arched windows; cargo entry with heavy doors; good condition.
21 - 25		c. 1900	Two-story, multi-bay, brick industrial building; flat roof; paired 6/6 windows; double radiating voussoirs and stone sills; extensive alterations on first story; good condition.
35		c. 1965	One-story, five-bay, stuccoed commercial building; modern metal "mansard" roof; panelled garage doors and glazed and panelled doors; non-contributing
37 - 41		c. 1910	One-story, five-bay commercial building; flat roof; rock-faced cinder block; glazed and panelled garage doors and regular doors; obscured windows; modern shingled hood; non-contributing.
55		c. 1900	Two-story, three-bay, brick residence; flat roof and bracketed cornice; 1/1 windows with rock-faced stone lintels and sills; brick water table; recessed entry with interior stairs, transom and glazed and panelled door; good condition.
57		c. 1895	Two-story, five-bay, brick residence; flat roof and bracketed cornice; 2/2 windows with rock-faced lintels and sills; brick water table; right, two-bay section projects; glazed and panelled door; elaborate, bracketed porch with turned members; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South Lander Street</u> 71		See 74R Carson Avenue
89 - 91		c. 1890	Three-story, four-bay, brick double house; flat roof, bracketed cornice and panelled frieze; single or double l/l windows; two full-height square bays; glazed and panelled doors and new landings; good condition.
93		c. 1890	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; full-height, square bay; single or double l/l windows; altered entry, sidelights remain; good condition.
95		c. 1890	Three-story, four-bay, brick commercial/residential structure; flat roof, bracketed cornice and panelled frieze; two three-sided bays on upper stories; sided with tarpaper, ll/ windows; storefront retains denticulated and bracketed cornice, recessed entry with transom and glazed and panelled door; cast iron columns and panelling beneath windows; other openings obscured; good condition.
97 Rear (on Overlook Place)			One-story, two-bay, brick and clapboarded garage; hipped roof; panelled modern garage doors; non-contributing.
103		c. 1890	See 73 R Overlook Place
107			See 74R Courtney Avenue
119		c. 1890	Two-and-one-half-story, two-bay residence; aluminum sided; multi-gable slate roof; facade gable has round, arched window; two-story, three-sided bay; porch and entry altere gabled projection on side; good condition.
123			See 72 R Henry Street
139		c. 1955	One-story, three-bay, brick residence; gabled roof with aluminum-sided ends and pediment; modern, plate glass windows and doors; attached garage, non-contributing.
151			See 72 R Bayview Terrace

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South Lander Street</u>		
18		c. 1915	One-story, eight-bay, stuccoed industrial building; flat roof with stepped parapet; modern windows and garage doors; modern facade attached to two-story, nineteenth-century brick industrial building; paired windows with radiating voussoirs; non-contributing.
34 - 36		c. 1890	Three-story, four-bay, brick double house; flat roof, bracketed cornice and panelled frieze; altered 1/1 windows; stone sills and lintels; two three-sided, two-story bays on top stories; with tarpaper siding; #34 retains fluted "Eastlake" surrounds; transoms and new doors; good condition.
38		c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; rock-faced stone sills and lintels; full-height rounded bay, transom and double, glazed and panelled doors; wooden landing with straight balusters; good condition.
40			See 32 R Benkard Street
50			See 31 R Benkard Street
54		c. 1900	One-story, two-bay garage, brick facade and cinder block sides; flat roof; modern, glazed and panelled garage doors; good condition.
56		c. 1905	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows with continuous rock-faced stone sills and lintels; left, square section projects, double, glazed and panelled door; good condition.
58		c. 1900	Two-story, three-bay, brick residence; new facade; flat roof, bracketed cornice, frieze and architrave; 2/2 and 1/1 windows; new glazed and panelled door with narrow sidelights; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South Lander Street</u>		
72		c. 1900	Two-story, three-bay, brick residence; flat roof, bracketed cornice and plain frieze; 2/2 windows; radiating voussoirs and stone sills; one-story, three-sided shingled bay with transom and glazed and panelled, double doors; good condition.
74		c. 1900	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; double, radiating voussoirs; 1/1 windows; bricked-in storefront cut in; old transom and door altered; good condition.
88		c. 1920	One-story, two-bay commercial/garage building; stuccoed; flat roof with false front; garage door area filled in; small window; double, panelled doors; non-contributing.
96		c. 1920	One-story, nine-bay cinder block garage; flat roof; modern, panelled and/or glazed garage doors; good condition.
98 - 100A		c. 1890	Three-story, six-bay, brick commercial/residential building; 1/1 windows, stone sills and lintels, storefront has denticulated cornice and architrave trim; display windows and recessed entries with transom and glazed and panelled doors, cast iron columns, paneling beneath windows; good condition.
102 - 04		c. 1910	Two-story, six-bay, brick commercial building; flat roof; peaked parapet with stone band; 2/2 windows; stone sills and lintels; garage entry enclosed with new door cut in; good condition.
106		c. 1905	Two-story, three-bay carriage house; flat roof; tarpaper and asbestos siding; 2/2 windows flank second story loading door; modern garage door; non-contributing.
120			See 70 R Henry Street
136			See 69 R Henry Street.
138			See 70 R Beacon Street
152			See 69 R Beacon Street.
154			See 68 R Bayview Terrace.



## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>LeRoy Place</u>		
	13-19	c. 1915	Two-story, three-bay frame Craftsman style residence; stucco on first floor, frame on second floor; central entrance with sidelights and two-tiered porch supported by Tuscan columns on stuccoed bases, exposed rafter; paired and three-part windows, multipaned upper sash; side, one-story bay with parapet; flare hipped roof with exposed sawn rafter ends, hipped central doors with exposed rafter ends. <sup>22</sup>
	21-23	c. 1925	One-story, three-bay brick residence with Colonial Revival details; central arched entrance; semi-circular portico with Tuscan columns and roof balustrade; three-sided frame bays flank entrance; flat roof with parapet at facade; flat-arched windows with 6/1 sash.
	25	c. 1915	Two-story, three-bay stucco, Craftman-styled residence; central entrance and two-tiered porch with square columns and roof balustrade; paired and three-part windows; 4, 6, and 8/1 sash; tiled hipped roof with dormers centrally located on front and side elevation. Stuccoed garage with hipped, tiled roof, contributing.
	31	c. 1910	Two-story, five-bay brick Colonial Revival style residence; central entrance with broken pediment and Ionic portico; brick quoining; flat arched windows stone lintels (keyed) and sills; 6/1 sash; tiled hipped roof.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>LeRoy Place</u>		
	2 - 4	c. 1905	Two attached four-story, three-bay brick commercial/residential structures; flat roof, bracketed cornice and decorative frieze; 1/1 sash; segmentally arched windows; left side has modern aluminum-sided storefront; first- and second-story, glazed and panelled doors; portico with shed roof and Tuscan columns on solid balustrade.
	2 - 4 Rear (on Nicoll Street)		One-and-one-half-story, two-bay garage; gabled roof; stuccoed and shingled; wooden garage doors; non-contributing.
	14	c. 1915	See 420 R Grand Street
	44		Two-and-one-half-story, three-bay residence; gabled roof with overhanging pediment; aluminum siding; 18/1 windows; glazed and panelled door; recessed porch with Tuscan columns and turned balusters; good condition.
	50	c. 1905	Two-and-one-half-story, three-bay shingled residence; hipped and gabled roof; deeply projecting eaves; multi-light/1 windows; several, one-story, three-sided bays; left, second-story section projects; classical door surround with panelled door; classical porch with Tuscan columns, attached "Pergola" and decorative balustrade; very good condition.
	54	c. 1905	Two-and-one-half-story, three-bay residence; stone and shingles; hipped roof with hipped dormer; deeply projecting eaves; 1/1 windows; one-story, three-sided bay; porch has massive, stone piers and turned balusters; glazed and panelled door; very good condition.
	54 Rear (on Liberty Street)		One-story, two-bay, shingled garage; hipped roof; glazed and vertical-board doors; good condition; contributing.
	60	c. 1905	Two-and-one-half-story, two-bay, shingled residence; hipped roof with deeply projecting eaves; multi-light/1 windows; several one-story, three-sided bays; classical doorway with transom, sidelights and panelled door; porch has square piers on solid balustrade; very good condition.
	60 Rear (on Liberty Street)		One-story, one-bay shingled garage; hipped glazed and vertical-board doors; good condition; contributing.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>LeRoy Place</u>		
70		c. 1905	Two-and-one-half-story, three-bay, shingled residence; gambrel and gabled roof; 1/1 windows; classical door surround with panelled door; classical porch with Tuscan columns and turned balusters; very good condition.
74		c. 1905	One-and-one-half-story, three-bay, shingled residence; hipped roof with triple gabled dormer; porch has square posts; recessed first story has multi-light windows and glazed and panelled door; very good condition.
74 Rear (on Liberty Street)			One-story, one-bay, shingled garage; hipped roof; panelled door; contributing.
76		c. 1905	Two-story, five-bay, brick and stuccoed residence; gabled roof with shed dormer; 6/1 and 1/1 windows; glazed and panelled door; deep porch has Tuscan columns.
	<u>Liberty Street</u>		
1 - 5		c. 1891	Two-and-one-half-story, nine-bay, brick school; cross gabled slate roof with gabled dormers; central gabled projection with arched windows; rounded bay to right; rock-faced stone water table and belt course; panel: "Public School Number 6 1891"; wide recessed entry with large stone lintel; obscured and 1/1 windows with rock-faced stone sills and lintels; good condition.
11 - 13		c. 1885	Three-story, six-bay, brick and tarpaper-sided commercial/residential building; flat roof, bracketed cornice and panelled frieze; two two-story, three-sided bays on top stories; 1/1 windows with smooth stone sills and lintel; altered storefront has bracketed cornice, cast iron columns and display windows; residential entry in center # 9 - double, glazed and panelled doors with transoms and new door; good condition.
15 - 17		c. 1885	Three-story, eight-bay, brick and tarpaper-sided commercial/residential building; flat roof, bracketed cornice and panelled frieze; two-story, three-sided bays on top two stories; 1/1 windows with stone sills and lintels; storefront has recessed entry with double, glazed and panelled doors with transom; display windows; cast iron columns; one residential entry has double, glazed and panelled doors with transom and the other is altered; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#.</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
19		c. 1885	Three-story, four-bay, brick and tarpaper - sided commercial/residential building; flat roof; elaborate bracketed cornice and panelled frieze; rock-faced stone belt courses; two-story, three-sided bay on top two stories; residential entry: double, glazed and panelled doors with transom; storefront has cornice, recessed, double, glazed and panelled doors with transom, display windows, cast iron columns, panelling; good condition.
31		c. 1890	One-and-one-half-story, multi-bay, brick industrial building; raised basement; low-pitched gable roof; 12/12 windows with smooth stone sills and lintels; exposed rafters or simple brackets; projecting, gabled sections; large entry; large transom and glazed and panelled doors and cast iron canopy with panelled frieze; some alterations; good condition.
41 - 49		c. 1885	Five attached three-story, two-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; three-sided, three-story oriels on top stories, 1/1 and 2/2 sash stone lintels and sills; storefronts have simple cornices, recessed entries, cast-iron columns, glazed and panelled doors, transoms; display windows; some alterations; residential entries have double, glazed and panelled doors, transoms with some stained glass.
51		c. 1880	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; radiating voussoirs and double, glazed and panelled doors with arched transom; good condition.
53		c. 1880	Three-story, three-bay, brick commercial and residential building; flat roof, bracketed cornice and panelled frieze; 1/1 sash; stone sills and lintels; storefront has bracketed cornice, recessed entry, cast-iron columns, glazed and panelled door, transom, display windows, panelling, residential entry has double, glazed and panelled doors, transom with stained glass.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
	55 - 57	c. 1835	Two attached two-story, frame residences with asphalt siding; gabled roof; simple cornice; 6/1 and 1/1 sash; double, glazed and panelled doors with transom; raised basement;
	59 - 61	c. 1880	Two attached three-story, two-bay, brick commercial/residential buildings; flat roof, bracketed cornice and panelled frieze; 1/1 sash; stone sills and lintels; two-story, three-sided bays on top stories; adjacent glazed doors and balconies; storefronts have recessed entries with glazed and panelled doors, transoms, cornice, cast-iron columns, display windows, panelling; some alterations; residential entry has glazed and panelled door with transom.
63		c. 1875	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills and lintels; altered storefront: display windows boarded up and windows cut in; altered residential entry: glazed and panelled doors; good condition.
65		c. 1875	Four-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; double, glazed and panelled doors with transom; good condition.
67		c. 1875	Four-story, three-bay, brick commercial and residential building; flat roof, bracketed cornice; interior fire gutters; no windows; stone lintels and sills; storefront has metal cornice.
69		c. 1875	Four-story, three-bay, brick commercial/residential building; flat roof, bracketed cornice; 1/1 windows; stone sills and lintels; storefront has bracketed cornice; recessed entry with new door; residential entry: double, glazed and panelled door with transom; good condition.
71		c. 1855	Two-and-one-half-story, three-bay, brick commercial/residential building; low-pitched gabled roof; cornice missing; eyebrow and 1/1 windows; storefront being replaced, panelling under display windows; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
73		c. 1865	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels and stone sills; double, glazed and panelled doors with transom; good condition.
75		c. 1855	Two-story, three-bay, brick residence; gabled roof; 1/1 windows; stone sills and lintels; shed roof canopy with bargeboard, brackets and turned spindles; classical entry with four-light transom; sidelights and panelled door; stone water table; fair condition.
77		c. 1865	Two-and-one-half-story, three-bay, brick residence; cross gabled roof with patterned slate; stone sills and lintels; 4/4 windows; double, glazed and panelled doors with transom; raised basement; new wooden landing; good condition.
79		c. 1835	Two-story, three-bay, asbestos-sided residence; gabled roof; 6/6 windows; three-light transom, sidelights and glazed and panelled door; shed roof hood with bargeboard, raised basement; wooden landing; good condition.
81 -83		c. 1870	Three-story, six-bay commercial/residential building; flat roof and bracketed cornice; 1/1 windows; radiating voussoirs and stone sills; first story altered, sided with permastone, new door and windows; good condition.
85		c. 1845	Two-and-one-half-story, four-bay, brick commercial/residential building; gabled roof and bracketed cornice; 6/6 windows; stone sills and lintels; residential entry: double, glazed and panelled doors with transom; storefront has recessed entry with glazed and panelled door, transom, cast iron columns; new display windows; panelling; excellent condition.
87		c. 1870	Four-story, four-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; new 2/2 windows; arched brick lintels and stone sills; storefront has new canopy; recessed entry with glazed and panelled door, transom. panelling, display windows; residential entry: double, glazed and panelled doors with transom; excellent condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
	89	c. 1870	Three-story, four-bay, brick commercial residential building; flat roof; bracketed cornice and panelled frieze; 1/1 windows; arched brick lintels; storefront: removed cornice; recessed entry with glazed and panelled door, transom cast iron columns, panelling, display windows; residential entry: double door with transom; excellent condition.
91		c. 1885	Two-story, three-bay, brick residence; flat roof; bracketed cornice, elaborately panelled frieze; "L" shaped; two-sided bay with floral wreath decoration and panelling cast iron columns between windows; decorative brickwork; double, glazed and panelled doors with transom; portico with mansard roof, turned members, brackets; shingled bay on sides: bracketed with extensive panelling; good condition.
93		c. 1900	Three-story, two-bay, commercial building; flat roof, parapet with balustrade and bracketed cornice; four-part arched window with keystone; 1/1 sash; arched recessed entry with keystone and glazed and panelled door.
95		c. 1855	Two-and-one-half-story, three-bay, cladded residence; gabled roof; eyebrow and 6/6 windows; panelled door; new portico with shed-type roof, straight posts and balusters; good condition.
97 - 99		c. 1870	Four-story, eight-bay, brick commercial residential building; flat roof; bracketed cornice and panelled frieze; new 2/2 windows; residential entries: double glazed and panelled doors with transom; storefront: recessed entry, display windows, cast iron columns, panelling; very good condition.
99Rear	(On Washington St.)	c. 1910	One-story, one-bay, brick addition; flat roof; non-contributing.
101		c. 1845	Three-story, three-bay, brick commercial/residential building; gabled roof bracketed cornice; new 6/6 and 1/1 sash stone lintels and sills; storefront has recessed entry with double, glazed and panelled doors, transom, cast-iron columns, panelling, display windows; residential entry: double doors, transom.
101 Rear	(on Washington St.)	c. 1905	One-story, three-bay garage, flat roof modern garage doors; rock-faced cinder block; non-contributing.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
103		c. 1870	Four-story, three-bay brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 1/1 sash stone lintels and sills; storefront: bracketed cornice; display area enclosed with metal siding; residential entry has altered doors.
105-107		c. 1885	Two attached three-story, three-bay brick commercial/residential building; flat roof; denticulated cornice and elaborately panelled frieze; two two-story, three sided bays, tarpapered and shingled; 1/1 sash; stone lintels and sills; storefront: bracketed cornice, some alterations.
109-111		c. 1922	Three-story, five-bay "Labor Temple;" flat roof with stepped parapet; decorative brick pilasters; 1/1 sash; first story is altered but retains cornice and recessed entry.
113		c. 1875	Three-story, four-bay, brick commercial/residential building; flat roof, bracketed cornice and decorative frieze; 1/1 sash; segmentally arched windows; storefront has bracketed cornice, display windows, panelling, cast-iron columns and glazed and panelled doors with transoms; residential entry has glazed and panelled doors with transom.
115		c. 1855	Three-story, three-bay, brick commercial residential building; flat roof, bracketed cornice and decorative frieze; 1/1 sash; altered storefront with permastone aluminum siding on upper stories; residential entry is glazed and panelled.
117		c. 1855	Two-and-one-half-story, four-bay clapboarded commercial/residential building; gabled roof; 1/1 sash; storefront has cornice, display windows; glazed and panelled doors and transoms; residential entry has glazed, panelled door; transom
119		c. 1865	Three-story, four-bay brick commercial/residential building; low-pitched gable roof, bracketed cornice and decorative frieze; 2/2 sash; arched stone lintels with keystones; altered storefront with new pent roof and fenestration.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
153		c. 1910	Two-story, multi-bay, stone institutional building; circular building; flat roof with parapet; full basement; denticulated cornice; frieze has "BPO Elks"; Doric pilasters; 1/1 windows; some embraced by pilasters, arched labels with keystones and panelling; rear, four-story, brick section; entry in rear has portico with denticulated cornice and Tuscan columns, glazed and panelled door; good condition.
157		c. 1845	Three-story, three-bay residence; asbestos siding; gabled roof and plain cornice; 1/1 windows; full basement with panelled entry; flush-board door; storefront bricked up; good condition.
159 - 61		c. 1845	Two attached three-story, three-bay commercial/residential building; flat roof and plain cornice; 161 has simple frieze; asbestos siding and permastone new 1/1 sash; obscured windows; store front with recessed entries, display windows; residential entries with panelled and glazed doors and sidelights.
163		c. 1845, c. 1950	Three-story, three-bay, shingled commercial/residential building; irregular roofline and molded cornice; 1/1 and third story; two-story, modern brick projecting addition with flat roof, plate-glass windows and new door; non-contributing.
165		c. 1885	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels and water table; panelled entry with double, glazed and panelled door; transom with small panes of glass around outer perimeter; good condition.
167		c. 1865	Two-and-one-half-story, three-bay brick residence; cross-gabled roof with bargeboard; exposed rafters, gable returns and bracketed cornice, brick belt courses and stone water table; 2/2 windows in arched recessed; recessed, double, glazed and panelled door with transom; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u> 169	c. 1845	Two-and-one-half-story, three-bay, brick residence; gabled roof, bracketed cornice and panelled frieze; gabled dormer 1/1 windows; stone sills and lintels; water table; transom and new panelled door; rock-faced cinderblock landing; good condition.
	169½	c. 1945	Two-story, two-bay, commercial building flat roof; aluminum sided and brick; modern windows and doors; non-contributing
	171	c. 1855	Two-and-one-half-story, three-bay commercial building; tarpaper sided; gabled roof; eyebrow and 1/1 windows; store front altered; good condition.
	173	c. 1855	Two-story, three-bay commercial/residential building; gabled roof and plain cornice; asbestos siding; 1/1 windows; storefront has recessed entry with glazed and panelled door; residential entry is modern; good condition
	175	c. 1880	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 and 2/2 windows; stone sills, lintels and water table; full-height, five-sided bay; double, glazed and panelled doors with transom; stone landing; old cast iron stair rail; good condition.
	177	c. 1865	Two-and-one-half-story, two-bay, brick residence; flat roof, denticulated cornice and plain frieze; eyebrow and 1/1 windows; stone sills, lintels, water table; glazed and panelled door; hood with mansard roof, crest rail and brackets; wooden steps; good condition.
	179	c. 1865	Two-story, three-bay, brick residence; flat roof and denticulated cornice; 1/1 windows; radiating voussoirs and stone sills; water table; glazed and panelled door with transom; wooden landing; good condition.
	181	c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and decorative frieze; obscured windows and doors; stone sills and lintels, water table; two-story, rounded bay; porch has bracketed cornice and straight spindles, turned balusters and ornate brackets; good condition.

## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
	183	c. 1890	Two-story, two-bay, brick residence with mansard roof; full-height, round tower with polygonal roof, third story has bands of windows with columns, singling and panelled frieze; metal cornice; flat roofed dormer; 1/1 and stained glass windows, stone sills and lintels; double, glazed and panelled doors; porch has turned members; good condition.
	185	c. 1855	Two-and-one-half-story, three-bay, brick residence; multi-gabled slate roof with bargeboard and gabled dormers; arched, single and paired 1/1 windows; stone sills and lintels; one-story, five-sided, frame bay with bracketed cornice and panelling; porch has plain cornice, decorative frieze; chamfered columns and turned balusters; modern door and landing; good condition.
	189	c. 1865	Two-story, three-bay, brick residence with mansard roof; bracketed cornice, panelled frieze and hooded dormers; 2/2 windows; stone sills, lintels and water table; stone landing with cast iron railing; glazed and panelled door; mansard hood with simple bracketes; good condition; contributing carriage house.
	191	c. 1865	Two-story, three-bay, brick residence with mansard roof; bracketed cornice, panelled frieze and hooded dormers; 2/2 windows; stone sills, lintels and water table; double, glazed panelled doors with transom; portico with mansard roof, denticulated cornice, panelled square columns, brackets, bargeboard wooden stairs; good condition.
	193	c. 1845	Two-and-one-half-story, four-bay residence; tarpaper sided; gabled roof with shed dormers and exposed rafters; 6/1, 1/1 and 4/4 windows; heavy lintels; one-story, three-sided bay with bracketed cornice; portico has denticulated cornice, Tuscan columns, turned balusters, double, glazed and panelled doors with transom; good condition.

## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
	197	c. 1880	Two-story, three-bay, brick residence; with mansard roof, bracketed cornice and panelled frieze; and flat-roofed dormer; five-sided, two-story bay has polygonal top; bay and dormer with conical roof; stone sills and lintels, latter have twisted rope-type trim; porch has denticulated cornice and Tuscan columns; new flush-board door; good condition.
	201	c.1880	Two-story, four-bay, brick residence with mansard roof, bracketed cornice, panelled frieze and hooded dormers; five-sided, three-story bay has flat roof; lintels have twisted rope-type trim; 1/1 and 2/2 windows; double, glazed and panelled doors with transom; porch has bracketed cornice, chamfered columns, brackets, bargeboard, balusters; good condition.
	203	c. 1880	Two-story, two-bay, brick residence with patterned slate mansard roof and full basement; bracketed cornice, panelled frieze and hooded dormers; 1/1 and 2/2 windows; five-sided, two-and-one-half-story bay; stone belt course and water table; lintels have rope-type trim; entry partially bricked in; glazed and panelled door and transom; main entry in basement; good condition.
	205	c. 1880	Two-story, two-bay, brick residence with slate mansard roof and full basement; bracketed cornice, panelled frieze and hooded dormers two-and-one-half-story, five-sided bay; stone belt courses and water table; lintels are stone with twisted rope-type trim; brown-stone landing with cast iron railing; double, glazed and panelled doors, transom, panelled entry; good condition.
	207	c. 1885	Two-story, five-bay, brick residence with patterned slate mansard roof; bracketed cornice, plain frieze and hipped dormer; round tower with conical roof; squared bay with pointed roof; shingled and panelled, three-sided bay; terra cotta panel, double, panelled doors and transom; portico with bracketed cornice, decorative frieze and turned members; 1/1 windows; stone sills and decorative lintels; good condition.

## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
	217	c. 1920	Two-and-one-half-story, nine-bay, brick post office; gambrel roof with parapets at ends; classical cornice and cupola and gabled domers; quoining and decorative swags; 1/1 and arched windows with keystones; classical, stone door surrounds with plate-glass door and transoms; very good condition.
	229	c. 1845	Two-story, three-bay, asbestos-sided residence; low-pitched gable roof; bracketed cornice and decorative frieze; 6/6 windows; classical door surround with recessed transom, sidelights and panelled door; wooden stairs; good condition.
	231	c. 1895	Three-story, two-bay, brick residence; flat roof with mansard front and cross gables; two-story, three-sided bay; 1/1 and 2/2 windows; rock-faced stone lintels, sills and belt course and water table; second story balustrade; recessed entry with glazed and panelled door; two-story, three-sided, frame bay on side; good condition.
	233	c. 1855	Three-and-one-half-story, three-bay, brick residence; cross-gabled roof with exposed rafters; arched 4/4 and French windows with heavily molded labels; recessed entry with panelled door; rear, two-story wind with same ornament; good condition.
	237	1861	One-and-one-half-story, three-bay, brick church; central, four-story, bell tower with broach spire; smaller, square tower atright; shallow transepts with finials; pointed-arch windows, some with labels; buttresses; water table; decorative wooden doors; (addition about 1960)
			Two-story, multi-bay, modern, brick parish house; flat roof; modern windows and doors; excellent condition; non-contributing.
	257	c. 1865	Two-and-one-half-story, three-bay, brick residence; patterned slate cross gabled roof with exposed rafters and gabled domer; 6/6 and pointed-arch window; stone sills and lintels and water table; one-story, five-sided bay has bracketed cornice; new flush-board door, enclosed transom; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
261		c. 1845	Two-story, three-bay, clapboarded residence; gabled roof; 2/2 windows; portico has denticulated cornice, turned members; wooden steps; panelled door with transom and sidelights; raise basement; good condition.
263		c. 1880	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; five-sided, three-story bay; 2/2 windows; stone sills, water table and lintels with twisted rope-type trim; double, glazed and panelled doors; stone landing with cast iron railing; good condition.
265		c. 1870	Two-story, two-bay, brick residence with mansard roof; hooded dormers; bracketed cornice and panelled frieze; 2/2 windows; stone water table, sills, lintels with twisted rope-type trim; double, glazed and panelled doors; stone landing with cast iron stair rail; good condition.
267		c. 1870	Two-story, two-bay, brick residence with mansard roof; bracketed cornice, panelled frieze and hooded dormers; two-and-one-half-story, five-sided bay; 2/2 windows; stone sills and lintels with twisted rope-type trim; door obscured; brownstone landing has cast iron railing; good condition.
269		c. 1905	Two-and-one-half-story, two-bay residence; gabled slate roof with gabled dormer; shingled and brick; gabled bay with shallow rounded bay on second story; glazed and panelled door; gabled portico with Tuscan columns and turned balusters; good condition.
271		c. 1900	Two-and-one-half-story, three-bay, brick residence; hipped roof with cross gables and gabled dormers; full-height Doric pilasters; gabled projection at right with pediment and fanlight; bracketed cornice; glazed and panelled door; balustrade above classical porch with Tuscan columns and turned balusters; 1/1 windows; stone water table, sills and lintels with keystones; good condition.
273		c. 1905	Two-and-one-half-story, three-bay cobblestone residence; gambrel roof; 1/1 windows with stone sills and lintels; one-story, three-sided front bay has door opening onto balcony; glazed and panelled door; porch with square posts and plain railing; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
	279	c. 1870	Two-story, five-bay residence with full basement and slate mansard roof; gabled dormers. bracketed cornice and panelled frieze; 2/2 windows; stone sills, lintels with keystones, belt course and water table; stone and brick landing with cast iron stair rail; glazed and panelled door with arched transom and sidelights; good condition.
	283	c. 1870	Two-story, four-bay, brick residence with patterned slate mansard roof and full basement; gabled dormers, bracketed cornice and panelled frieze; 1/1 and stained glass windows; stone sills, lintels with keystones; belt course and water table; stone landing with cast iron railing; rounded porch on north elevation has bracketed cornice, fluted square posts and turned balusters; double, glazed and panelled doors with arched transom; brownstone door surround with keystone; rear addition and alterations for use as YWCA.
	291	c. 1870	Two-story, five-bay, brick residence with slate patterned mansard roof and full basement; hooded dormers, bracketed cornice and panelled frieze; pavillion has elaborate window, second story; double, glazed and panelled doors with elaborate door surround: arched hood, panelling and brackets; stone landing with cast iron stair rail; 2/2 windows; arched lintels and stone sills and belt course; good condition.
	295 - 301	c. 1870	Four attached three-story, three-bay brick row houses, raised basement; flat roof, bracketed cornice and panelled frieze; 1/1 and 2/2 sash; arched brick lintels and stone sills and water table; five-sided, three-story bay and three one-story bays; landings with cast-iron rails; double, glazed and panelled doors with transoms.
	303	c. 1865	Three-story, four-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills and lintels; altered storefront with metal panel, vertical-board siding and new fenestration; good condition.
	305	c. 1865	Three-story, four-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 6/6 and 6/1 windows; stone sills and lintels; residential entry has double, panelled doors; storefront: display windows with panelling,

## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
	305 (cont'd.)		recessed entries with glazed, panelled doors; good condition.
307		c. 1865	Two-and-one-half-story, five-bay, brick commercial/residential building; low-pitched gable roof, bracketed cornice and panelled frieze; large, metal shed dormer; 2/2 windows; arched brick lintels and stone sills; storefront: recessed entry, transom, obscured door, cast iron columns, panelling, display windows; residential entry has panelled door with multi-pane transom; at left is garage entry; good condition.
309		c. 1850	Two-story, three-bay, brick residence; flat roof and bracketed cornice; stone water table, sills and lintels; 1/1 and missing windows; door obscured; portico with bracketed cornice, turned columns, solid wood railing; good condition.
311		c. 1885	Three-story, two-bay, brick residence; low-pitched gable roof, bracketed cornice and panelled frieze; five-sided, three-story bay; raised basement; transom and new panelled door and one sidelight; good condition.
313 - 15		c. 1900	Two-story, eight-bay, brick commercial/residential building; flat roof; stepped parapet with cement band; horizontal brick panel; single and paired 6/1 windows; stone sills and lintels; first story, bracketed cornice; storefronts: display windows; recessed entries with glazed and panelled doors, transoms; garage bay; residential entry with glazed and panelled door and transom; good condition.
317 - 21		c. 1845	Three attached two-and-one-half-story, three-bay, brick commercial/residential buildings; gabled roof; bracketed cornice (one on #321 removed); eyebrow windows; 2/2 sash; stone lintels, sills and water table; projecting storefront on first story has panelled frieze, simple cornice, display area with new fenestration; obscured and panelled door with transom; one shed-type canopy with brackets (319).
325		c. 1850	Three-story, three-bay brick commercial/residential building; low-pitched gable roof and molded cornice; obscured windows and doors; first-story cornice and storefront with recessed entry.



## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
	327-329	c. 1890	Three-story, five-bay, brick commercial/residential building; flat roof; parapet, bracketed cornice and decorative frieze; 2/2 windows; altered storefront with changed fenestration; good condition.
	333	c. 1850	Two-story, three-bay, brick commercial/residential building; flat roof and bracketed cornice; 2/2 windows; double, radiating voussoirs; panelled door; central bay bricked in with new door; good condition.
	339 - 41	c. 1915	Two-story, five-bay, brick industrial structure; flat roof and stepped parapet; recessed tiered brick window surrounds; openings in-filled with brick.
	343	c. 1880	Three-story, four-bay, brick commercial/residential building; flat roof and bracketed cornice; 1/1 windows; altered storefront with display windows and recessed, glazed and panelled door; residential entry has panelled door; good condition.
	345 - 47	c. 1880	Three-story, four-bay brick double residence; low-pitched gable roof, bracketed cornice and decorative frieze; 1/1 sash; stone lintels, sills and water table; two full-height rounded bays; glazed and panelled doors; bracketed porch with pediment and turned members; white brick veneer.
	353 - 55	c. 1880	Three-story, four-bay, brick double residence; low-pitched gable roof; bracketed cornice and decorative frieze; 1/1 sash; stone lintels, sills and water table; two full-height rounded bays; glazed and panelled doors; bracketed porch with pediment and turned members.
	357 - 61	c. 1870	Two attached two-story, four-bay brick double row houses; low-pitched gable roof and bracketed cornice; 1/1 sash; double, segmental arches; stone sills and water table; glazed and panelled doors; one shed-type hood and one bracketed portico with turned members; flat roofed, brick storefront projection.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
	365-381	c. 1870	Four attached two-story, four-bay, brick double row houses; low-pitched gable roof and bracketed cornice; 1/1 sash; windows with segmental arches in two tiers; stone sills and water table; glazed and panelled doors; shed-type hoods (365-67).
	383-341	c. 1870	Ten attached two-story, four-bay brick double row houses; low-pitched gable roof and bracketed cornice; 1/1 sash; windows with segmental arches in two tiers; stone sills and water table; glazed and panelled doors; shed-type hoods (295-297) and bracketed porch with pediment and turned members (419-421).
	Mount St. Mary's Academy	c. 1865	A finely detailed Gothic-Revival-style estate, the complex is unique in the city for its Queen Anne-style carriage house and Gothic-style support structures. The residence's picturesque nature is derived from its irregular plan and massing. One-and-one-half- to three-stories tall and eight bays wide, the residence presents a variety of roof styles: gabled, hipped, flat, pyramidal and tent. The central tower has a bracketed cornice and trefoil-ornamented frieze. There is a projecting bay with Gothic-style decoration. The dormers and cross-gables have barge boards, and the arcaded porches are embellished with Gothic motifs and a decorative balustrade. There is an octagonal tower on the north elevation, and a square entrance bay on the east (main) facade. An oriel window is the right of the main entrance bay. The chimneys have circular chimney pots. The large, ornate carriage house is characterized by projecting window bays flared roofs, and a central cupola with a pyramidal roof.

## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
563	563	c. 1905	One-and-one-half-story, three-bay, shingled residence; gabled roof; massive, gabled dormer with returns and shallow three-sided bay; 1/1 sash; recessed classical porch with Tuscan columns; glazed and panelled door.
567		c. 1905	One-and-one-half-story, three-bay, clapboarded residence; gabled roof with massive gabled dormer; 6/6 sash; front of roof overhangs as pent roof; glazed and panelled door with sidelights.
571		c. 1905	One-and-one-half-story, four-bay, clapboarded residence; gambrel roof; massive, pedimented dormers; classical porch with Tuscan columns on solid balustrade; 1/1 sash; vestibule and glazed and panelled door; contributing garage.
575		c. 1895	Two-and-one-half-story, three-bay, clapboarded and shingled residence; gabled roof; gabled dormer with returns and Palladian-type window; second story has two shallow rounded bay; classical glazed porch with balustrade atop and Tuscan columns; glazed and panelled door; contributing garage.
577		c. 1895	Two-and-one-half-story, five-bay, brick residence; hipped roof with wide, pedimented dormer; classical entablature; 1/1 sash; windows with rock-faced sills and lintels; elaborate porch with stone foundation, grouped columns and balustrades above and below; glazed and panelled door; contributing garage.

## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
2		c. 1870	Three-story, 3-bay, brick commercial/residential building; flat roof, molded cornice and panelled frieze; 2/2 windows; arched brick lintels and stone sills; storefront: cornice, display windows; recessed entry; residential entry with panelled door and enclosed transom; good condition.
4		c. 1870	Three-story, 3-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels and smooth stone sills; storefront: cornice, recessed entry, cast iron columns, panelling; glazed and panelled doors; residential entry: double, glazed and panelled door with transom; good condition.
6		c. 1870	Three-story, three-bay residence; asphalt sided; flat roof, bracketed cornice and panelled frieze; 1/1 windows; projecting brick storefront with large window; residential entry: transom, new doors; good condition.
8		c. 1905	One-story, four-bay, brick commercial building; flat roof and bracketed cornice; recessed entry with enclosed transoms; display windows; good condition.
10 -12		c. 1890	Three-story, 4-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two two-story, three-sided bays; tarpaper-sided; #12 storefronts: recessed entry, double, glazed and panelled doors, transom, cast iron columns; display windows, some alterations; residential entry: double, glazed and panelled door with transom; good condition.
14 - 16		c. 1885	Three-story, 4-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two two-story, three-sided bays on top two stories with panelling and shingling or asbestos siding; storefronts: plain cornice, recessed entries, double, glazed and panelled door with transom, cast iron columns, panelling, display windows; residential entry: transom, one sidelight, new door or double, glazed and panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#:</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
18		c. 1885	Three-story, four-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels, two-story, three-sided bays; tarpaper siding; storefront: glazed and panelled door with transom, display windows; residential entry: double, glazed and panelled door with transom; good condition.
20		c. 1925	One-story, three-bay, brick commercial structure; flat roof with stepped parapet; recessed entry with glazed and panelled door; display windows; good condition.
22		c. 1885	Three-story, four-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 2/2 and 1/1 windows; altered storefront retains cornice, recessed entry with new door, obscured transom; good condition.
24		c. 1945	One-story, two-bay, brick commercial structure; flat roof; plate-glass window and door; good condition.; non-contributing.
26 - 34		c. 1920	One-story, 7-bay warehouse structure; brick facade and rock-faced cinder block sides; flat roof with false front; large garage door; five obscured windows; good condition.
36		c. 1870	Three-story, three-bay, brick commercial/residential building; flat roof with bracketed cornice and panelled frieze; altered 6/6 windows; radiating voussoirs and stone sills; double, glazed and panelled door; arched transom; storefront: cornice bricked up, large plate glass window cut in; good condition.
40		c. 1870	Four-story, four-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 1/1 windows; double radiating voussoirs and stone sills; storefront: altered, bricked up with new fenestration; good condition.
42		c. 1870	Four-story, five-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 2/2 windows; radiating voussoirs; storefront: denticulated cornice, recessed entry, cast iron columns, transom, obscured doors and windows; residential entry with transom; good condition.

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
	44	c. 1875	Three-story, four-bay, brick commercial/residential building; flat roof; bracketed cornice; 2/2 sash; segmentally arched windows with stone sills; storefront -- bracketed cornice; recessed entry, altered doors; cast-iron columns; panelling; residential entry -- transom, altered door; good condition.
	46	c. 1875	Three-story, three-bay brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 sash; segmentally arched windows with stone sills; enclosed storefront with new fenestration; residential entry -- altered transom, double, glazed, panelled door; good condition.
	48	c. 1875	Three-story, three-bay brick residence flat roof, bracketed cornice and panelled frieze; 2/2 sash; segmentally arched windows with smooth, stone sills; arched transom, double, glazed, and panelled doors; good condition.
	84A	c. 1930	Two-and-one-half-story, seven-bay, brick museum building; gabled roof with parapet ends; gabled dormer with tracery; 6/6, 8/8 12/12 sash; classical entablature and pediment; decorative classical stone crest, window and door surrounds; second story balcony; panelled door; excellent condition.
	84B	1750	One-and-one-half-story, fieldstone house; gabled roof; 12/12 sash; segmentally arched brick windows; ten-light transom and panelled door; gabled hood; good condition.
	84C	c. 1890	One-story, one-bay, stone memorial tower; flat roof, open arches; good condition.
	84D	c. 1940	One-and-one-half-story, three-bay stone barn; gabled roof; vertical board doors; obscured windows; good condition.
	84E	1876	Centennial Fence -- a heavy iron fence with two gates defining the Liberty St (west) and Washington St. (north) boundaries of the historic site. The fence is composed of sections of vertical spikes with decorative points braced by horizontal rails inbetween ornate rounded posts.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
	110	c. 1865	Three-story, four-bay brick commercial/residential building; gabled roof and bracketed cornice; 1/1 sash; stone lintels and sills; storefront has bracketed cornice, recessed entry, cast-iron columns, panelling; glazed and panelled doors with transoms.
	112	c. 1870	Four-story, three-bay commercial/residential building; tarpaper siding; flat roof and bracketed cornice; 1/1 and 2/2 sash; storefront has bracketed cornice, recessed, glazed and panelled door, cast iron columns, display windows; residential entry has glazed and panelled door; good condition.
	114-116	c. 1865	Two-and-one-half-story, four-bay brick residence; gabled roof and bracketed cornice; gabled bay with three-sided bay; arched gable window with bracketed gable returns; 2/2, 1/1 and 1/6 windows; stone sills; lintels and water table; double, panelled doors; good condition.
	122-124	c. 1870	Three-story, six-bay commercial/residential building; flat roof, bracketed cornice and panelled frieze; permastone and glazed brick; 1/1 sash; first-story storefront has cornice, recessed, glazed and panelled doors, cast-iron columns, transoms, panelling good condition,
	126-126½	c. 1855	Two-story, three-bay commercial/residential building; clapboard siding; flat roof, bracketed cornice and panelled frieze; 2/2 sash; storefront has bracketed cornice, display windows, glazed and panelled doors, transom, cast-iron columns, panelling; residential entry has glazed and panelled door and transom; good condition.
	128	c. 1885	Three-story, two-bay, brick commercial residential building; flat roof, bracketed cornice and panelled frieze; single and double 1/1 sash; stone sills and lintels; altered storefront.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
	152-156	c. 1960	Two-story, multi-bay, brick school; flat roof; modern windows; metal panels and doors; non-contributing.
	172-178	c. 1920	Two-story, nine-bay brick commercial/warehouse building; flat roof; stepped parapet with cement band; multi-paned windows; large display windows, metal and glass doors with transoms; good condition.
	180	c. 1880	Three-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 2/2 sash; segmentally arched brick lintels; brick sills and water table; double, glazed and panelled door; transom; panelled embrasure; wooden landing and turned balusters; good condition.
	182	c. 1880	Two-story, two-bay brick residence with patterned slate mansard roof; hooded dormers; bracketed cornice and panelled frieze; five-sided; two-and-one-half-story bay; 1/1 and 2/2 sash; stone water table, sills and lintels with twisted rope-type trim; double panelled door, transom; brownstone landing with cast-iron railing; good condition.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
	184 - 86	c. 1880	Pair of three-story, three-bay, brick commercial/residential buildings; flat roof, bracketed cornice and panelled frieze; 2/2 sash; arched brick lintels and stone sills; altered storefront: shed-type canopy, altered fenestration.
	188	c. 1880	Three-story, four-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 1/1 and 1/2 windows; stone sills and lintels; storefront: bracketed cornice, denticulated frieze, recessed double, glazed and panelled door, cast iron columns, display windows with panelling; residential entry: double, glazed and panelled doors, transom; good condition.
	190		See 119 R First Street
	200		See 120 R First Street
	206	c. 1850	Three-and-one-half-story, three-bay commercial/residential building; cross gabled roof; with exposed rafters; asbestos siding; cornice has exposed 4/4 and 2/2 windows; first story altered with changed fenestration and stucco; good condition.
	208 - 10	c. 1880	Two-story, three-bay, brick double house with patterned slate mansard roof; hooded dormers; bracketed cornice and panelled frieze; two five-sided, two-and-one-half-story bays; 2/2 windows; stone sills and lintels, water table; double, panelled doors; transom; stone landing with iron railing; good condition.
	212 - 18	c. 1930, c. 1955	Three-story, five-bay, brick commercial building; flat roof; 9/6, 6/6 and oculos windows; first story ones set in recesses with keystones; metal and glass doors; stone door surround with cornice; excellent condition.
	234	c. 1895	Three-story, three-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 1/1 windows; lintel and sills adjoined by trefoil patterned panel quoining; storefront: cornice, cast iron columns; new windows and door; new residential door; south elevation has cross gable; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
236		c. 1875	Three-story, three-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 2/2 windows in arched brownstone surrounds; stone quoining; altered storefront and residential entry; good condition.
238 - 240		c. 1890	Three-story, four-bay, brick double house; flat roof, bracketed cornice and panelled frieze; two, three-story, three-sided bays; stone watertable, sills and lintels; 1/1 windows; double, glazed and panelled doors, stone alnding with cast iron stair rail; good condition.
244		c. 1900	Three-story, two-bay, brick residence; flat roof, plain cornice and architrave; 1/1 windows; arched and straight lintels; three-story, square and three-sided bay;; double, glazed and panelled doorsl encircling porch with bracketed cornice, Tuscan columns and turned balusters; good condition.
246 -48		c. 1870	Two-story, four-bay, brick residence with patterned slate mansard roof; brakcted cornice, panelled frieze and hooded dormers; 2/2 windows; radiating voussoirs with keystones and smooth stone sills; brick belt course and stone water table; glazed and panelled door, arched transom; portico has bracketed cornice, panelled frieze and square posts on panelled piers; square bay with bracketed cornice and crest rail; good condition.
250		c. 1970	One-and-one-half-story, two-bay, modern, brick building; gabled roof with gabled dormers; 6/6 and 8/8 windows; straight brick lintels; classical entry with glazed and panelled door; very good condition; non-contributing.
252		c. 1855	Two-and-one-half-story, three-bay residence; gabled roof; aluminum sided; three-light eyebrow and 2/2 windows; glazed and panelled door; portico has chamfered columns and brackets; two-story, five-sided bay; good condition.
254		c. 1845	Three-story, three-bay residence; clapboard; low-pitched gable roof, bracketed cornice and plain frieze; 1/1 windows; glazed and panelled door, transom and sidelights; porch has denticulated cornice, Tuscan columns and turned balusters; good condition.

EAST      END      [ HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
	256	c. 1845	Two-and-one-half-story, three-bay residence; gabled roof and bracketed cornice; asbestos siding; 1/1 and eyebrow windows; glazed and panelled door; good condition.
	258	c. 1870	Three-story, three-bay, brick residence with full basement; flat roof, bracketed cornice and panelled frieze; 1/1 and 2/2 windows; stone water table, sills and lintels with twisted rope-type trim; double, glazed and panelled doors, transoms; brownstone landing with new railing; one-story, square bay with bracketed cornice; c-ch, nc-g
	260	c. 1845	Two-and-one-half-story, three-bay clapboarded residence; gabled roof and bracketed cornice; 4/4 windows; non-original double, glazed and panelled doors, transom; gabled canopy with bargeboard; spindled and brackets; wood landing with straight balusters; good condition.
	262	c. 1870	Three-story, three-bay, brick residence; low-pitched gable roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills and lintels with twisted rope-type trim; five-sided, two-story bay; stone water table and belt courses; double, glazed and panelled door, with transom, brownstone landing; good condition.
	264	c. 1845	One-and-one-half-story, three-bay residence; clapboard siding; cross-gabled roof with bargeboard; porch has chamfered columns, plain cornice, turned balusters; 6/6 sash; glazed and panelled door, transom.
	268	c. 1845	Two-and-one-half-story, three-bay, brick residence; cross-gabled, patterned slate roof with finials and gabled dormers; 1/1 windows with arched or straight lintels and stone sills and water table; double, glazed and panelled doors, transoms; encircling porch with denticulated cornice and Tuscan columns; good condition.; contributing carriage house.
	272	c. 1870	Two-story, three-bay, brick residence with patterned slate mansard roof; pedimented dormers, bracketed cornice and panelled frieze stained glass and 1/1 windows; arched lintels with keystones, smooth stone sill, belt course and water table; porch has turned members; double, glazed and panelled doors; panelled hood with mansard roof; bargeboard; stone landing has elaborate cast iron railing; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
	276	c. 1870	Two-story, two-bay, brick residence with patterned slate mansard roof; five-sided, two and one half-story bay, hooded dormers, bracketed cornice and panelled frieze; 1/1 windows; straight lintels and water table; shallow square bay with pedimented portico, slender grouped columns, stone landing and double, panelled doors; good condition.
	278	c. 1875	Two-story, two-bay, brick residence with slate mansard roof; three-story, 5-sided bay, shingled, polygonal roof; square bay with pyramidal roof; bracketed cornice; double, glazed and panelled doors; stone landing with cast iron railing; 1/1 windows; arched or straight brick lintels, stone sills and water table; good condition. cc-eh
	280	c. 1905	Two-and-one-half-story, four-bay, stuccoed residence; gabled roof with shed dormer; one-story, three-sided slate bays; multi-paned/1 windows; porch has shed roof, massive cobblestone posts and railing; glazed and panelled door; good condition.
	282	c. 1865	Two-and-one-half-story, three-bay, brick residence; gabled roof and bracketed cornice; 1/1 windows; arched lintels, stone sills and water table; double, glazed and panelled doors, arched transom, twisted rope-type trim; stone steps with cast iron railing; good condition.
	284	c. 1865	Two-and-one-half-story, three-bay, brick residence; raised basement; gabled roof, bracketed cornice and hooded dormers; 6/6 windows; arched lintels and stone sills; double doors, arched transom, twisted rope-type trim; good condition.
	286	c. 1870	Two-story, three-bay, brick residence with patterned slate mansard roof; hooded dormers, bracketed cornice and panelled frieze; 1/1 windows; arched lintels, stone sills and stone water table; glazed and panelled double doors, transom and molded and bracketed label; brownstone landing with cast iron stair rail; good condition. c-ch

EAST      END      HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
288		c. 1870	Two-story, three-bay, brick residence with patterned slate mansard roof; hooded dormers; bracketed cornice and panelled frieze; 6/6 windows; arched lintels, stone sills and water table; glazed and panelled door, arched transom and molded and bracketed label; brownstone landing with cast iron stair rail; good condition; non-contributing garage.
290		c. 1900	Two-story, two-bay, brick residence with patterned slate mansard roof, hooded dormer, bracketed cornice and panelled frieze; five-sided, three-story bay with flat roof; glazed and panelled door with transom; 2/2 windows; stone sills and lintels and water table; landing with cast iron stair rail; good condition.
292		c. 1875	Two-story, two-bay, brick residence with polychrome, patterned slate mansard roof; bracketed cornice, panelled frieze and ornate hooded dormers; French and 1/1 windows with heavy, arched stone labels, cast iron canopy over second story double window; porch has slate mansard roof, panelled, chamfered columns and straight railing; double, glazed and panelled door; good condition.
294 - 96		c. 1895	Two-story, four-bay, brick, double house with mansard roof; shed dormer and bracketed cornice; five-sided, two-story bay with flat roof and crest rail, panelled gable above; square, two-story bay with flat roof and crest rail, pointed roof; decorative terra cotta panels; glazed and panelled doors; 1/1 and 2/2 windows; arched lintels, rock-faced stone sills and water table; good condition.
298 - 300		c. 1895	Two-story, four-bay brick double residence with mansard roof; flat-roofed dormer, bracketed cornice and plain frieze; 1/1 sash; stone sills, lintels, water table; glazed and panelled doors; square bays with gabled, pointed roofs atop; three-sided bay with mansard roof brownstone landing.
326		c. 1840	Two-story, three-bay residence; clapboarded; gable roof; obscured windows, entry has shed-roof canopy; fair condition.
330		c. 1865	Three-story, four-bay, brick residence; flat roof and bracketed cornice; windows missing; stone sills and lintels; storefront; bracketed and denticulated cornice; cast iron columns

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u> 330 (cont'd.)		obscured central entry and display windows; residential entry: double, glazed and panelled doors with transom; good condition.
332		c. 1865	Three-story, 3-bay, brick commercial/residential building; flat roof and bracketed cornice; 1/1 windows; arched brick lintels; altered storefront; modern, panelled garage door; glazed and panelled door with transom; good condition.
334		c. 1855	Three-story, three-bay commercial/residential building; gabled roof and bracketed cornice; 6/6 and 1/1 windows; stone sills and lintels; projecting, altered storefront; residential entry; glazed and panelled door with transom; good condition.
338		c. 1880	One-story, two-bay, brick carriage house; cross-gabled roof; loading door and two garage doors; fire damaged.
344		c. 1880	Two-story, three-bay, brick carriage house; flat roof and bracketed cornice; second story windows and door altered; new garage door; fire damaged.
346 - 48		c. 1880	Three-story, six-bay brick double residence; flat roof, bracketed cornice and panelled frieze; 2/2 sash; arched brick lintels and stone sills and water table double, glazed and panelled doors; arched transoms; cast-iron columns and panelled embrasures.
352		c. 1950	One-story, three-bay filling station; flat roof; cinder block; two-garage bays; central entry and display window; non-contributing
354 - 60		c. 1905	One-story, ten-bay, brick warehouse building; flat roof; stepped decorative parapet, brick pilasters; sealed and multi-paned industrial windows; obscured entires; decorative brick panels and bands; good condition.
362		c. 1880	Three-story, four-bay, brick commercial/residential building; low-pitched gable roof; bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; storefront: double, glazed and panelled door, enclosed transom; cast iron columns, display windows; residential entry: glazed and panelled door, sidelights and transom; good condition.

## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
364		c. 1855	Three-story, three-bay, brick residence; altered gable roof; 6/1 windows; stone sills and lintels and water table; new flush-board door; good condition. nc-g
366		c. 1855	Two-and-one-half-story, three-bay, brick residence; gabled roof and wide, flat-roofed dormer; 1/1 and missing windows; stone sills, lintels and water table; portico has shed roof with bargeboard; glazed and panelled door; good condition.
368		c. 1880	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels and water table; three-story, rounded bay; double, glazed and panelled door with transom; mansard hood with crest rail; turned spindles and brackets; good condition.
370		c. 1880	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels and water table; rounded, second story bay, glazed and panelled door; good condition.
372		c. 1870	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills and lintels; five-sided, two-story bay; porch has Tuscan columns and straight balusters; double, glazed and panelled doors with transom; good condition.
374		c. 1870	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 6/6 windows; arched brick lintels and stone sills; porch has straight posts and baluster double, glazed and panelled doors; transom; good condition.
376		c. 1880	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; carved stone lintels and sills; double, glazed and panelled doors, transom; good condition.
378		c. 1855	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 and 1/1 windows; arched brick lintels, stone sills and brick water table; double, glazed and panelled doors; arched transom; good condition.

## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
	380	c. 1855	Two-story, three-bay, brick residence; flat roof and bracketed cornice; 1/1 windows; arched brick lintels, stone sills and brick water table; transom and new glazed and panelled door; good condition.
	382	c. 1850	Two-story, three-bay residence; clapboard siding; low-pitched gable roof; 2/2 windows; modern, glazed and panelled, double door and new landing; good condition.
	384	c. 1840	Two-and-one-half-story, three-bay residence; stuccoed; gabled roof, bracketed cornice and panelled frieze; eyebrow and 1/1 windows; stone sills and lintels; portico has turned spindles and square posts, ornate brackets; transom, sidelights and glazed and panelled door; good condition.
	388	c. 1835	One-and-one-half-story, three-bay residence; gabled roof; aluminum siding; 3/3 and 6/6 windows; panelled door, transom, portico has straight posts and lattice-like woodwork; good condition.
	392	c. 1965	One-story, three-bay, modern, brick residence; gabled roof; aluminum-sided; built-in garage; non-contributing.
	394	c. 1835	Two-and-one-half-story, three-bay, clapboarded residence; gabled roof, molded cornice and plain frieze; 6/6 windows; panelled door with transom and sidelights; portico has straight spindles, columns and balusters, hipped roof; good condition.
	396	c. 1835	Two-and-one-half-story, three-bay residence; gabled roof and bracketed cornice; aluminum sided; 6/6 windows; glazed and panelled door, transom; gabled portico with paired Tuscan columns and brick landing; good condition.
	402	c. 1855; c. 1880	One-and-one-half-story, multi-bay, brick carriage house; gambrel roof with clipped gable; wooden landing and regular doors; small and oculos windows; good condition.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
410		c. 1835	Two-story, three-bay residence; aluminum-sided; gabled roof; 1/1 windows; porch has new straight posts and balusters; glazed and panelled door; good condition.
412		c. 1910	Two-and-one-half-story, two-bay, brick residence; gabled roof with shingled pediment; 6/1 windows with straight brick lintels; porch has shingled balustrade atop denticulated cornice, panelled flared posts on solid brick railing; new, double, glazed and panelled door; good condition.
416		c. 1910	Two-and-one-half-story, three-bay, brick residence; hipped roof with hipped dormer; 6/1 windows; porch has flared posts on brick piers and turned balusters; double, glazed and panelled doors; good condition.
428		c. 1920	Three-story, three-bay, brick apartment house; flat roof with parapet and balustrade; projecting pavillion; single and paired 1/1 windows; centry entry: fluted columns and decorative capitols, balustrade atop it; transom, double doors; triple French doors with arched transoms and brick lintels with keystones; brick belt course; good condition.
430		c. 1915	Two-and-one-half-story, three-bay residence; hipped roof with hipped dormer; shingled; brick quoining and window surrounds; paired and single windows w, 1/1 sash; panelled door with sidelights; portico has shingled balustrade atop square posts.
432		c. 1915	One-story, four-bay, stuccoed residence; flat roof with parapet; portico with rounded balustrade, turned balusters and denticulated cornice; fluted pilasters flank glazed panelled door with sidelights; fanlight with tracery; arched French windows have hoods; good condition.
440		c. 1915	One-and-one-half-story, four-bay shingled residence; hipped roof; gabled dormers with fanlight; glazed and panelled doors; leaded glass windows; porch has flared posts on stone piers and straight balusters; stone chimney; good condition.; nc-g
442		c. 1915	Two-and-one-half-story, three-bay shingled, residence; hipped slate roof with hipped dormer; paired and triple 1/1 windows; glazed and panelled door; portico with

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
	442 (cont'd.)		hipped roof and Tuscan columns; good condition.
446		c. 1915	Two-and-one-half-story, three-bay residence; asbestos siding; gabled roof is pedimented; windows with tracery in upper sashes; new, glazed and panelled door; porch has Tuscan columns and straight balusters; three-sided bay on first story; good condition.
450		c. 1915	One-and-one-half-story, three-bay, stuccoed residence; gabled roof; half-timbering; shed dormer with cross gables; 6/1 windows; front eave extends over porch with flared posts, stuccoed piers and straight balusters; glazed and panelled door; good condition.
456		c. 1925	Two-and-one-half-story, three-bay, shingled residence; gabled roof; 6/1 windows; glazed, panelled doors with fluted pilasters and sidelights; portico has Tuscan columns; good condition.
458		c. 1915	Two-and-one-half-story, three-bay residence; hipped roof with gabled dormer; paired and single 6/1 windows; glazed and panelled door with sidelights; porch has Tuscan columns and straight balusters; shingled and stuccoed; two, square, one-story bays; good condition.
462		c. 1915	Two-and-one-half-story, three-bay residence; hipped roof with gabled dormers; vinyl sided; multi-light/1 or 1/1 windows; classical pediment over glazed and panelled door; good condition.
464		c. 1915	Two-story, two-bay residence; hipped roof; shingled and clapboarded; glazed and panelled door; 6/1 windows; porch has flared posts on stucco piers and straight balusters south elevation: one-story, square bays; good condition.
468		c. 1915	Two-and-one-half-story, two-bay residence; gabled roof and hipped dormer and bracketed cornice; shingled and stuccoed; second story square bay; glazed and panelled door; diamond-paned and stained-glass and 1/1 windows; porch has Tuscan columns on stuccoed piers and straight balusters; good condition.

## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
	476	c. 1915	Two-and-one-half-story, four-bay residence; hipped roof with bracketed cornice and hipped dormers; shingled and stuccoed; single and paired 1/1 windows; porch has upper balustrade, Tuscan columns on shingled railing and denticulated cornice; glazed and panelled doors; oval windows with tracery; good condition.
	478	c. 1915	Two-and-one-half-story <sup>22</sup> , three-bay residence; hipped slate roof with hipped dormer; shingled and stuccoed; paired 6/1 windows; large, glazed and panelled door with sidelights; porch has plain frieze, Tuscan columns and straight balusters; good condition.
	480	c. 1915	Two-and-one-half-story, three-bay residence; hipped roof with hipped dormer; shingled and clapboarded; porch has plain cornice and frieze; flared posts on brick piers and straight balusters; single, paired and triple 6/1 windows; glazed and panelled door; good condition.
	482	c. 1915	Two-and-one-half-story, two-bay residence; hipped roof with hipped dormers; shingled and permastone; three-sided, two-story bay with hipped roof; porch is recessed; new glazed and panelled door; 6/1 windows; good condition.
	484	c. 1915	Two-and-one-half-story, three-bay residence; gabled roof with returns; paired and single 6/1 windows; shingled and aluminum-sided; portico has gabled roof with returns, flared posts; glazed and panelled door; good condition.
	488	c. 1915	Two-and-one-half-story, three-bay stuccoed residence; hipped slate roof with hipped dormer; 12/1, 4/1, 9/1 and casement windows; one-story, three-sided bay; glazed and panelled door; portico has pedimented roof and Tuscan columns on stuccoed railing; stone belt courses; good condition.
	488 Rear (on Nicoll)	c. 1915	One-story, one-bay, stone garage; hipped roof; panelled doors; contributing.
	490	c. 1915	Two-and-one-half-story, three-bay residence; gabled roof; aluminum sided; paired and single 6/1 windows; enclosed portico with hood; fluted columns with Tuscan capitals; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
	492	c. 1915	One-and-one-half-story, three-bay residence; aluminum siding; gambrel roof with wide shed dormer; single and triple 6/6 windows; gabled portico has fluted columns with Tuscan capitals; glazed and panelled door with sidelights; good condition.
	496	c. 1880	Two-story, three-bay, brick residence; with mansard roof; bracketed cornice; gabled dormers with segmental stone panels; one-story, three-sided frame bay; glazed and panelled door with sidelights (second sidelight altered); rock-faced stone lintels and water table; right square section projects; window with leaded glass; brick and stone landing; good condition. nc-g
	498	c. 1880	Two-story, two-bay rock-faced stone residence with mansard roof; gabled dormers; third story porch with arched windows and turned columns; two-story, rounded bay with cast iron columns; segmental stone arch; fanlight and glazed and panelled door, sidelights; single and triple 1/1 windows; fire damaged; non-contributing garage.
	500	c. 1915	Two-and-one-half-story, three-bay residence gabled roof with returns; aluminum sided; 6/1 windows; glazed and panelled door; gabled portico with new straight posts; good condition.
	504	c. 1915	Two-and-one-half-story, three-bay residence hipped roof with large gabled dormer; paired, triple and singled 6/1 windows; aluminum sided; porch has Tuscan columns on solid railing; glazed and panelled door; good condition.
	506	c. 1885	Two-story, two-bay, brick residence with mansard roof; slate, hipped dormers; bracketed cornice and panelled frieze; 1/1 windows; cast iron columns, stone sills and lintels; five-sided bay, two-story bay; porch has brackets, turned members and brackets; recessed entryway; c-ch
	508	c. 1875, c. 1900	Two -story, three-bay brick residence with mansard roof; bracketed cornice, panelled frieze and gabled dormers; 1/1 windows; stone sills and lintels; five-sided, one-story bay has panelling and bracketed cornice and cast iron columns; porch has bracketed cornice and turned members,

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Liberty Street</u>		
	508 (cont'd.)		ornate brackets; double, panelled door with transom; buff brick veneer added; c-g
	510 - 12	c. 1915	Two-and-one-half-story, four-bay residence; hipped roof with hipped dormer; aluminum-sided; 6/1 and small square windows; glazed and panelled doors; glazed porch; good condition.
	514	c. 1875	Two-story, three-bay, brick residence; mansard roof, gabled dormer, bracketed cornice and panelled frieze; full-height, three-sided bay with polygonal roof; panelling; 1/1 and arched windows; stone lintels and sills; cast iron columns; glazed and panelled door; portico has bracketed cornice, turned columns; good condition.
	516	c. 1915	Two-and-one-half-story, three-bay residence aluminum sided; gabled roof; paired and single 6/1 windows; glazed and panelled door and sidelights; gabled portico with flared posts; good condition.
	520	c. 1915	Two-and-one-half-story, three-bay residence gabled roof; shingled and clapboard; paired and triple 6/1 windows; gabled vestibule with classical door surround; fluted pilasters and glazed and panelled door; good condition.
	526	c. 1895	Two-story, two-bay, brick residence; low-pitched gable roof; bracketed cornice and rope-type trim on frieze; rounded, two-story bay; 2/2 windows; rock-faced stone sills, lintels and water table; double, glazed and panelled door; good condition.
	530		See 54 R LeRoy Place
	536		See 60 R LeRoy Place
	546		See 74 R LeRoy Place
	552		See 76 R LeRoy Place

EAST      END      HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South Liberty St.</u>		
1 - 5		c. 1890	Two-and-one-half-story, six-bay, brick commercial/residential building; slate hipped roof; east elevation: tall gabled false front with stone bands and round arched windows; porch with hipper roof, shingled round bay with conical roof; quoining; period storefronts; good condition.
9 - 11		c. 1890	Two-story, six-bay, brick double residence; flat roof; bracketed dentil cornice and panelled frieze; 1/1 sash; rock faced stone sills and lintels; two two-story, rounded bays; narrow, arched stained-glass windows; double, glazed and panelled doors with transoms; stone landing..
13 - 15		c. 1890	Two-story, four-bay brick double residence; flat roof, bracketed cornice and panelled frieze; 1/1 sash; rock-faced stone sills and lintels; porch has denticulated cornice and Tuscan columns, turned balusters; two rounded bays; glazed and panelled doors; south elevation: one-story, square clapboarded bay.
13 - 15 Rear (on Carson)		c. 1905	One-story, one-bay, brick garage; flat roof; panelled garage door; non-contributing.
17		c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; rounded bay with conical roof; 1/1 windows; rock-faced stone sills and lintels; encircling porch has fancy dentils, elaborate turned members and brackets; double, glazed and panelled door; decorative terra cotta panel on north elevation; good condition.
19		c. 1890	Two-story, two-bay, brick residence; flat roof; bracketed dentill cornice and panelled frieze; 1/1 windows; stone sills and lintels; decorative brickwork; three-sided, two-story bay; raised basement; entry and landing altered; good condition.
21 - 29		c. 1890	Five attached two-story, two-bay brick row houses; flat roof; aluminum sided and bracketed cornice; panelled friezes 1/1 sash; stone lintels and sills; five 3-sided two-story bays; altered entries

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South Liberty St.</u>		
31		c. 1890	Two-and-one-half-story, three-bay residence; cross-gabled roof; asbestos siding; 1/1 windows; pedimented gables with brackets; double, glazed and panelled doors with transom; porch has lattice ornamentation; turned columns, turned and straight balusters; good condition.
35		c. 1890	Two-and-one-half-story, three-bay residence; cross-gabled roof; asbestos siding; 1/1 and 2/2 windows; double, glazed and panelled doors; encircling porch has denticulated cornice, turned members; two-story bay on north elevation; good condition.
37		c. 1890	Two-and-one-half-story, two-bay residence; cross-gabled roof with shed dormer; tarpaper and vinyl siding; pedimented gable with returns and fanlight; 1/1 windows; porch has denticulated cornice, turned members; three-sided bay on first story; glazed and panelled door; good condition.
41		c. 1890	Two-and-one-half-story, two-bay residence; aluminum sided; multi-gabled; two-story, three-sided bay; square tower with pyramidal roof; 1/1 windows; glazed and panelled door; encircling porch has Tuscan columns and solid balustrade; good condition.
43		c. 1890	Two-and-one-half-story, two-bay residence; aluminum siding; cross-gabled roof; first - story, three-sided bay; 1/1 and small multi-paned windows; porch has plain cornice, Tuscan columns on piers, straight balusters; glazed and panelled door; good condition.
45		c. 1890	Two-and-one-half-story, three-bay clapboarded residence; gabled roof with returns and bracketed cornice; 1/1 windows; porches have denticulated or bracketed cornice, turned or Tuscan columns, decorative balustrade or turned balusters; double, glazed and panelled door with transom; one-story, three-sided bay fluted pilasters and panelling; good condition.
47		c. 1890	Two-and-one-half-story, three-bay, brick residence; cross-gabled roof with shingled pediment; denticulated cornice; encircling porch has denticulated cornice; turned members and brackets; 1/1 and 2/2 windows; stone sills and lintels; glazed and panelled door, narrow round arched window with multi-paned glass; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#:</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South Liberty St.</u>		
	47 Rear (on Courtney)	c. 1910	One-story, two-bay garage; clapboarded; gabled roof; vertical board garage doors; good condition.; non-contributing garage.
	49	c. 1890	Two-and-one-half-story, three-bay asbestos-sided residence; cross-gabled roof with elaborate bargeboard; second story, three-sided bay with fluted pilasters and panelling; porch with pedimented panelling, bracketed cornice; bargeboard, brackets and turned members; double, glazed and panelled doors, transom with stained glass; good condition.
	49 Rear (on Courtney)	c. 1890	One-story, two-bay garage; clapboarded; hipped roof; glazed and panelled garage doors; good condition.; non-contributing garage.
	55	c. 1890	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows, stone sills and lintels; rounded, two-story bay; narrow round arched window; panelled door; porch has denticulated cornice and Tuscan columns; good condition.
	57	c. 1890	Two-story, two-bay, brick residence; flat roof and bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two-story, rounded bay; double, glazed and panelled doors with transom; portico has denticulated cornice, turned columns and balusters with brackets; good condition.
	59	c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two-story three-sided bay; porch has denticulated cornice, turned members, bracketes and straight balusters; glazed and panelled door with transom; good condition.
	61	c. 1890	Two-story, three-bay residence; brick and shingles; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two-story, three-sided bay; glazed and panelled door with transom; porch has denticulated cornice, turned members and brackets; two-story, flat-roofed, shingled bay at right; good condition.
	63	c. 1890	Two-and-one-half-story, two-bay, shingled residence with numerous alterations; mansard and gabled roof; first story bricked in; round tower with onion shaped dome; bracketed cornice and panelled frieze; glazed and panelled door, stained glass in sidelights and transom; 2/2 and 1/1 windows; good condition.



WEST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South Liberty St.</u> 63 Rear (on Henry Avenue)	c. 1905	One-story, two-bay garage; brick facade and cinder block sides; new doors; pyramidal roof; good condition.; non-contributing.
69		c. 1890	Two-and-one-half-story, four-bay, shingled and brick residence; hipped and gabled roof; bracketed cornice; 1/1 windows; round tower with conical roof; pedimented gable with arched recess; glazed and panelled door; encircling classical porch with Tuscan columns and turned balusters; good condition.
71 - 73		c. 1890	Two-story, four-bay brick double residence; flat roof and aluminum cornice; two two-story, three-sided bays; 1/1 sash; stone lintels and sills; double, glazed, panelled doors with transoms; porch with Tuscan columns, new balusters and railing;
75 - 77		c. 1890	Three-story, four-bay, brick double residence; flat roof; bracketed cornice and panelled frieze; partially sided; two, three-story, three-sided bays with cement panels and decorative brickwork; 1/1 sash; stone lintels and sills; double, glazed and panelled doors.
79		c. 1905	Two-and-one-half-story, three-bay residence; hipped slate roof with hipped dormer; rock-faced stone; second story glazed porch; 1/1 windows; double, glazed and panelled doors; porch has plain cornice, Tuscan columns and turned balusters; good condition.
79 Rear (on Beacon Street)		c. 1950	One-story, two-bay garage; rock-faced cement blocks; hipped roof; panelled doors; good condition.; non-contributing.
89		c. 1905	Two-story, four-bay residence; flat roof and plain cornice; aluminum siding and rock-faced stone; leaded-glass 9/1 windows; double, glazed and panelled doors; porch has plain cornice, Tuscan columns and straight balusters; good condition.
89 Rear (on Beacon Street)		c. 1905	One-story, two-bay garage; aluminum-sided; flat roof; half demolished; non-contributing.
91		c. 1905	Two-story, three-bay, brick residence with cobblestone facade; flat roof and plain cornice and frieze; 1/1 windows; glazed and panelled door; two-story, rounded bay; porch has square cobblestone railing posts on cobblestone railing; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South Liberty St.</u>		
	95	c. 1890	Two-and-one-half-story, two-bay brick residence; cross-gabled roof; molded cornice; 1/1 windows; rock-faced stone sills and lintels; two-story, three-sided bays; glazed and panelled door; transom; porch has plain cornice, new posts and balusters; good condition.
	8 - 10	c. 1890	Two-story, four-bay double house; brick and aluminum siding; flat roof; bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels on # 8; two, two-story, three-sided bays; double, glazed and panelled doors with transom; classical porch has Tuscan columns and turned balusters; good condition.
	12 - 16	c. 1890	Two-story, six-bay brick double residence; flat stepped, bracketed cornice and panelled fireze; two, full-height square bays, one canted; one-full-height three-sided bay; decorative panels; porch has cutwork trim; new straight posts and balusters; glazed and panelled door, 1/1 sash; stone lintels and sills
	18	c. 1905	Two-story, two-bay residence; asbestos siding; hipped roof with hipped dormer; one-story, three-sided bay; encircling porch with Tuscan columns and straight balusters; new tripartite picture window; and doorway; good condition.
	20	c. 1890	Two-story, two-bay, brick residence; flat roof; aluminum sided cornice; three-sided two-story bay; 1/1 windows; stone sills and lintels; sided porch; altered door; good condition.
	24	c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; three-sided, two-story bay; porch has plain cornice, Tuscan columns and turned balusters; double, glazed and panelled door with transom; good condition.
	28	c. 1890	Two-and-one-half-story, three-bay residence; gabled roof; tarpaper siding; cross gable with tripartite window; 6/6 and 4/4 and 1/1 windows porch has shingled pediment, Tuscan columns; glazed and panelled door with stained glass, altered transom; good condition.

## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South Liberty St.</u> 30 - 32	c. 1890	Two-story, six-bay, brick double residence; bracketed cornice and panelled frieze; partially sided; 1/1 sash; rock faced stone sills, lintels, water table full-height square bays; glazed and panelled doors and altered doors and landings.
36		c. 1890	Two-and-one-half-story, three-bay residence; vinyl siding; multi-gabled roof; stained glass, 1/1 and 4/4 windows; bay on left corner; encircling porch with pediment is sided post; glazed and panelled door; good condition.
38 - 40		c. 1890	Two-story, four-bay, brick double residence; mansard slate roof with pedimented gables; shingled or aluminum sided; denticulated cornice; two one-story, three-sided bays; 1/1 sash; rock-faced stone or straight brick lintels; terra cotta keystones; double, glazed and panelled door.
42		c. 1890	Two-story, two-bay residence; flat roof; bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two-story, three-sided bays; classical porch with straight posts and panelled balustrade; double, glazed and panelled doors; good condition.
46		1891	One-story, multi-bay church; hipped roof; aluminum and tarpaper siding; stained glass windows; wood panelled door with simple shed-roof canopy; square, corner tower with bell-shaped roof; open belfry; double, panelled door; portico with gable with shingled pediment; Tuscan columns; good condition.
52		c. 1890	Two-and-one-half-story, three-bay residence; asbestos siding; multi-gabled roof; enclosed, encircling porch, pilasters on piers; roof overhang with brackets and pendants; tower with pyramidal roof and crest rail; 1/1 windows; good condition.
52 Rear (on Courtney)		c. 1920	One-story, one-bay garage; clapboarded; glazed and panelled garage doors; gabled roof with half-timbering; contributing.
54 - 58		c. 1890	Three attached two-story, two-bay, brick row houses; flat roof; bracketed cornice and panelled frieze; 1/1 sash; stone lintels and sills; altered and glazed and panelled doors; porch has denticulated cornice, turned members and cut-work brackets; round and square bays.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South Liberty St.</u>		
	60	c. 1890	Two-and-one-half-story, two-bay residence; asbestos siding; cross-gable roof; flared, three-sided, two-story bay with brackets; porch has turned members and cutwork brackets; cast iron; 1/1 windows; glazed and panelled door; good condition.
	62 - 64	c. 1890	Two-story, four-bay, brick double residence; flat roof with aluminum-sided cornice; two-story, three-sided bays; entries: stone arches with keystones; arched transom, altered or glazed and panelled double doors; 1/1 sash with stone sills and lintels; new porches.
	68 - 70	c. 1890	Two-story, four-bay, brick double residence; partly sided with tarpaper; flat roof; bracketed cornice and rope-type trim on frieze; two-story square bay and two-story, three-sided bay; 1/1 sash; rock-faced stone sills and lintels; double, glazed and panelled doors; porch with pseudo-mansard and turned members.
	72	c. 1890	Two-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; three-sided, two-story bay; glazed and panelled door; porch has plain cornice, Tuscan columns on shingled base; good condition.
	74 - 78	c. 1890	Three attached two-story, two-bay, brick residences; flat roof and bracketed cornice; stone lintels and sills; 1/1 sash; two two-story, rounded bays and one three-sided bay; double, glazed and panelled doors with transom; altered landings.
	80 - 82	c. 1890	Three-story, four-bay brick double residence; flat roof; bracketed cornice and rope-type trim on frieze; 1/1 sash; rock-faced stone lintels and sills; three-story, rounded bays; altered doorway and transom with double, glazed and panelled doors.
	84	c. 1890	Two-story, two-bay residence; asbestos siding; flat roof; bracketed cornice and panelled frieze; 1/1 windows; two-story, three-sided bay; double, glazed and panelled doors; portico has denticulated, cornice, brackets and turned members; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South Liberty St.</u>		
86		c. 1890	Two-story, two-bay residence; tarpaper and aluminum siding; flat roof and sided cornice; two-story, three-sided bay; 1/1 windows; portico and entrance altered; good condition.
92			See 37 R Bayview Terrace
92½			See 37½ R Bayview Terrace
	<u>Lutheran Street</u>		
9		c. 1900	Two-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two-story, rounded bay; porch has bracketed cornice, turned spindles, square posts and balusters, ornate brackets; double, glazed and panelled doors with transom; good condition.
11		c. 1905	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone water table, sills and lintels; full-height, five-sided bay; porch has bracketed cornice and turned members; double, glazed, and panelled doors; good condition.
13		c. 1905	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows, stone sills and lintels; and water table; full-height, square bay; double, glazed and panelled doors; porch has bracketed cornice and brick alterations; good condition.
15		c. 1905	Two-story, two-bay, brick residence; flat roof bracketed cornice and panelled freize; full-height, five-sided bay; 1/1 windows; stone sills, lintels and water table; double, glazed and panelled doors; porch has bracketed cornice and no support structure; good condition.
17		c. 1905	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; two-story, rounded bay; 1/1 windows; stone sills, lintels and water table; double, glazed and panelled doors; porch has bracketed cornice and no support sturcture; good condition.
23		c. 1900	Two-story, two-bay, brick residence; flat roof bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels and water table; one-story, three-sided bay; double, glazed and panelled doors; porch has denticulated cornice, Tuscan columns & turned balusters; good condition.

## EAST END I HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Lutheran Street</u>		
	23 Rear (on Van Ness St.)	c. 1900	One-story, one-bay, rock-faced stone garage; flat roof with stepped parapet; glazed and panelled doors; non-contributing.
	25	c. 1905	Two-story, two-bay, brick residence; flat roof; bracketed cornice and panelled frieze; full-height, five-sided bay; 1/1 windows; stone sills, lintels and water table; two-tier porch with glazed second story, denticulated cornice, turned members, some new balusters and brackets; double, glazed and panelled door; good condition.
	27	c. 1905	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; full-height, five-sided bay; 1/1 windows; stone sills, lintels and water table; two-tier porch has denticulated cornice, turned members, brackets; double, glazed and panelled doors; good condition.
	29	c. 1905	Two-story, two-bay, brick residence, flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels and water table; full-height, five-sided bay; porch has straight spindles and posts, and turned balusters; double, glazed and panelled doors; good condition.
	31	c. 1895	Three-story, three-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; three-sided, two story, panelled and shingled bay on top two stories; 2/2 windows; stone sills, lintels; residential entry: transom, new door; storefront has cornice, display windows, transom; non-original glazed and panelled door; non-contributing garage.
	33	c. 1895	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels and water table; full-height, five-sided bay; glazed and panelled door; portico has bracketed cornice, turned members and brackets; good condition.
	35	c. 1895	Two-story, two-bay, brick residence; flat roof bracketed cornice and panelled frieze; 1/1 windows; stone sill, lintels and water table; double, glazed and panelled door, transom has small panes around perimeter; portico has bracketed cornice, turned members, brackets; full-height, five-sided bay; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Lutheran Street</u>		
37		c. 1895	Two-story, two-bay, brick residence; flat roof, bracketed cornice and denticulated frieze; 1/1 windows; stone sills, lintels and water table; double, glazed and panelled doors; porch has turned members and brackets; good condition.
39		c. 1895	Two-story, two-bay, brick residence with mansard roof; flat-roofed dormers and aluminum-sided cornice; decorative brickwork and terra cotta panels; 1/1 windows; brick lintels, stone sills and water table; five-sided, two-story bay; glazed and panelled doors; porch has denticulated cornice, turned members and brackets; good condition.
41		c. 1895	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; two-story, rounded bay; 1/1 windows; stone sills, lintels and water table; double, glazed and panelled doors with transom; new wooden landing; good condition.
43		c. 1895	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows, stone sills, lintels and water table; five-sided, two-story bay; transom and new door; good condition.
45		c. 1900	One-and-one-half-story, five-bay carriage house; asbestos siding; gabled roof; diamond shape gable and 1/1 windows; modern, glazed and panelled doors; one-story, cinder block addition to left; good condition.
10		c. 1905	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels and water table; three-sided, two-story bay; porch has denticulated cornice, turned members and brackets; double, glazed and panelled doors; good condition.
12		c. 1905	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels; one-story, three-sided bay; porch has denticulated cornice Tuscan columns on stone railing; double, glazed and panelled doors; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Lutheran Street</u>		
	14	c. 1905	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; one-story, three-sided bay; 1/1 windows; stone sills and lintels; porch has denticulated cornice and brick posts on stone balustrade; double, glazed and panelled doors; good condition.
	16	c. 1905	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels and water table; three-sided, two-story bay; double, glazed and panelled doors; porch has denticulated cornice and turned columns; good condition.
	18	c. 1905	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; sills, lintels and water table; two-tier porch has denticulated cornice, turned members and brackets; glazed and panelled doors with transom; three-sided, two-story bay; good condition.
	24	c. 1870	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels and water table; one-story, three-sided bay; porch has plain cornice and frieze; Tuscan columns and turned balusters; double, glazed and panelled door; contributing carriage house.
	30	c. 1895	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; three-story, five-sided bay; 1/1 windows; stone sills and lintels; double, glazed and panelled doors, transom; porch has bracketed cornice and turned members; good condition.
	32	c. 1895	Two-story, three-bay brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels and water table; two-story, square bay; double, glazed and panelled doors; porch has plain cornice, turned members and brackets; good condition.
	34	c. 1895	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; full-height, square bay; 1/1 windows; stone sills, lintels and water table; porch has molded cornice, turned members and brackets; double, glazed and panelled doors; good condition.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Lutheran Street</u>		
36		c. 1895	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; two-story, square bay; l/l windows; stone sills, lintels and water table; porch has turned members and plain cornice frieze; glazed and panelled door; good condition.
38		c. 1895	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; l/l windows; stone sills, lintels and water table; two-story, square bay; double, glazed and panelled doors; porch has denticulated cornice, turned columns and brackets; good condition.
40		c. 1905	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; l/l windows; stone sills and lintels, water table; double glazed and panelled doors; porch has denticulated cornice and turned members; good condition.
42		c. 1895	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; three-story, three-sided bay with quoining, belt courses and decorative brickwork; l/l windows; rock-faced stone lintels; glazed and panelled door with transom; porch has turned columns, straight balusters and plain cornice; good condition.
44		c. 1905	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; l/l windows; stone sills and lintels; one-story three-sided bay; double, glazed and panelled doors; porch has brick posts on rough stone base; plain cornice and frieze; good condition.
46		c. 1895	Two-story, two-bay, brick residence; flat roof, bracketed cornice and plain frieze; l/l windows; stone sills, lintels and water table; double, glazed and panelled doors with transom; porch has turned members and brackets; good condition.
48		c. 1895	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; two-story, three-sided bay; l/l windows; stone sills, lintels and water table; double, glazed and panelled door; porch has bracketed cornice, turned columns, straight balusters and spindles; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Lutheran Street</u>		
	50	c. 1895	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 sash; three-sided, two-story bay; glazed and panelled door, transom with stained glass; stone lintels, sills and water table; new landing; good condition.
	<u>Mill Street</u>		
	2	c. 1880	Three-story, three-bay brick commercial/residential building; ornate wooden bracketed cornice; segmentally arched brick lintels, stone sills.
	<u>North Miller Street</u>		
	131	c. 1870	Two-story, two-bay, brick residence with mansard roof; hooded dormers; French windows; 2/2 sash; segmentally arched windows with stone sills; arched transom and new door; bracketed cornice and panelled frieze; one-story lean-to addition; brick belt course and brick water table; non-contributing garage.
	133-137	c. 1900	Three one-story, two-bay brick garages flat roof; automobile service facility non-contributing.
	143	c. 1865	Two-story, three-bay residence; gabled roof; asbestos siding; bracketed cornice; 1/1 sash; glazed and panelled door; porch has turned spindles, brackets and straight posts and balusters; non-contributing garage.
	147	c. 1855	Two-and-one-half-story, three-bay residence; gabled roof; asbestos siding; 6/6 sash; three-light transom, sidelights, pilasters and new glazed, panelled door; gabled portico with straight posts; non-contributing garage.
	153	c. 1865	Two-story, three-bay, brick residence; gabled roof; aluminum sided cornice; 2/2 sash; stone lintels and sills; modern doors; good condition.
	155	c. 1865	Two-story, three-bay residence; gabled roof; bracketed cornice and plain frieze; aluminum-sided; 2/2 sash porch enclosed; new glazed and panelled door; good condition.

## EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>N. Miller Street</u>		
	157	c. 1865	Two-story, three-bay, brick residence; gabled roof; bracketed cornice and plain frieze; 2/2 windows; stone sills and lintels; new glazed and panelled door; porch has Tuscan columns, straight balusters and simple cornice; good condition.
	159	c. 1865	Two-story, three-bay residence; gabled roof; asbestos siding; 2/2 and 1/1 windows; portico has shed roof, straight spindles and posts and brackets; glazed and panelled doors good condition.
	161	c. 1865	Two-story, three-bay, brick residence; gabled roof; bracketed cornice; 1/1 windows; arched brick lintels and stone sills; glazed and panelled door; pedimented canopy, solid brackets with foliated panelling; good condition.
	163	c. 1865	Two-story, three-bay, brick residence; gabled roof, bracketed cornice; 1/1 windows; stone sills and lintels; modern glazed and panelled door; good condition.
	167	c. 1880	Three-story, three-bay, brick residence; low-pitched gable roof and bracketed cornice; 1/1 and 2/2 windows; stone sills and lintels; transomed altered door; first story cornice removed; new door; good condition.
	169	c. 1865	Two-story, three-bay residence; flat roof and bracketed cornice; stuccoed; 2/2 windows; canopy with shed roof; pendants, brackets and lattice work; double, glazed and panelled doors; good condition.
	185	c. 1865	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 and 2/2 windows; stone sills, lintels and water table; second story-balcony with French doors and no balustrade; one-story, five-sided bay; double, glazed and panelled doors with transom; good condition.
	187	c. 1865	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills and lintels, water table; double, glazed and panelled doors, transom; portico has Tuscan columns and straight balusters; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>No. Miller Street</u>		
	189	c. 1870	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled 6/6 windows; radiating voussoirs and stone sills; double, glazed and panelled doors with transom; good condition.
	191	c. 1905	Two-story, three-bay carriage house; brick and tarpaper siding; 6/1 windows; glazed and panelled garage doors; single door with simple hood; good condition.
	193	c. 1865	Two-story, three-bay, brick residence; flat roof, panelled frieze and bracketed cornice; 2/2 windows; arched brick lintels and stone sills; glazed and panelled door, transom and sidelights enclosed; panelled entry; good condition.
	195	c. 1865	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels and water table; stone sills; arched transom and new door; good condition.
	197	c. 1900	Three-story, two-bay, brick residence; flat roof, bracketed cornice and straight rope-type trim on frieze; 1/1 and 2/2 windows; stone sills, lintels and water table; five-sided, three-story bay; glazed and panelled double doors; stone landing; good condition.
	199 - 201	c. 1900	Three-story, four-bay brick double residence; flat roof and bracketed cornice; 1/1 and 2/2 sash; two five-sided, three-story bays; stone water table, lintels and sills; altered and double glazed and panelled doors; transom; altered landing.
	205	c. 1875	Two-story, three-bay, brick residence; flat roof, aluminum-sided cornice; 2/2 windows; stone sills and lintels, brick water table; double, glazed and panelled doors; transom; good condition.
	207	c. 1875	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; radiating voussoirs with keystones and stone sills; double, glazed and panelled doors with transom; wooden landing; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>No. Miller Street</u>		
	209	c. 1870	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; radiating voussoirs and stone sills, transom, new door; good condition.
	211	c. 1870	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels and stone sills; double, glazed and panelled door with transom; good condition.
	213	c. 1875	Three-story, three-bay, brick residence; flat roof, bracketed cornice; 1/1 windows; stone sills, lintels and water table; double, glazed and panelled doors; porch has denticulated cornice and turned members; good condition.
	215	c. 1875	Three-story, three-bay, brick residence; flat roof and bracketed cornice; 6/6 windows; arched brick lintels, stone sills and water table; double, glazed and panelled doors with arched transom; good condition.
	217	c. 1875	Two-story, three-bay, brick residence; flat roof with central gable peak; denticulated cornice; 2/2 windows; arched brick lintels with keystones and sills with drops; porch has decorative brackets and chamfered columns; transom and new door; good condition.
	219	c. 1875	Two-story, two-bay, brick residence; flat roof and denticulated cornice; full-height, three-sided, wood-panelled bay; porch has molded cornice, ornate brackets and balusters and chamfered columns; glazed and panelled door; 2/2 and 1/1 windows; good condition.
	221	c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; arched, brick lintels and stone sills; gabled portico with returns, Tuscan columns; arched transom and new door; good condition.
	223	c. 1885	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; full-height, three-sided bay with decorative brickwork; 1/1 windows; stone lintels, sills and water table; double, glazed and panelled doors with transom; two-tier porch with brick base and piers, square posts and balusters; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>No. Miller Street</u>		
	223 Rear	c. 1915	One-story, two-bay, brick garage; flat roof; panelled garage doors; good condition.
	126	c. 1880	Two-story, four-bay, brick residence; flat roof and bracketed cornice; missing or obscured windows and doors; one-story, three-sided frame bay with panelling; brick water table; fair condition.
	128 - 30	c. 1885	Two attached two-story, four-bay brick residences; flat roof and bracketed cornice; two rounded and panelled bays on second story; missing or obscured windows and doors; straight brick lintels, stone sills and water table.
	132	c. 1865	Three-story, three-bay, brick residence; gabled roof and plain cornice; 6/6 windows; arched brick lintels and stone sills; first story windows and door recessed with decorative lintels; porch has plain cornice and frieze, Tuscan columns on brick piers and straight balusters; double, glazed and panelled doors; non-contributing garage.
	138	c. 1865	Two-story, three-bay residence; gabled roof; asbestos siding; 6/6 and 1/1 windows; porch has straight posts and fluted balusters; wood railing, flat roof, plain frieze and cornice; glazed and panelled door; good condition.
	140	c. 1865	Two-story, three-bay, clapboarded residence; flat roof, bracketed cornice and panelled frieze; 1/1 and 2/2 windows; door surround has denticulated cornice, fluted pilasters and glazed and panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>No. Miller Street</u>		
	142	c. 1855	One-story, three-bay, brick residence with raised basement; gabled roof; bracketed canopy and twisted rope-type trim on frieze; 2/2 windows; stone sills and lintels; glazed and panelled doors; portico has straight spindles and balusters, brackets, turned columns and balusters; good condition.
	152	c. 1880	Two-story, three-bay, brick residence flat roof, bracketed cornice and panelled frieze; 2/2 windows; radiating voussoirs and stone sills; glazed and panelled door; porch with molded cornice, straight spindles, brackets; chamfered columns and balusters; good condition.
	156	c. 1880	Two-story, three-bay, brick residence flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills and lintels; porch has turned members and brackets; glazed and panelled door; good condition.
	160	c. 1875	Two-story, three-bay, brick residence flat roof, bracketed cornice and panelled frieze; missing or obscured windows; stone sills and lintels, water table; glazed and panelled door; good condition.
	162	c. 1880	Two-story, three-bay, brick residence flat roof, bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels, stone sills and water table; porch has chamfered columns, straight balusters, molded cornice and plain frieze; transom, sidelights and new door; cement landing; good condition.
	164 - 166	c. 1880	Two-story, six-bay double house; brick and aluminum siding; flat roof, bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels, stone sills and brick water table; glazed and panelled doors; porticos have straight posts and railing, one has flat roof, the other a shed roof; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>No. Miller Street</u>		
	184	c. 1885	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two-story, five-sided frame, panelled bay; transom and altered door; good condition.
	186	c. 1880	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 and 2/2 windows; arched brick lintels and stone sills; arched transom and new double doors; good condition.
	188	c. 1880	Three-story, three-bay, brick residence with permastone; flat roof, bracketed cornice and panelled frieze; 2/1 and 2/2 windows; arched transom and new door; good condition.
	190	c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels and stone sills; brick water table; wooden landing with straight balusters, arched transom; good condition.
	204 Rear	c. 1900	Two-story, five-bay, brick carriage house; loading door on second story; double barn doors; good condition.
	204	c. 1875	Three-story, three-bay, brick residence; flat roof, bracketed cornice; 2/2 windows; arched brick lintels and stone sills; enclosed transom and glazed and panelled door; good condition.
	206	c. 1875	Three-story, three-bay, brick residence; flat roof, bracketed cornice; 1/1 windows; arched brick lintels and stone sills; one sidelight; arched transom and glazed and panelled door; good condition.
	208	c. 1875	Two-story, three-bay, brick residence; flat roof and aluminum-sided cornice; 6/6 windows; arched brick lintels and stone sills; arched transom; double, glazed and panelled doors; good condition.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>No. Miller St.</u>		
210		c. 1875	Two-story, three-bay, brick residence; flat roof and aluminum-sided cornice; 2/2 windows; radiating voussoirs and stone sills; glazed and panelled door; good condition.
212		c. 1875	Two-story, three-bay, brick residence; flat roof and aluminum-sided cornice; single and paired 1/1 windows; radiating voussoirs and stone sills; transom and new glazed and panelled door; good condition.
	<u>So. Miller St.</u>		
9		c. 1885	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 and 2/2 windows; stone sills and lintels and water table; five-sided, three-story bay; double, glazed and panelled doors with transom gabled hood; good condition.
11		c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills, lintels and water table; transom with double, glazed and panelled doors; new landing; good condition.
13		c. 1880	Two-story, three-bay, brick residence; flat roof and aluminum-sided cornice; 2/2 windows; stone sills, lintels and water table; transom and glazed and panelled doors; good condition.
15		c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills, lintels and water table; double, glazed and panelled doors with transom; good condition.
17		c. 1870	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; radiating voussoirs; stone sills with brackets and water table; altered entry; new projecting vestibule in basement; good condition.
19 - 21		c. 1875	Three-story, four-bay, brick double house; flat roof, bracketed cornice and panelled frieze; 1/1 and 2/2 windows; stone water table, sills and lintels with twisted rope-type trim;

EAST      END      HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>So. Miller St.</u>		
	19 - 21 (cont'd.)		Two full-height, five-sided bays; double, glazed and panelled doors with transom; wooden landings one with turned and straight balusters; good condition.
	23	c. 1875	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone water table, sills and lintels with twisted rope-type trim; first story, five-sided bay; double, glazed and panelled doors with transom; wood landing; good condition.
	25	c. 1875	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills, lintels and water table; double, glazed and panelled doors with transom; portico with decorative pediment, turned members and columns and balusters; wooden landing; good condition.
	27	c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills, lintels and water table; one-story, three-sided bay with decorative brick panelling; double, glazed and panelled doors with transom; good condition.
	29	c. 1880	Two-story, three-bay brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills and lintels; one-story, three-sided bay with mansard roof; brackets with pendants and panelling; straight wood railing; transom and panelled door; good condition.
	31-33	c. 1870	Three-story, six-bay, brick double residence; flat roof, bracketed cornice and panelled frieze; 2/2 sash; stone sills, water table and lintels with rope-type trim; 33 -- transom and/or sidelights; double, glazed and panelled doors.
	35	c. 1885	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 and 1/1 windows; smooth stone sills, lintels and water table; square bay on second story;

EAST      END      HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>So. Miller St.</u> 35 (cont'd.)		five-sided bay on first and basement levels; transom and double, glazed and panelled doors; good condition.
37		c. 1885	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 and 1/1 windows; square bay on second story and five-sided bay on first and basement; stone lintels, sills and water table; glazed and panelled doors with transom; good condition.
39		c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills lintels and water table; double, glazed and panelled doors with transom; wood landing with straight balusters and posts; good condition.
41		c. 1880	Two-story, three-bay, brick residence; flat roof, aluminum-sided cornice; 2/2 windows; stone sills, lintels and water table; transom and double, glazed and panelled doors; wooden landing with straight balusters; good condition.
43		c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone water table, sills and lintels; double glazed and panelled door with transom; porch has Tuscan columns and turned balusters; basement has garage door; good condition.
45		c. 1880	Three-story, three-bay, brick residence; flat roof, bracketed cornice and rope-type trim on frieze; two-story, three-sided bay, shingled and panelled; 1/1 and 2/2 windows; arched brick lintels, smooth stone sills and water table; sidelights, arched transom and newer glazed and panelled door; good condition.
47		c. 1870	Two-and-one-half-story, three-bay residence; gabled roof; aluminum-sided and brick; 6/6 windows; enclosed transom and modern glazed and panelled door; two-tier enclosed porch on north elevation; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>So. Miller St.</u>		
	49 - 51	c. 1905	Two-story, four-bay, brick double house; flat roof, bracketed cornice and rope-type trim on frieze; single and paired 1/1 and 2/2 windows; stone sills and lintels; porch with Tuscan columns and turned balusters remain; double, glazed and panelled doors; good condition.
	57	c. 1870	Three-and one half-story, five-bay residence; flat roof; bracketed cornice and panelled frieze; eyebrow, 4/4 and 6/6 windows; arched brick lintels and stone sills and water table; double, glazed and panelled door with arched transom; porch has bracketed cornice, chamfered columns, turned balusters, brackets and pendants; good condition.
	8 - 10	c. 1870	Three-story, six-bay, brick double residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels, stone sills and water table; altered doors, large transoms.
	12	c. 1880	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; five-sided, two-story bay; 1/1 windows, stone sills and lintels, water table; double, glazed and panelled doors; cobblestone landing; good condition.
	14	c. 1880	Two-story, two-bay, brick residence; flat roof, bracketed cornice and simple frieze; square bay with shingled gable and with fanlight; paired and single 1/1 windows; stone sills, lintels and water table; some windows and door obscured; portico has flared posts on rock-faced cinder block base; good condition.
	16	c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills and lintels; porch has new roof, slender posts and lattice-like balustrade; altered door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>So. Miller St.</u>		
18		c. 1880	Two-story, three-bay, brick residence flat roof, bracketed cornice and panelled frieze; 2/2 windows; radiating voussoirs and stone sills; one-story, five-sided bay; double, glazed and panelled doors with arched transom; good condition.
20		c. 1880	Two-story, three-bay, brick residence flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone lintels, sills and water table; double, glazed and panelled doors with transom; portico has denticulated cornice and Tuscan columns; good condition.
22		c. 1880	Two-story, three-bay, brick residence flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills, lintels and water table; double, glazed and panelled doors; transom; brick landing; good condition.
24		c. 1880	Two-story, three-bay, brick residence flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills, lintels and water table; brick landing; transom and double, glazed and panelled doors; good condition.
26		c. 1880	Two-story, four-bay, brick residence; flat roof, bracketed cornice and panelled frieze; stained glass and 1/1 windows; stone sills, lintels and water table; porch has simple cornice, Tuscan columns and straight balusters; full-height, five-sided bay with brick panels; glazed and panelled door with transom; porch has turned posts; good condition.
28		c. 1880	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; full-height, five-sided, shingled and panelled bay; 2/2 windows; stone sills, lintels and water table; transom and double glazed and panelled doors; stone landing; good condition.
30		c. 1880	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; two-story, rounded bay; 1/1 windows, stone sills, lintel

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>So. Miller St.</u>		
	30 (cont'd.)		water table and basement; brick landing; glazed and panelled door; good condition.
32		c. 1880	Two-story, three-bay, brick residence flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills, lintels and water table; double, glazed and panelled door with transom; brick landing; good condition.
34		c. 1880	Two-story, three-bay, brick residence flat roof and bracketed cornice; 2/2 windows; stone sills, lintels and water table; one-story, three-sided frame bay; double, glazed and panelled doors with transom; wood landing with straight balusters; good - fair condition.
36		c. 1880	Two-story, three-bay, brick residence flat roof, bracketed cornice and panelled frieze; 2/2 windows, stone sills, lintels and water table; double glazed and panelled doors with transom; brick and cinder block landing; good condition.
38		c.1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills, lintels and water table; double, louvred doors with transom; good condition.
40		c. 1880	Two-story, three-bay, brick residence flat roof, bracketed cornice and panelled frieze; 2/2 windows, stone sills, lintels and water table; transom and new door; hood with shed roof and lattice work brackets; wooden landing; good condition.
44 - 52		c. 1870	Five attached three-story, three-bay brick row houses; flat roof, bracketed cornice and panelled frieze; 2/2 sash; arched brick lintels and water table; 44 -- entries: arched transoms, sidelights, altered doors and cast-iron trim.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Montgomery Street</u>		
	61 -	c. 1889	One-story, ten-bay, brick industrial structure; flat roof, bracketed cornice and denticulated frieze; sealed 2/2 windows with brick labels; major door sealed with brick with new wood door cut in; wooden doors with large transoms;
	99	c. 1840	Two-story, seven-bay stuccoed brick residence; gabled roof with massive bracketed pediments; cupola; bracketed cornice; recessed central section has classical porch with balustrade atop and Doric columns; glazed and panelled door; 1/1 sash, some with heavy lintels; contributing garage.
	107	c. 1890	Two-story, three-bay, brick residence with slate mansard roof; gabled dormers and bracketed cornice; third story cast iron balcony; two-sided, one-story bay; flat, segmental arches and obscured recessed windows; stone belt course, water table and sills; modern, double door; stone landing with cast iron stair rail; good condition.
	109	c. 1890	Three-story, two-bay, brick residence flat roof, bracketed cornice and panelled frieze; rounded, three-story bay; 1/1 windows, stone sills, lintels and water table; double, glazed and panelled doors; canopy removed; brick landing with old cast iron stair rail; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Montgomery Street</u>		
	117.	c. 1855	Three-story, three-bay, brick residence; low-pitched gable roof and bracketed cornice; 2/2 windows; arched brick lintels and stone sills; arched transom and double, glazed and panelled doors; gabled portico with turned columns and straight balusters; contributing garage.
	119	c. 1855	Three-story, three-bay, brick residence; flat roof, bracketed cornice; 1/1 windows; stone sills and lintels; portico with shed roof, spindles and brackets; glazed and panelled doors; wood landing; good condition.
	121	c. 1855	Three-story, three-bay, brick residence; low-pitched gable roof and plain cornice; 1/1 windows; stone sills and lintels; portico enclosed with brick; double, glazed and panelled doors; good condition.
	123	c. 1855	Three-story, three-bay, brick residence; low-pitched gable roof and plain cornice; 1/1 windows; stone sills and lintels; transom, sidelight and glazed and panelled door; good condition.
	125	c. 1855	Three-story, three-bay, brick residence; low-pitched gable roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills and lintels; two-tier portico with shingles, paneling, plain cornice, latticework and turned columns; double, glazed and panelled door; good condition.
	127	c. 1875	Two-story, two-bay, brick residence with stone basement; flat roof, bracketed cornice and panelled frieze; full-height, rounded bay; 1/1 windows; stone sills, lintels and water table; glazed and panelled door; cast iron railing; good condition.
	129 - 131	c. 1800	Three-and-one-half-story, six-bay double house; gambrel roof with shed and gabled dormers; tarpaper siding; 1/1, 2/2 and 6/6 windows; porch has brackets, chamfered columns; transom and glazed and panelled door; good condition.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Montgomery Street</u>		
	133 - 57	1961	Three-story, multi-bay modern brick school; flat roof; horizontal bands of windows; entry has vertical band of cloudy glass and/or metal; non-contributing
	177	c. 1905	Two-and-one-half-story, three-bay residence; stuccoed; gabled roof of red tile; shed dormer; single, double 10/1 and 3/1 windows; glazed and panelled door; porch has tile roof and columns on stuccoed railing; good condition; non-contrib. garage.
	189	1829	Two-and-one-half-story, five-bay, clapboarded historic house museum; gabled roof; classical giant portico with Palladian window and pediment; Ionic columns with 6/6 windows with bold overwindows; second story balcony has turned balusters; massive entry has elaborately panelled sidelights; transom and panelled door; good condition.
	195	1839	One-and-one-half-story, four-bay residence with raised basement; clapboarded; gabled roof; gabled dormer with sunflower panel in pediment; glazed and panelled door, sidelights and transom; porch has square posts with brackets, turned balusters, gabled canopy with sunflower ornamentation; 6/6 and casement windows; one-story, panelled, shallow bay; good condition.
	201	1839	Two-story, five-bay stuccoed brick residence; hipped roof and bracketed cornice; 2/2 and 6/6 sash; transom and sidelights and panelled door; porch has latticework.
	205	1845	Two-and-one-half-story, three-bay residence; cross-gabled roof with exposed rafters; asbestos siding; windows have small panes of stained glass around perimeters of upper sash and pointed-arch window; decorative hood over second story window; porch has plain cornice, simple frieze; flared posts and panelled piers and flared balusters; modern, glazed and panelled door, transom and sidelights; good condition. two contributing outbuildings.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Montgomery Street</u>		
	209	c. 1915	Two-and-one-half-story, three-bay residence; stuccoed, gabled roof with shed dormer; 1/1 windows; glazed porch with stucco base; contributing garage.
	215	c. 1915	Two-and-one-half-story, three-bay residence; aluminum sided; shingled; gabled roof with paired 1/1 windows; porch has shed roof, pediment, straight balusters and Tuscan columns; sidelights and glazed and panelled door; good condition.
	225	c. 1855; c.1870	Two-story, three-bay, brick residence; with mansard roof; gabled dormers; bracketed cornice and panelled frieze; French and 2/2 windows; arched lintels with drip courses and stone sills and stone water table; double glazed and panelled doors with transom; cast iron decoration; stone landing; good condition.
	227	1839	Two-and-one-half-story, five-bay residence; stuccoed; low-pitched gable roof and raised basement with water table; 3/3 eyebrow and 6/6 windows; stone sills and lintels; louvred door with transom and sidelights; porch has square posts; new railing, turned balusters; good condition.
	235	1848	Two-and-one-half-story, four-bay brick residence; "L" shaped; multi-gabled roof with gabled dormers; bargeboard on cornice and gable ends; pendants; 6/6 windows; stone sills and lintels; porch has straight posts and brackets; five-sided, two-story bay; double, glazed and panelled door; good condition.
	253 - 55	c. 1880	Three-story, four-bay, brick double house; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels and water table; two, three-sided, three-story bays with recessed brick panelling; porch has turned members, brackets and straight wood railing; glazed and panelled doors; transom; good condition; non-contributing garage.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Montgomery Street</u>		
	158	c. 1885	Two-story, four-bay, brick residence; gabled roof; denticulated cornice and panelled frieze; multi-paned/l windows; projecting gabled bays; with tripartite windows, fluted pilasters, garland-design trim and panelling and shingling; portico, fanlight, glazed and panelled door; good condition.
	162	c. 1885	Two-and-one-half-story, two-bay, brick residence with cross gables; molded cornice, single and triple windows; decorative brick panels; arched brick lintels with keystones; recessed entry pilasters; glazed and panelled door and stone landing; good condition.
	166	c. 1880	Two-story, two-bay, brick residence with mansard roof; hooded dormers; bracketed cornice and panelled frieze; full-height, five-sided bay; 1/1 windows; stone sills, lintels and belt course, water table; double, glazed and panelled doors; vestibule with mansard roof and bracketed cornice; one-story garage addition; good condition.
	170	c.1880	Two-story, two-bay, brick residence with mansard roof; hooded dormers, bracketed cornice; 2-story, 5-sided bay; 1/1 and 2/2 windows; stone sills and lintels, water table; double, panelled door with transom; porch with bracketed cornice and Tuscan columns; good condition.
	174	c. 1880	Two-story, two-bay, brick residence with slate mansard roof; flat-roofed dormers, bracketed cornice and panelled frieze; 1/1 and 2/2 windows; stone sills and lintels, water table; five-sided, two-story bay; double, glazed and panelled doors; stone sloop; good condition.
	176	c. 1865	Three-story, three-bay, brick residence; low-pitched gable roof with peak in front; bracketed cornice and panelled frieze; paired 1/1 windows; stone sills and lintels with twisted rope-type trim; porch removed; French doors; glazed and panelled door with transom; sidelights; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Montgomery Street</u>		
	180 - 82	c. 1890	Two-story, four-bay brick double residence with gable roof; gabled and polygonal dormers; glazed and panelled doors with transoms; rounded, panelled bay on second story; 1/1 sash; decorative terra cotta panels.
	192 Rear	c. 1880	One-and-one-half-story, three-bay carriage house; gabled and gambrel roof; triangular dormer, obscured windows and doors; good condition.
	192	c. 1880	Two-story, three-bay, brick residence with mansard roof; bracketed cornice and panelled frieze; gabled dormers; central projecting section with double glazed and panelled doors; old cast iron balcony; mansard roof portico with bracketed cornice, panelled frieze and Tuscan columns on panelled piers; 1/1 and 2/2 windows; arched lintels with-keystones; good condition.
	196	1857	Two-and-one-half-story, three-bay brick residence; gabled roof with gabled dormers, bargeboard and crest rail; decorative chimneys; projecting central section has ornate balcony; 6/6 windows; arched, double, glazed and panelled doors; good condition.
	202 - 04	c. 1890	Two-story, five-bay brick double residence; gable roof with shingled cross gables; bracketed cornice; 1/1 sash; rock-faced stone sills; lintels and water table; basement; shallow one-story, three-sided frame bays; recessed entry: fluted columns, panelled doors; good condition.
	206	c. 1890	Two-story, two-bay, brick residence; mansard roof with cross gables and flat-roofed dormers; 4/4 and 6/6 windows; three-sided, two-story bay; portico has mansard roof and Tuscan columns on brick railing; double, glazed and panelled doors; good condition.
	208	c. 1855	Two-and-one-half-story, two-bay, brick residence; hipped roof with cross gables and bargeboard; 2/2 windows; stone sills and lintels; five-sided, two-story bay with bracketed cornice; gabled portico with straight posts and decorative balusters and brackets;

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Montgomery Street</u>		
	208 (continued)		glazed and panelled door; good condition.
216		c. 1855	Two-and-one-half-story, three-bay, brick residence; hipped roof, cross gables with bargeboard; central projection; recessed 6/6 sash; arched and straight stone lintels; double, glazed and panelled doors with arched transom; gabled hood with brackets and bargeboard; cast-iron stair rail;
222		c. 1860	Two-story, four-bay, brick residence; mansard roof; hooded dormers and bracketed cornice; 2/2 sash; windows with ogee arches; Tudor-arched transom and double; glazed and panelled doors; brick three-sided bay on its north elevation; good condition.
226		c. 1860	Two-story, four-bay, brick residence; mansard roof; hooded dormers and bracketed cornice; 2/2 sash; windows with Tudor arches; stone lintels and sills; water table; glazed and panelled door; arched transom; one-story bay on south
230		c. 1860	Two-story, five-bay brick residence; mansard roof; gabled dormers, bracketed cornice and chimneys; 1/1 sash; arched lintels with drip courses and sills; central projection with altered doors and transom; enclosed square and panelled one-story bay, balustrade atop; good condition.
236		c. 1870	Two-story, two-bay frame residence; wooden shingle sided; slate mansard roof; pedimented dormers, bracketed cornice and simple rope-type trim on frieze; 1/1 windows with heavy lintels shed-type hoods; panelled and/or glazed doors with transoms
238		c. 1870	Two-story, three-bay frame residence; asbestos sided; slate mansard roof; pedimented dormers; bracketed cornice and simple rope-type trim on frieze; 1/1 sash; heavy lintels; shed-type hoods; panelled and/or glazed doors with transoms; good condition.

EAST END I HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Montgomery Street</u>		
	252	c. 1870	Two-story, three-bay frame residence; low-pitched gable roof with peaked center; tarpaper sided; bracketed cornice; 2/2 sash; modern, glazed and panelled door; transom, sidelights; canopy with denticulated cornice and brackets; non-contributing garage.
	254	c. 1870	Two-story, three-bay brick residence; aluminum siding; mansard roof; gabled dormers and bracketed cornice; 1/1 sash; segmentally arched windows with stone sills; stone water table; glazed and panelled door; shed-roof canopy with latticework brackets; good condition.
	256	c. 1870	Two-story, two-bay, brick residence; mansard roof; gabled dormer, bracketed cornice and panelled frieze; full-height, five-sided bay; 1/1 sash; stone lintels and sills; enclosed sidelights and transom; new wood door; mansard canopy with crest rail; spindles and brackets; good condition.
	258	c. 1870	Two-story, three-bay brick residence; flat roof and bracketed cornice; 2/2 sash; segmentally arched windows with stone sills; double, glazed and panelled doors with gabled canopy with bargeboard and heavy brackets; good condition.
	<u>Monument Street</u>		
	8-12	c. 1925	One-story, three-bay garage; flat roof rock-faced cinder block; two older glazed and panelled doors; one modern, glazed and panelled door; non-contributing.
	26-28	c. 1895	Three-story, four-bay brick double house; flat roof, bracketed cornice and decorative frieze; 1/1 sash; rock-face stone lintels and sills; two, three-story, three-sided bays; porch has plain cornice and frieze; bases of both porches removed; turned columns on brick piers or round columns on stone piers; transoms and altered doors.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Monument Street</u>		
	30-32	c. 1895	Three-story, four-bay brick double house; flat roof; bracketed cornice and decorative frieze; two, three-story three-sided bays; 1/1 sash; rock-faced stone sills and lintels; aluminum-sided cornice on porch; brick bases with new columns; transom; sidelights and altered door; good condition.
40		c. 1950	One-story, one-bay cinder block garage gabled roof; glazed and panelled garage door; non-contributing.
56			See 105 R Courtney.
58		c. 1895	Two-story, three-bay brick residence; facade is stuccoed; flat roof with false front; 2/2 sash; segmentally arched windows with rock-faced stone sills; transoms, sidelights and altered door; attached garage; good condition.
72		c. 1905	One-story, two-bay garage; clapboarded; hipped roof; modern, glazed and panelled garage doors; good condition; non-contributing.
74		c. 1905	One-story, two-bay garage; gabled roof; stuccoed brick; glazed and panelled garage doors; good condition; non-contributing.
	<u>Little Monument Street</u>		
11		c. 1895	One-story, two-bay garage; cinder block and brick; flat roof with metal edge; glazed and panelled garage doors; non-contributing.
13		c. 1905	One-story, two-bay cinder block garage; flat roof with stepped parapet; panelled, metal garage doors; good condition; non-contributing.
29		c. 1950	One-story, two-bay, brick garage; cinder block and brick; flat roof; glazed and panelled garage doors; non-contributing.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Little Monument Street</u>		
19			See 143 R So. William
27		c. 1890	Two-story, three-bay brick residence; flat roof and bracketed cornice; asbestos-sided second story bay; porch with turned members, pendants, brackets and straight balusters; stone sills and lintels; 1/1 sash; glazed and panelled door; good condition.
28		c. 1890	Two-story, three-bay brick residence with entry on side elevation; flat roof; wooden bracketed cornice; stone lintels and sills; 1/1 sash; original entry on porch.
30			See 144 R Renwick.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Nicoll Street</u>		
	83 - 85	c. 1855	Pair of two-and-one-half-story, three-bay frame residences; asbestos siding; gabled roof and molded cornice; eyebrow windows; 1/1, and 6/6 sash; glazed and panelled doors; porches with flat or shed roofs and straight or turned posts; non-contributing garage.
	62		See 2 - 4R LeRoy Place.
	86		See 404 R Grand Street.
	90		See 488 R Liberty Street.
	<u>Overlook Place</u>		
	9		See 2 R Bayview Terrace.
	11 - 13	c. 1890	Two-story, four-bay brick double residence; mansard roof, bracketed cornice and hipped dormer; 1/1 sash; windows with stone lintels and sills; transom, glazed and panelled doors; porch has turned members; cross gables have panelling. good condition.
	15 - 15½	c. 1890	Two-story, four-bay brick double residence; flat roof; bracketed cornice and panelled frieze; 1/1 sash; rock-faced stone lintels and sills; two-story, rounded bay; porch has plain cornice and flared square posts atop cobblestone railing; transoms and glazed and panelled doors.
	17	c. 1905	Two-and-one-half-story, three-bay residence; asbestos siding; gabled roof; 3/1 windows; glazed and panelled doors; sidelights; porch has plain cornice, Tuscan columns atop brick piers and straight balusters; good condition.
	19	c. 1905	Two-story, two-bay, brick residence; flat roof and bracketed cornice; panelled frieze; 1/1 windows; stone sills and lintels; double, glazed and panelled doors; porch has plain cornice, Tuscan columns and turned balusters; two-story, three-sided bay; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Overlook Place</u>		
	21 - 29	c. 1890	Five attached two-story, two-bay brick, row houses; flat roof, bracketed cornice, panelled frieze and decorative brick work; square or three-sided, two-story bays; 1/1 sash; stone lintels and sills; porticos have denticulated cornice, Tuscan columns and turned balusters; #29 has altered entry.
47		c. 1890	Two and one half-story, two-bay residence; aluminum siding; tower with pyramidal, multi-gabled roof; two-story, three-sided bay; glazed and panelled door; porch has turned columns and brackets; good condition.
49		c. 1890	Two-story, three-bay brick residence; flat roof, bracketed cornice and decorative frieze; ornate brickwork; 1/1 windows; stone lintels with incised decoration; square, two-story bay; porch has cobblestone columns and railing; glazed and panelled door; good condition.
51		c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; rock-faced stone sills and lintels; glazed and panelled door; porch has turned members, decorative arches and straight balusters; good condition.
55		c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; two-story, three-sided bay; 1/1 windows; rock-faced stone sills and lintels; glazed and panelled door; porch has turned members; good condition.
57		c. 1890	Two-story, two-bay brick residence; flat roof, bracketed cornice and panelled frieze; two-story, three-sided bay with decorative brick paneling; 1/1 windows; rock-faced stone lintels and sills; two-tier porch has turned members; some alterations; glazed and panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Overlook Place</u>		
59		c. 1890	Two-and-one-half-story, two-bay residence, asbestos siding; gable roof and bracketed cornice; two-story, three-sided bay; 1/1 windows; glazed and panelled door; porch has panelling, turned columns and straight balusters; good condition.
61		c. 1890	Two-and-one-half-story, two-bay residence; aluminum siding; gabled roof; two-story, three-sided bay; two-tier porch has lattice work arch; turned columns and spindles; glazed and panelled doors; good condition.
73	(on So.Lander St)	c. 1950	One-story, eight-bay garage; flat roof; cinder block, glazed and panelled garage doors;
75		c. 1890	Two-story, two bay-brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two-story, three-sided bay, transom, sidelights and altered doors; good condition.
77		c. 1890	Two-story, three-bay residence; tar-paper shingles; flat roof, bracketed cornice and decorative frieze; 2/2 windows; enclosed porch, good condition.
79		c. 1890	Two-story, two-bay residence; asbestos siding; flat roof, bracketed cornice and patterned frieze; 1/1 and 2/2 windows; two-story, three-sided bay; enclosed porch; good condition.
85 - 87		c. 1890	Three-story, four-bay brick double residence; flat roof; aluminum sided or bracketed cornice; one panelled frieze; 1/1 sash; rock-faced stone sills and lintels; porch has flared posts on brick railing; transoms and panelled doors; two three-story rounded bays.
89		c. 1890	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; three-story, rounded bay; 1/1 windows; rock-faced stone sills and lintels; altered porch: flared posts on brick balustrade; glazed and panelled door with transom; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Overlook Place</u>		
	91 - 93	c. 1890	Two-story, four-bay double residence; asbestos siding; flat roof and aluminum-sided cornice; 1/1 windows; porch flared posts on solid railing; altered doors with transoms; two, three-sided, two-story bays; good condition.
	95	c. 1890	Two-story, two-bay, brick residence; flat roof and aluminum-sided cornice; 1/1 windows; stone sills and lintels; transom, new glazed and panelled door and sidelights; porch has sided cornice and turned columns; two-story, three-sided bay; good condition.
	97 - 99	c. 1890	Three-story, four-bay double residence; brick and modern siding; flat roof; bracketed cornice and patterned frieze; 1/1 windows; rock-faced stone sills and lintels; glazed and panelled doors with transoms; one portico turned members, the other is altered; portico removed; two, three-story, rounded bays; good condition.
	101 - 103	c. 1890	Three-story, four-bay, brick double residence; 1/1 windows; rock-faced stone sills and lintels; glazed and panelled doors; flat roof, aluminum-sided or bracketed cornice and panelled frieze; good condition.
	105	c. 1890	Two-story, two-bay residence; asbestos siding; multi-gabled roof; glazed and panelled door; modern portico and picture window; good condition.
	8	c. 1890	Two-and-one-half-story, two-bay residence; clapboarded and stuccoed; cross-gabled roof; gable ends with shingling and largeboard; 1/1 windows two-story bay with crest rail; porch has pediment with sunburst panel, turned columns; fair condition.
	10 - 12	c. 1890	One-story, four-bay double residence; asbestos siding; 1/1 windows; double, glazed and panelled doors; porch has pediment with sunburst-panel, denticulated frieze; turned balusters; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Overlook Place</u>		
	14	c. 1890	Two-and-one-half-story, two-bay residence; aluminum siding; gable roof; square and round towers with pyramidal and conical roofs; 1/1 windows; three-sided, second-story bay; altered porch; glazed and panelled door; good condition.
	14 Rear (on Riverview Pl	c. 1950	One-story, one-bay garage; gabled roof cinder block; non-contributing.
	22	c. 1890	Two-story, three-bay, brick residence; flat roof and aluminum-sided cornice; 1/1 windows; rock-faced stone sills and lintels; right two-bay section projects; 1/1 windows; large window with stained glass; entry recessed beneath bold, rock-faced stone arch atop fluted columns on brick piers; glazed and panelled door; good condition.
	24	c. 1890	Two-story, three-bay residence; aluminum sided; multi-gabled roof; tower with pyramidal roof; glazed and panelled door; 1/1 windows; porch has shed roof, turned columns and solid railing, good condition.
	26	c. 1915	Two and one-half-story, two-bay residence; aluminum siding; gambrell roof porch has flared square posts on brick piers; paired, 1/1 windows; glazed and panelled door; good condition.
	30	c. 1890	Two and one half-story, three-bay residence; aluminum siding; multi-gabled roof; porch has Tuscan columns and straight or turned balusters; arched and 1/1 windows; glazed and panelled door, second-story bay with tent roof; good condition.
	44	c. 1890	Two-story, two-bay carriage house/garage; asbestos siding; flat roof and bracketed cornice; 2/2 windows; loading door on second story; two modern garage doors; good condition.
	46	c. 1890	Two-and-one-half-story, two-bay residence; asbestos and tarpaper siding; cross-gabled roof; two-story, bay; glazed and panelled door; altered main porch; side porch with barge-board and turned columns; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Overlook Place</u>		
48		c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; transom and new doors; altered porch retains bracketed cornice; good condition.
50		c. 1890	Three-story, two-bay residence; tar-paper siding; flat roof, bracketed cornice and panelled frieze; 1/1 windows; three-story, three-sided bay; double, glazed and panelled doors with transom; porch has plain cornice panelled frieze, turned spindles and columns; straight balusters; good condition.
52		c. 1890	Two-story, three-bay, brick residence flat roof and bracketed cornice; 1/1 windows; brick lintels and stone sill; two-story, three-sided bay; porch has plain cornice, Tuscan columns, turned balusters; glazed and panelled door; shallow second story bay topped with shingled pediment; good condition.
54		c. 1890	Two-story, three-bay residence; perma-stone facade and brick; flat roof and bracketed cornice; 1/1 windows; glazed and panelled door; new porch; two-story, three-sided bay and shallow second-story bay topped by shingled pediment; good condition;
56		c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; glazed and panelled door; porch has plain cornice, flared square posts on brick piers; two-story, three-sided bay; good condition.
58		c. 1890	Two-story, two-bay, brick residence; flat roof and bracketed cornice; 1/1 windows; rock-faced stone sills and columns, porch has turned spindles and columns, straight balusters; two-story, three-sided bay; glazed and panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Overlook Place</u>		
	60	c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; rock-faced stone sills and lintels; glazed and panelled door; two-story, three-sided bay; porch has plain cornice, flared square posts on piers; good condition.
	62	c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and decorative brickwork; 1/1 windows; rock-faced stone sills and lintels; two-story, square bay; glazed and panelled door; porch has mansard roof plain cornice, round columns on new brick piers, straight balusters; good condition.
	64	c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice; 1/1 windows; rock-faced stone sills and lintels; two-story, three-sided bay; porch has mansard roof, plain cornice Tuscan columns; glazed and panelled door; good condition.
	66	c. 1890	Two-story, two-bay, brick residence; flat roof and bracketed cornice; 1/1 windows; rock-faced stone sills and lintels; two-story, three-sided bay; porch removed; panelled door, good condition.
	66A		See 97 R South Lander Street.
	70 - 72	c. 1890	Three-story, four-bay brick double residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two, three-story, three-sided bays; porch has square posts atop brick piers; transoms, sidelights and new doors; good condition.
	84 - 86	c. 1890	Three-story, four-bay brick double residence; flat roof, aluminum-sided cornice (retains brackets), and panelled frieze; 1/1 windows; two three-sided, three-story bays; porch has square posts on brick piers; fanlights, sidelights and new doors; good condition.
	88 - 90	c. 1890	Three-story, four-bay brick double residence; flat roof; aluminum-sided cornice; retains brackets and panelled frieze;

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Overlook Place</u> 88-90 (cont'd.)		1/1 windows; two three-sided, three-story bays; porch has square posts atop brick piers; transom and panelled door; good condition.
92		c. 1890	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; three-sided, three-story bay; porch has square posts atop brick piers; glazed and panelled door with transom; good condition.
94 - 96		c. 1890	Three-story, four-bay brick double residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; two three-sided, three-story bays; porch has square posts atop brick piers; glazed and panelled doors and fanlights; good condition.
98 - 100		c. 1890	Three-story, four-bay brick double residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows, two three-sided, three-story bays; porch has turned members and cutwork brackets; transoms and panelled doors; good condition.
114			See 31 Rear Monument Street.
	<u>Parmenter Street</u>		
9		c. 1850	Two-story, three-bay, brick residence; flat roof and molded cornice; windows and door obscured or missing; radiating voussoirs; passageway through building; fair condition.
11		c. 1835	Two-and-one-half-story, three-bay, brick residence, gabled roof and molded cornice; windows and door obscured or missing, stone lintels and sills and water table; brick and rock-faced cinder block stairs; fair condition.
15		c. 1830	Two-and-one-half-story, three-bay, brick residence; gabled roof and plain cornice; 1/1 windows; stone sills and lintels, water table; transom, sidelights and glazed and panelled door; stucco landing; good condition.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Parmenter Street</u>		
	17	c. 1825	Two-story, three-bay, residence; asbestos siding; gabled roof and bracketed cornice; 1/1 windows; modern glazed and panelled door; cement steps; fair condition.
	19	c. 1950	One-story, three-bay, brick residence; flat roof and plain cornice; door and windows obscured; non-contributing.
	21	c. 1880	Three-story, three-bay, brick residence; low-pitched gable roof, bracketed cornice and panelled frieze; door and windows obscured; arched brick lintels and stone sills; good condition.
	23	c. 1870	Two-and-one-half-story, three-bay residence; gabled roof, bracketed cornice and plain frieze; wide, shed dormer; clapboarded; 2/2, 6/6 and 1/1 windows; stone sills and lintels; panelled door with transom; cement steps; good condition.
	25	c. 1865	Two-story, three-bay, brick residence; flat roof, bracketed cornice and raised basement; 1/1 windows; arched brick lintels and stone sills; glazed and panelled door; altered entry steps; good condition.
	27	c. 1865	Two-story, three-bay, brick residence; flat roof and bracketed cornice; 1/1 windows; decorative brickwork; arched brick lintels and stone sills and water table; glazed and panelled door and sidelights; landing with rock-faced cinder block; good condition.
	29	c. 1865	Two-story, three-bay, brick residence; flat roof and bracketed cornice; 1/1 windows; radiating voussoirs and decorative brickwork; stone sills and water table; altered entry has only panelled door; cinder block landing; good condition.
	31	c. 1865	Three-story, three-bay, brick residence; flat roof and molded cornice; 1/1 windows; arched brick lintels and stone sills; evidence of first story cornice; panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Parmenter Street</u>		
	33	c. 1930	One-story, two-bay garage; flat roof with parapet; rock-faced cinder block; good condition.
	35	c. 1815	Two-story, three-bay residence; gabled roof and bracketed cornice; asbestos siding; 1/1 sash; panelled door with shed-roof hood; good condition.
	37	c. 1815	Two-story, five-bay residence; asbestos siding; gabled roof and plain cornice; 1/1 sash; panelled door.
	39	c. 1820	Two-story, three-bay residence; gambrel roof with cross gambrel; single and paired windows with 1/1 sash; tarpaper siding and permastone; panelled door; good condition.
	45-47	c. 1840	Three-and-one-half-story, six-bay double house; gabled roof; tarpaper siding; 1/1 sash; storefront enclosed with novelty siding; single door; residential entrances have vestibules with shed roofs; good condition.
	105	c. 1880	Four-story, three-bay brick commercial/residential structure; storefront altered and non-contributing; flat-arched windows with stone lintels and lintels; 1/1 sash; wooden bracketed cornice; fire escape; three-story frame oriel on side (William Str) elevation.
	8	c. 1835	Three-and-one-half-story, three-bay brick residence; gabled roof and aluminum-sided cornice; 1/1 sash; stone lintels and sills; transom, sidelights and panelled door; good condition.
	14	c. 1850	Two-and-one-half-story, three-bay residence; gabled roof with exposed rafters; 1/1 sash; tarpaper siding; altered door; late-nineteenth-century addition in rear; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
Parmer	<u>Parmenter Street</u>		
16		c. 1870	Three-story, three-bay brick residence, flat roof and plain cornice; 2/2 and 1/1 sash; stone lintels and sills; water table; glazed and panelled door, transom; porch has straight spindles and balusters and chamfered columns; good condition.
18		c. 1965	One-story, one-bay stucco and cobblestone garage; flat roof; glazed and panelled garage door; non-contributing.
20-22		c. 1820	One-and-one-half-story, six-bay tarpaper sided residence; gabled and plain cornice; obscured or missing windows and doors; altered porches; fair condition.
26		c. 1810	Two-story, five-bay residence; clapboarded; gabled roof and molded cornice; 1/1 sash; panelled door; cement landing and cobblestone railing.
30		c. 1820	Two-and-one-half-story, three-bay brick residence; gabled roof and plain cornice; 1/1 sash; stone sills and lintels and water table; glazed and panelled door, transom and sidelights; portico has plain cornice, Tuscan columns and straight balusters; good condition.
32		c. 1810	Two-story, three-bay clapboarded residence; gabled roof; and bracketed cornice; 1/1 and 2/2 sash; panelled door; portico has shed roof, straight posts and balusters; good condition.
36		c. 1840	One-story, four-bay residence; left side projects; gabled roof with pedimented end; asbestos siding and brick; 2/2 sash; two entries with glazed and panelled doors; good condition.
38		c. 1835	Two-and-one-half-story, three-bay residence; tarpaper siding; gabled roof and bracketed cornice; 3/3, 2/2 and 1/1 sash; modern, glazed and panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Parmenter Street</u>		
40		c. 1865	Two-story, three-bay residence; flat roof and bracketed cornice; brick and tarpaper siding; 2/2 and double 1/1 sash; panelled door with transom; shed-roof canopy; good condition.
42		c. 1860	Two-story, three-bay residence; gabled roof; tarpaper siding; 1/1 and 2/2 sash; panelled door with shed roof canopy; fair condition.
46		c. 1860	Two-story, three-bay residence; low-pitched gable roof, bracketed cornice and panelled frieze; aluminum-sided; 1/1 sash; panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Renwick Street</u>		
	65	c. 1890	Three-story, six-bay, brick industrial building; low-pitched gable roof; 2/2, 6/6 and small four-pane windows; radiating voussoirs; loading doors with modern glazed and panelled garage doors; good condition.
	67 - 75	c. 1890	Five attached three-story, three-bay brick row houses; flat roof, bracketed cornice and panelled frieze; 6/6 and 1/1 sash; double segmental arches over windows; stone sills; altered doors;
	77 - 79	c. 1950	One-story, four-bay industrial building; flat roof; rock-faced cinder blocks; bays sealed with new doors or windows cut in; non-contributing.
	81	c. 1890	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; brick lintels and stone sills; transom and altered door; good condition.
	95	c. 1890	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; three-sided, two-story bay on top two stories; tarpaper-sided; 1/1 windows; stone sills and lintels; double, glazed and panelled doors with transom; good condition.
	97 - 99	c. 1890	Two-story, six-bay, brick double house; flat roof, bracketed cornice and panelled frieze; arched and 1/1 windows; rock-faced stone sills, lintels basement and landings; two, two-story rounded bays; glazed and panelled doors with transoms; good condition.
	101	c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; arched and 1/1 windows; rock-faced stone sills and lintels; two-story, rounded bay; altered door; transom; new landing; good condition.
	103 - 103½	c. 1890	Two-story, four-bay, brick double house; raised basement of stone; flat roof; bracketed cornice and denticulated frieze and architrave; 1/1 win-

EAST END : HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Renwick Street</u> 103-103½ (cont'd.)		dows with stone lintels and sills; glazed and panelled doors; two rounded, full-height bays; good condition.
105		c. 1890	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 and 1/1 windows; stone lintels and sills; double, glazed and panelled doors with transom; three-story, three-sided bay; altered landing; good condition.
107		c. 1890	Two-story, three-bay, brick residence; flat roof, molded cornice and panelled frieze; 2/2 windows; stone sills and lintels; transom and altered door; porch has denticulated cornice and Tuscan columns on shingled railing; good condition.
109		c. 1915	Two-story, two-bay residence; hipped roof; shingled and clapboarded; 3/1 and 9/1 windows; two-tier porch has hipped roof, flared square posts on shingled railing; glazed and panelled doors; garage entry in basement; good condition.
115		c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels and water table; two-story, rounded bay; altered entry; two-story addition with garage; good condition.
117		c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 and 2/2 windows; double, radiating voussoirs; stone sills; two-story, three-sided bay; entry altered, panelled door remains; porch has turned members and cutwork brackets; good condition.
119 - 21		c. 1890	Two-story, four-bay brick double residence; flat roof, bracketed cornice and rope-type trim on frieze; 1/1 windows; rock-faced stone sills, lintels and water table; two two-story, rounded bays; transoms and glazed and panelled door and altered door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Renwick Street</u>		
	123 - 25	c. 1890	Four-story, three-bay, brick commercial/residential building; flat roof and bracketed cornice; 1/1 windows; rock-faced stone sills and lintels; three-story bay on top stories; storefront has cornice, recessed entrances, glazed and panelled doors, cast iron columns, display windows; good condition.
	129 - 131	c. 1905	Three-story, six-bay brick double residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; rock-faced stone sills, lintels and water table; two three-story, square bays; double, glazed and panelled doors; new landings; good condition.
	133 - 35	c. 1905	Three-story, six-bay brick double residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; rock-faced stone sills, lintels and water table; two, three-story, square bays; glazed and panelled doors; new landings; good condition.
	137	c. 1920	One-story, two-bay garage; flat roof; cinder block; glazed and panelled garage doors; non-contributing.
	139	c. 1920	One-story, two-bay commercial garage; flat roof; rock-faced cinder block; modern, panelled garage door; obscured windows; non-contributing.
	143	c. 1890	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 and 2/2 windows; radiating voussoirs; three-story, three-sided bay; double, glazed and panelled doors, arched transom; porch has plain cornice, turned members and cutwork brackets; good condition.
	145	c. 1890	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 and 2/2 windows; radiating voussoirs; three-story, three-sided bay; double, glazed and panelled doors; arched transom; good condition.
	147	c. 1900	One-story, two-bay commercial garage; cinder block; flat roof; large glazed and panelled garage door; panelled door; non-contributing.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Renwick Street</u>		
	149 Rear	c. 1900	Two-story, two-bay, carriage house/garage; flat roof; brick and tarpaper siding; double, 1/1 window; glazed and panelled garage door; contributing carriage house.
	149	c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two-story, rounded bay; double, glazed and panelled doors with transom; altered porch; good condition.
	153	c. 1890	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills and lintels; double, panelled doors; transom; good condition.
	155	c. 1890	Three-story, three-bay, brick commercial/residential building; low-pitched gabled roof, bracketed cornice and panelled frieze; storefront has plain cornice, recessed entry, cast iron columns, display windows, panelling, double, glazed and panelled doors, some alterations; 2/2 windows; stone sills and lintels; good condition.
	155½	c. 1890	Two-and-one-half-story, two-bay residence; gabled roof; tarpaper siding; windows altered; panelled door with canopy; good condition.
	157	c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two-story, rounded bay; double, glazed and panelled door; rock-faced stone and cement landing; good condition.
	159	c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two-story, rounded bay; double, panelled doors with transom; wooden landing; good condition.
	161	c. 1905	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; rock-



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Renwick Street</u> 161 (cont'd.)		faced sills and lintels; double, glaze and panelled doors with transom; good condition.
163		c. 1905	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; rock-faced sills and lintels; double, glazed and panelled doors; good condition.
167		c. 1905	One-story, one-bay, brick garage; flat roof; glazed and panelled garage door; non-contributing..
169		c. 1905	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; entry altered; porch has straight posts and railing; good condition.
169 Rear (on Clark)		c. 1890	One-story, two-bay garage; rock-faced cinder block; flat roof; glazed and panelled garage doors;
175 - 83		c. 1890	Five attached three-story, two-bay brick commercial/residential buildings; flat roof, bracketed cornice and panelled frieze; five three-sided, three-story bays, some sided; 1/1 and 2/2 sash; segmentally arched windows with stone sills; decorative brickwork; storefront has plain cornice, recessed entry, panelling, display windows; residential entries: double, glazed and panelled doors and transoms; some canopies.
185 -87		c. 1890	Three-story, six-bay brick double residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; altered doors; good condition.
189		c. 1890	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; double, radiating voussoirs and stone sills, double, glazed and panelled doors with transom; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Renwick Street</u>		
	191	c. 1890	Three-story, three-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 2/2 windows; double, radiating voussoirs and stone sills; storefront with bracketed cornice; display windows bricked up with new windows cut in; residential entry: double, glazed and panelled doors and transom; good condition.
	193	c. 1890	Three-story, three-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; missing or obscured windows, doors and storefront; later retains original format; poor condition.
	58 - 72	c. 1905	Three-story, multi-bay, brick industrial building; four-light and double 1/1 windows; glazed and panelled garage doors and metal doors; good condition.
	80	c. 1905	One-story, seven-bay garage; rock-faced cinder block and aluminum siding; flat roof with false front; originally garage with enclosed bays and windows and door cut in; non-contributing.
	100	c. 1890	Two-story, three-bay, brick commercial/residential building; flat roof and plain cornice; 1/1 windows; brick lintels and stone sills; glazed and panelled door with transom; storefront has display window and recessed entry; good condition.
	102	c. 1890	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; glazed and panelled door; canopy with straight spindles and brackets; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Renwick Street</u>		
104		c. 1890	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; pressed metal lintels with floral designs; altered entry; storefront area bricked in with altered fenestration; good condition.
106		c. 1890	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills and lintels; altered entry; good condition.
108		c. 1890	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; radiating voussoirs and stone sills and water table; double, glazed and panelled doors; transom; rock-faced cinder block landing; good condition.
110		c. 1890	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels and belt courses, water table; three-story, rounded bay; altered entry; rock-faced cinder block landing; good condition.
112		c. 1890	Three-story, two-bay residence; brick; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels, belt courses and water table; three-story, rounded bay; glazed and panelled door; rock-faced cinder block landing; good condition.
114 - 16		c. 1890	Three-story, five-bay brick double residence; flat roof, bracketed cornice and panelled frieze; # 116 has aluminum-sided cornice; full-height three-sided bay and square bay; 1/1 windows; rock-faced stone sills, lintels and base-ment; porch has denticulated cornice and turned columns on brick piers; glazed and panelled doors; good condition.
120		c. 1890	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; rock-faced stone sills, lintels and belt courses; glazed and panelled door canopy removed; good condition.

EAST END I HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Renwick Street</u>		
	122	c. 1890	Three-story, three-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two-story, three-sided bay, tarpaper-sided on top stories; altered storefront has canted corner with entry; residential entry: glazed and panelled door with transom; good condition.
	124	c. 1890	Three-story, three-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 1/1 windows; rock-faced stone sills, lintels and belt courses; storefront has cast iron columns, panelling, display windows, recessed entry; residential entry: double, panelled door with transom; good condition.
	126 - 28	c. 1890	Two-story, four-bay, brick double house; flat roof, bracketed cornice and panelled frieze; 1/1 windows; rock faced stone sills and lintels; two, three-sided, two-story bays; double, glazed and panelled doors with transom; new landing; good condition.
	130	c. 1910	One-story, one-bay garage; cinder block; flat roof; glazed and panelled garage door; non-contributing.
	132 Rear	c. 1910	One-story, one-bay garage; rock-faced cinder block, flat roof; glazed and panelled garage door; non-contributing
	132	c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; three-sided, two-story bay; double, glazed and panelled doors with transom; porch has denticulated cornice and turned members; good condition.
	134	c. 1890	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows, stone sills, lintels and water table; three-story, three-sided bay; double, glazed and panelled doors with transom; porch has denticulated cornice, Tuscan columns on new brick railing; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Renwick Street</u>		
	136	c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; rock-faced stone sills, lintels and water table; two-story, rounded bay; transom and panelled door; arched window with stained glass; rock-faced stone landing and basement; good condition.
	140 - 42	c. 1890	Two-story, four-bay, brick double house; flat roof, bracketed and aluminum-sided cornice and 2/2 windows; two, two-story, three-sided bays; double, glazed and panelled doors with transom; altered porches; good condition.
	144	c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two-story, three-sided bay; double, glazed and panelled doors with transom; porch has plain cornice, brackets and turned members; good condition.
	144 Rear (on Little Monument)	c. 1905	One-story, two-bay garage; flat roof; rock-faced cinder block; glazed and panelled garage doors; non-contributing.
	146 - 48	c. 1890	Three-story, four-bay, brick double house; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone water table, sills and lintels; two rounded, three-story bays; double, glazed and panelled doors with transoms; porches have molded cornices; cutwork trim, frieze, turned columns and straight balusters; good condition.
	158	c. 1890	Two-story, five-bay, residence; flat roof, bracketed cornice and panelled frieze; new wood and asbestos siding; altered door; porch has plain cornice and modern support structure; good condition.
	158 Rear	c. 1890	One-story, five-bay garage; cinder block; flat roof; glazed and panelled garage doors; non-contributing.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Renwick Street</u>		
168		c. 1890	Two-story, three-bay, brick residence flat roof, elaborately panelled cornice and frieze; 1/1 windows; double, radiating voussoirs and rock-faced stone sills and water table; glazed and panelled door; porch has panelled frieze; bargeboard, brackets, turned colsmns and straight balusters; good condition.
170		c. 1890	Two-story, three-bay, brick residence; flat roof, elaborately panelled cornice and frieze; 1/1 windows; double, radiating voussoirs; rock-faced stone sills and water table; two-story, rounded bay; glazed and panelled door; new brick landing; good condition.
172		c. 1890	Three-story, three-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 2/2 windows; radiating voussoirs and stone sills; storefront has bracketed cornice, cast iron columns, panelling, display windows, recessed entry; residential entry: glazed and panelled double door with transom; good condition.
172 Rear (on Clark)		c. 1905	One-story, two-bay garage; rock-faced cinder block; flat roof; glazed and panelled garage doors; non-contributing.
174 Rear (on Clark)		c. 1905	One-story, three-bay garage; rock-faced cinderblock; flat roof; glazed and panelled garage doors; non-contributing.
174 - 182		c. 1890	Five attached three-story, two-bay brick residences; flat roof, bracketed cornice (or side) and panelled frieze; 1/1 and 2/2 sash; rock-faced stone lintels and sills; two three-sided bays and two canted sides; new doors and glazed and panelled door.
184		c. 1890	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; arched lintels with keystones and stone sills with brackets; storefront bricked up with double window-cut in; entry lintel with keystone, transom and altered door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Renwick Street</u>		
	202	c. 1880	Two-story, three-bay rowhouse; raised basement; segmentally arched windows with keystone; iron sills; cornice aluminum sided; porch replaced; arched transom; 2/2 sash
	204	c. 1880	Two-story, three-bay rowhouse with raised basement; segmentally arched windows with keystone; iron sills; 2/2 sash; wooden bracketed cornice; replacement porch and door.
	206-208	c. 1880	Two-story double residence; two-story, three-sided bay; 2/2 sash; pent roof forming porch; raised basement; 206 -- asbestos-sided with aluminum cornice; 208 -- stuccoed; wooden bracketed cornice; replacement porch.
	210	c. 1880	Two-story, two-bay brick residence; two-story, three-sided bay; wooden bracketed cornice; segmentally arched window with 2/2 sash; Stick style entry hood; replacement porch; arched transom.
	212	c. 1880	Two-story, two-bay brick residence; two-story, three-sided bay; bracketed cornice; segmentally arched window with 2/2 sash; aluminum awning; replacement porch; arched transom.
	214	c. 1880	Two-story, two-bay brick residence; two-story, three-sided bay; aluminum cornice; segmentally arched window with 2/2 sash; aluminum awning; replacement porch and replacement Colonial entrance.
	216	c. 1880	Two-story, two-bay brick residence; two-story, three-sided bay; wooden bracketed cornice; segmentally arched window with 2/2 sash; replacement porch; arched transom.
	218	c. 1880	Two-story, two-bay brick residence; two-story, three-sided bay; wooden bracketed cornice; segmentally arched windows with 2/2 sash; original wooden porch.

EAST END I HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Renwick Street</u>		
	220	c. 1880	Two-story, two-bay brick residence; two-story, three-sided bay; wooden bracketed cornice; segmentally arched windows with 2/2 sash; replacement porch and entry.
	222-224	c. 1880	Three-story, four-bay brick double house; three-story, three-sided bays; segmentally arched windows with 2/2 and 1/1 sash; replacement porch; 222 has aluminum cornice; 224 has wooden bracketed cornice.
	<u>Riverview Place</u>		
	1	c. 1890	Two-story, two-bay, brick residence; full basement; flat roof, bracketed cornice and panelled frieze; 1/1 sash; double, glazed panelled doors with arched transom; porch removed, new wooden landing; good condition.
	2	c. 1890	Two-and-one-half-story, three-bay residence; hipped roof with round-arched dormer; clapboarded and facade is aluminum sided; two-and-one-half-story, square and three-sided bay with gabled roof; double, glazed and panelled doors; two-story porch has panelled pediment, turned columns and alterations; good condition.
	3	c. 1890	Two-story, three-bay, brick residence; flat roof; bracketed cornice with crest rail; windows and doors obscured; altered porch; good condition.
	4		See 14 R Overlook Place.
	<u>South Street</u>		
	81-85	c. 1870	Three attached three-story, three-bay brick residences; flat roof; bracketed cornice and panelled frieze; missing 2/6 and 2/2 sash; arched lintels, stor sills and water table; double, glazed and panelled doors with transoms and sidelights; good condition.
	95		See 206 R Grand Street
	111		See 203-205 R Grand Street.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South Street</u>		
	113	1876	One-and-one-half-story, three-bay brick church; gabled roof and vestibule; decorative trefoil and quatrefoil brickwork and belt course; Gothic pointed-arched windows with labels; decorative latticework in gable peaks; double, wooden doors; good condition.
	115-117	c. 1885	Three-story, four-bay brick double residence; flat roof; bracketed cornice and decorative frieze; two full-height, three-sided bays; 1/1 sash; stone lintels and water table; altered and double, panelled doors; stone landings with cast-iron railings.
	119	1890	One-and-one-half-story, three-bay, brick church; gabled roof with parapet arcaded facade; canted piers on corners; shingled dome roof on portico with classical entablature and Tuscan columns; 1/1 windows, wood doors and stone stairs; good condition.
	129-133	c. 1915	One-story, six-bay brick commercial structure; flat roof; storefronts have plate glass windows; transoms have carrara glass and recessed entries;
	135		See 168-74 R Chambers Street
	149-153	c. 1910	One-story, five-bay commercial structure; rock-faced cinder block; flat roof with stepped parapet; new windows and doors cut in former garage format; good condition.
	177-181	c. 1870	One-and-one-half-story, two-bay brick church; gabled roof with polychrome patterned slate, bargeboard; pointed-arched windows with diamond-pane, stained glass; stone lintels and belt course; buttresses; gabled portico with polychrome patterned slate, bargeboard chamfered columns, double doors, original brick landing; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South Street</u>		
	191	c. 1885	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels and water table; double, glazed and panelled doors; transom; good condition.
	193	c. 1885	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels and water table; two-story, rounded bay; double, glazed and panelled doors; transoms; good condition.
	197	c. 1885	Three-story, three-bay, brick commercial/residential structure; low-pitched gable roof, bracketed cornice and panelled frieze; 2/2 and 1/1 windows; stone sills and lintels; projecting storefront, metal-sheathed, window and recessed entry obscured; good condition.
	199	c. 1885	Three-story, three-bay, brick commercial/residential building; low-pitched gable roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; storefront has bracketed cornice with recessed entry with new door; cast iron columns, paneling; display windows; residential entry retains transom, new door; good condition.
	201	c. 1910	One-story, three-bay, brick commercial building; flat roof; display windows; glazed and panelled door; transom; non-contributing.
	205	c. 1910	One-story, three-bay commercial building; gabled roof with parapet; recessed entry with glazed and panelled door and transom; new display windows; sides of building novelty-sided; non-contributing.
	132	c. 1910, c. 1975	One-story, three-bay, stuccoed, commercial structure; flat roof with stepped parapet; redwood storefront and altered fenestration; non-contributing.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South Street</u>		
	134	c. 1870	Four-story, three-bay, brick commercial/residential building; flat roof. bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels and stone sills; altered storefront; good condition.
	136	c. 1865	Three-and-one-half-story, four-bay brick commercial/residential building; gabled roof; cross gable with barge-board; 6/6 and 6/1 windows; arched lintels and stone sills; storefront: cornice removed, display area, obscure recessed entry format; residential entry: panelled embrasure; arched transom and altered door; good condition.
	138	c. 1865	Two-story, three-bay, brick commercial residential building; flat roof and bracketed cornice; 1/1 windows; triple radiating voussoirs and stone sills; plain, one-story cornice storefront area enclosed with new door and window cut in; good condition.
	140	c. 1865	Three-story, three-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 2/2 and obscured windows; arched brick lintels and stone sills; storefront has bracketed cornice, new windows, recessed entry with obscured door and transom; new residential entry door; good condition.
	142	c. 1865	Three-and-one-half-story, three-bay, brick commercial/residential building; polychrome-slate gabled roof and bracketed cornice; 6/6 and 6/1 windows; stone sills and lintels; altered storefront; new windows, permastone, recessed entry with glazed and panelled door and transom; altered residential entry; good condition.
	142 Rear (on Chambers St)	c. 1905	One-story, three-bay, brick garage; flat roof with parapet; three bays have aluminum fillers to readjust fenestration; non-contributing.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South Street</u>		
	144	c. 1865	Three-and-one-half-story, three-bay, brick commercial/residential building; gabled roof and molded cornice; 6/6 windows; double arched stone lintels and sills; altered storefront with carrara glass panels; good condition.
	144 Rear (on Chambers)	c. 1905	One-story, three-bay, brick garage; flat roof; modern wooden doors with mansard type hood over doors; non-contributing.
	146 - 160	c. 1865	Eight attached two-and-one-half-story, three-bay brick row houses; cross-gabled roofs and bracketed cornice; arched casement and 1/1 sash; arched stone lintels, sills and water table; double, glazed and panelled doors and arched transoms; stone stairs and cast-iron railings.
	162	c. 1865	Two-story, three-bay, brick residence; mansard roof, molded cornice and plain frieze; 2/2 windows; arched stone lintels, sills and water table; double, glazed and panelled doors with arched transom; stone stairs and cast iron railing; very good condition.
	162 Rear (on Lander St)	c. 1905	One-story, two-bay garage; flat roof; rock-faced cinder block; glazed and panelled garage doors; non-contributing.
	166 - 76	c. 1870	Six attached three-story, three-bay brick row houses; mansard roofs and hooded dormers; 2/2 and 2/4 sash; bracketed cornices and panelled friezes; panelled lintels and sills with drip courses; double, glazed and panelled doors, transom; 174 -- roof painted blank but appears to retain slate; stone landings; some alterations.
	180	c. 1855	Two-story, three-bay, stuccoed residence; flat roof with deeply projecting eaves, exposed rafters; cupola; pilasters; 1/1 ogee-arched windows with labels; double, glazed and panelled doors, transoms with ogee arch; porch has exposed rafters; bargeboard, arcading and fluted columns; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South Street</u>		
	190	1880	One-and-one-half-story, three-bay, brick church; gabled roof, cast iron cornices and panelled frieze; cross with circle; decorative brick work; square tower with pyramidal roof and clipped-gable dormers; pointed-arched stained glass windows; flat-roofed vestibule with pediment; three, double recessed doors; good condition.
	194	c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; missing windows; radiating voussoirs; enclosed porch; shed-roof canopy; new glazed and panelled door; good condition.
	198 - 200	c. 1885	Three-story, four-bay brick double residence; flat roof, bracketed cornice and panelled frieze; two, five-sided; three-story bays; 1/1 and 2/2 windows; stone water table, sills and lintels; transom and glazed and panelled door; wooden landing with straight balusters good condition.
	202 - 206	c. 1885	Two-story, six-bay brick double residence; low-pitched gable roof; bracketed cornice and panelled frieze; three, five-sided, two-story bays; 1/1 windows; stone sills, lintels and water table; transoms and glazed and panelled doors; good condition.
	212 - 214	c. 1885	Three-story, four-bay, brick residence flat roof, barcketed cornice and panelled frieze; 1/1 windows; stone sills, lintels and water table; two, square bays with decorative brick panelling; glazed and panelled doors with transoms; portico has bracketed aluminum sided cornice, turned members and brackets; good condition.
	212 - 214 Rear (on DuBois St)	c. 1905	One-story, one-bay, clapboarded garage; gabled roof; wooden doors; non-contributing.

EAST END I HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Spring Street</u>		
	7	c. 1860	Two-story, three-bay residence; gabled roof and bracketed cornice; tarpaper siding; windows, doors and storefront obscured; good condition.
	13	c. 1855	Two-story, three-bay residence; gabled roof; aluminum siding; 1/1 windows; panelled door; good condition.
	15	c. 1855	Two-story, two-bay residence; gabled roof; aluminum siding; 1/1 windows; altered doors; good condition.
	17	c. 1950	One-story, two-bay, commercial garage; flat roof; glazed and panelled garage doors; single door and small window; non-contributing.
	19	c. 1915	One-story, three-bay, brick commercial garage; flat roof; stepped parapet with cement band and diamond-shaped decoration; altered and obscured garage doors and windows; good condition.
	21	c. 1865	Three-story, three-bay, brick residence partially stuccoed; gabled roof; bracketed cornice and plain frieze; 1/1 windows; modern door; good condition.
	27	c. 1885	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; two-story, three-sided bay; transom; door and portico altered; brick water table; good condition.
	29 - 31	c. 1885	Two-story, four-bay, brick double house; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; transoms; altered doors; facades two three-sided, two-story bays; good condition.
	33	c. 1885	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; rock-faced stone sills and lintels; glazed and panelled door; two-story, three-sided bay; good condition.
	35	c. 1885	Three-story, three-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 2/2 windows; canted side with panelled

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Spring Street</u> 35 (cont'd.)		door and transom; storefront has cast iron column and burned out section; good - fair condition.
12		c. 1860	One-and-one-half-story, three-bay, brick residence, raised basement; gabled roof with molded cornice; 6/6, 6/1 and 1/1 windows; stone sills and lintels; transom and panelled door; modern landing; good condition.
14		c. 1860	Two-story, three-bay, brick residence; gabled roof, bracketed cornice and windows missing; arched brick lintels; obscured door and transom; cement landing; good condition.
16		c. 1820	Two-story, five-bay residence; tarpaper and aluminum siding; gabled roof and bracketed cornice; windows and door obscured; cement landing; good condition.
18		c. 1915	One-story, one-bay garage, stuccoed; flat roof with stepped parapet; glazed and panelled garage door; good condition.
20		c. 1950	One-story, three-bay garage; flat roof cinder block; glazed and panelled garage doors; good condition.
22		c. 1865	Three-and-one-half-story, three-bay, brick residence; gabled roof, molded cornice and plain frieze; altered storefront; with new windows; altered door; good condition.
24		c. 1865	Two-story, three-bay, brick residence; flat roof and aluminum-sided cornice; 1/1 windows; arched brick lintels and stone sills; transom, modern door and plain hood; good condition.
26		c. 1865	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 6/6 and 2/2 windows, arched brick lintels and stone sills; transom, sidelights and glazed and panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Spring Street</u>		
	32	c. 1865	Two-and-one-half-story, three-bay residence; stuccoed; gabled roof and aluminum-sided cornice; 2/2, 1/1 and 6/6 windows; panelled door; landing with cinder block railing; good condition.
	38	c. 1855	One-and-one-half-story, four-bay residence; clapboarded; gabled roof and molded cornice; casement and eyebrow windows and picture window; one-story cinder block addition; with clapboarded false front; panelled door; good condition.
	<u>Third Street</u>		
	121	c. 1885	Two-and-one-half-story, two-bay, brick residence; mansard roof, dormers are pedimented dormers, bracketed cornice and ornate frieze; decorative brickwork on full-height, five-sided bay; 1/1 windows; stone sills, lintels and water table; double, glazed and panelled doors with transom; brick and stone landing with cast iron railing; good condition.
	123	c. 1890	Four-story, two-bay, brick residence; flat roof, elaborately panelled cornice, full-height rounded bay with decorative brickwork; glazed and panelled doors; 1/1 windows; stone lintels and water table; good condition.
	125	c. 1880	Two-and-one-half-story, three-bay, brick residence; gabled roof with pediment; 2/2 windows; stone sills, lintels and water table; five-sided bay; double, glazed and panelled doors with transom; encircling porch with denticulated cornice, columns on piers and turned balusters; good condition.
	127	c. 1870	Three-story, three-bay, brick residence with mansard roof; hooded dormers, bracketed cornice and panelled frieze; obscured windows and doors; stone sills and lintels with twisted rope type trim; one-story, five-sided bay; good condition.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Third Street</u>		
	129	c. 1870	Two-story, three-bay, brick residence with mansard roof; hooded dormers, bracketed cornice and panelled frieze; 2/2 windows; stone water table, sills and lintels with twisted rope-type trim; one-story, five-sided bay; double, glazed and panelled doors; transom; stone landing; good condition.
	131	c. 1870	Three-story, three-bay, brick residence; flat roof, bracketed cornice and decorative frieze; 2/2 windows; stone lintels and sills; water table; double, glazed and panelled doors with transom; panelled embrasure; good condition.
	133	c. 1865	Two-and-one-half-story, three-bay, brick residence; gabled roof and bracketed cornice; 1/1 windows; arched lintels, stone sills and water table; double, glazed and panelled doors; transom; portico with fluted square posts and turned balusters; attached garage; good condition.
	135	c. 1865	Two-story, four-bay, brick residence; flat roof and bracketed cornice; 2/2 windows; arched brick lintels, stone sills and water table; three-sided, two-story bay; arched transom; new door; landing; good condition.
	137	c. 1870	Two-story, three-bay, brick residence with mansard roof; gabled dormers and bracketed cornice; 1/1 windows; arched brick lintels, stone sills and water table; double, glazed and panelled doors; with transom; stone landing with cast iron stair rail; added bay with basement; non-contributing garage.
	139	c. 1880	Two-story, two-bay, brick residence with mansard roof, flared gable, dormers, bracketed cornice and rope-type trim on frieze; 1/1 windows; stone sills and lintels, water table; full-height, three-sided bay; stone landing with cast iron stair rail; double, glazed and panelled doors with transom; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Third Street</u>		
	139 Rear (on Lander St.)	c. 1905	One-story, one-bay, brick garage; flat roof with stepped parapet; panelled garage door; non-contributing.
	149		See 98 - 100 R Lander Street.
	151		See 100 R Johnston Street.
	167	c. 1920	Two-story, six-bay, brick laundry incinerator for St. Luke's Hospital; flat roof and plain cornice; altered and 6/6 windows; some with fanlight transoms; brick lintels with keystones; full basement; tall smokestack with decorative brickwork; good condition.
	201	c. 1870	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels and stone sills; double, glazed and panelled doors; transom; portico has mansard roof with crest rail; turned members and brackets; encircling porch has Tuscan columns on solid sided railing; good condition.
	205	c. 1875	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; paired and single 1/1 windows; radiating voussoirs; stone sills; porch has flared posts on solid railing; simple cornice; glazed and panelled door; transom; good condition.
	207	c. 1875	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; radiating voussoirs; stone sills and water table; portico has molded cornice and plain frieze; straight posts and balusters; double, glazed and panelled door; arched transom; good condition.
	207 Rear (on City Ter.)	c. 1900	One-story, two-bay, brick garage; flat roof and bracketed cornice; 6/6 windows; wooden garage doors; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Third Street</u>		
	209	c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; stained glass and 1/1 windows; stone sills, lintels and water table; five-sided, two-story bay; double, glazed and panelled door with transom; porch has turned members and brackets; good condition.
	211	c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; radiating voussoirs; stone sills and water table double, glazed and panelled doors, arched transom; wooden landing; good condition.
	213	c. 1880	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; rock-faced stone sills, lintels and belt courses, water table; double, glazed and panelled doors; landing with rock-faced stone railing; good condition.
	215	c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice, 2/2 windows; arched brick lintels and stone sills; brick water table; glazed and panelled door with transom; portico has bracketed cornice, turned members and brackets; good condition.
	217	c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; windows and doors obscured; radiating voussoirs; stone sills, porch removed; fair condition.
	219	c. 1880	Two-story, three-bay, brick residence with mansard roof; hooded dormers; bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels and stone sills; double, glazed and panelled doors; porch has bargeboard turned columns and brackets; good condition.
	221	c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels and water table; one-story, three-sided bay with mansard roof and crest rail; glazed and panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Third Street</u>		
223		c. 1880	Two-story, three-bay, brick residence with mansard roof; hooded dormers; bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels; glazed porch; glazed and panelled door; good condition.
225		c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills, lintels and water table; double glazed and panelled doors with transom cement landing; good condition.
227		c. 1880	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills, lintels and water table; five-sided, two-story bay; porch has molded cornice and plain frieze, Tuscan columns; double, glazed and panelled door with transom; good condition.
229		c. 1880	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; radiating voussoirs; stone sills and water table; five-sided, three-story bay with decorative brickwork; porch has denticulated cornice, Tuscan columns and turned balusters; double, glazed and panelled doors with transom; good condition.
231		c. 1880	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; rock-faced stone sills, lintels and water table; two-story, rounded bay; transom with glazed and panelled door; good condition.
233		c. 1880	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 and 1/1 windows; stone sills and lintels; two-story, rounded bay; porch has denticulated cornice and flared posts on brick piers, solid balustrade; double, glazed and panelled doors with transom; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Third Street</u>		
	235	c. 1880	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills, lintels and water table; full-height, five-sided bay with decorative brickwork; two-tier porch with turned members; double, glazed and panelled doors; good condition.
	237 - 39	c. 1880	Three-story, four-bay, brick residence flat roof, bracketed cornice and decorative frieze; 1/1 windows; rock-faced stone sills, lintels and water table; two full-height, five-sided bays; panelled embrasures; glazed and panelled doors, porch removed; good condition.
	241 - 43	c. 1880	Three-story, four-bay, brick residence flat roof, bracketed cornice; two, three-sided bays on top two stories; one frame and one sided; 1/1 windows; rock-faced stone sills and lintels; glazed and panelled doors with ogee transoms; good - poor condition.
	245	c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; rock-faced stone sills and lintels; glazed and panelled door; porch has bracketed cornice, turned members and brackets; east elevation has two-story, rounded bay; good condition.
	251	c. 1890	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; left square section projects; enclosed porch; glazed and panelled door; good condition.
	253	c. 1890	Two-story, three-bay, brick residence; flat roof and panelled frieze; 1/1 windows; rock-faced stone sills and lintels; glazed and panelled door with lintel; two-tiered porch has panelled frieze; bargeboard, turned columns; round, rock-faced stone archway and stone pillars; recessed, glazed and panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Third Street</u>		
	255	c. 1885	Two-story, two-bay, brick residence with stone facing; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; three-sided, second story bay; picture window; double, glazed and panelled doors; porch has Tuscan columns and straight balusters; good condition.
	257	c. 1905	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; rounded, three-story bay; 1/1 windows; stone sills and lintels, water table and basement; glazed and panelled doors; two-story giant portico with square posts; good condition.
	259	c. 1890	Two-story, two-bay, brick residence; flat roof and panelled frieze; 1/1 windows; rock-faced stone sills, lintels and water table; two-tiered porch has panelled frieze; turned columns, round, rock-faced stone archway and stone pillars; recessed, glazed and panelled door; good condition.
	261	c. 1915	Two-story, two-bay, brick residence; gambrel roof with wide shed dormer; paired 3/1 windows with stone lintels; cobblestone porch is enclosed; glazed and panelled door with sidelights; non-contributing garage.
	267 Rear	c. 1900	One-story, two-bay, brick carriage house; flat roof and bracketed cornice; glazed and panelled garage doors; contributing.
	267	c. 1900	Two-story, three-bay, brick residence; flat roof, bracketed cornice and decorative frieze; left section projects; 1/1 windows; stone sills and lintels; double, glazed and panelled doors; porch has turned members; good condition.
	269	c. 1900	Two-story, two-bay, brick residence; flat roof, bracketed cornice and decorative frieze; 1/1 windows; stone sills, lintels and water table; double glazed and panelled door with transom; porch has turned members and brackets; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Third Street</u>		
	271	c. 1905	Two-story, three-bay, brick residence; flat roof, bracketed cornice and decorative frieze; 1/1 windows; straight brick lintels and sills; second story, three-sided bay, shingled porch has Tuscan columns on shingled railing; glazed and panelled door; good condition.
	275	c. 1920	Two-and-one-half-story, two-bay brick residence; hipped roof and hipped dormer; porch has balustrade atop brick posts on brick piers; 1/1 windows; singled, modern, glazed and panelled door; good condition.
	277	c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; arched lintels, stone sills and water table; arched transom and glazed and panelled double doors; non-contributing garage.
	279	c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows, arched brick lintels, stone sills and water table; double, glazed and panelled doors with arched transom; cement landing; good condition.
	281	c. 1885	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; rock-faced stone sills, lintels and water table; double, glazed and panelled doors; new landing; non-contributing garage.
	287	c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; arched brick lintels, stone sills and water table; glazed and panelled door with sidelights and transom; good condition.
	291	c. 1870	Two-story, three-bay, brick residence; flat roof, bracketed cornice; aluminum sided; 1/1 windows with peaked surrounds; door surround with pediment sidelights and new door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Third Street</u>		
		c. 1970	One-story, two-bay, modern brick doctor's office; flat roof; bands of windows on facade and on side elevation; glass door; non-contributing.
128		c. 1870	Two-story, three-bay, brick residence with mansard roof; pedimented dormer and bracketed cornice; projecting bay with cross gambrel; 1/1 windows; stone sills and lintels, water table; double glazed and panelled doors; one-story, three-sided frame bay; good condition.
130		c. 1870	Two-and-one-half-story, three-bay, brick residence; cross-gabled roof with bargeboard; 2/2 windows and door in ogee arch recesses; decorative brickwork; stone water table; transom and double, glazed and panelled doors; good condition.
132		c. 1870	Two-and-one-half-story, three-bay, brick residence; cross-gabled roof with bargeboard; 2/2 windows and door in ogee-arched recesses, stone water table; cast iron railing and stone landing; double, glazed and panelled door; good condition
134		c. 1870	Two-story, eight-bay, brick residence with mansard roof; hooded dormers; bracketed cornice and panelled frieze; 2/2 windows; stone sills, lintels and water table; one-story, five-sided bay, entry obscured; landing with cast iron stair rail; good condition.
136		c. 1870	Two-and-one-half-story, three-bay, brick residence; cross-gabled roof with bargeboard, bracketed cornice; 2/2 windows; arched lintels, stone sills and water table; transom and double, glazed and panelled doors; portico has turned members and brackets; good condition.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Third Street</u>		
	140	c. 1870; 1890	Three-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; stained glass and 1/1 windows; rock-faced stone lintels sills and water table; one-story, three-sided frame bay; transom enclosed and new door; cement landing; with cast iron railing; good condition.
	142	c. 1870	Two and one half-story, three-bay, brick residence; cross-gabled roof; 4/4 windows; arched lintels, stone sills and water table; double, glazed and panelled doors; metal canopy with cast iron braces; stone landing with cast iron stair rail; good condition.
	142 (on Lander Street)	c. 1870	Two-story, one-bay, brick carriage house; cross-gabled roof with second story loading door; double door entry; good condition.
	144	c. 1885	Massive two-and-one-half-story, two-bay brick residence; cross-gabled roof rounded bay with conical roof with bracketed cornice; 1/1 windows; stone sills and lintels; porch has bold, turned columns, and is partially enclosed; pedimented gable; shingled railing; double, glazed and panelled doors with transoms; good condition.
	146	c. 1855	Two-and-one-half-story, four-bay, brick residence; cross-gabled, bracketed roof; 3/3 and 6/6 windows; arched lintels and stone sills; porch has bracketed cornice, pendants, brackets, square columns and decorative balustrade; one-and-one-half-story wing to east; double, glazed and panelled doors; good condition.
	150	c. 1885	Two-and-one-half-story, two-bay, brick residence; gabled roof; 1/1 windows with arched, brick lintels; porch has panelled frieze; turned members and braces; panelled, one-story three-sided bay; double, glazed and panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Third Street</u>		
152		c. 1870	Two-story, three-bay brick residence with mansard roof; hooded and gabled dormer; bracketed cornice; panelled facade; obscured and recessed double windows with 4/4 sash; double, panelled door and arched transom; porch has bracketed cornice, turned columns, brackets and straight balusters.
154		c. 1880	Two-story, two-bay, brick residence; mansard roof; flat-roofed dormers; bracketed cornice and panelled frieze; 1/1 sash; stone lintels and sills; one-story, three-sided frame bay; glazed and panelled door; porch has bracketed cornice; brackets, turned and straight columns; good condition.
166		c. 1880	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 sash; rock-faced stone lintels and sills; water table; double, glazed and panelled doors with transom; porch has simple cornice, plain frieze; flared posts on solid brick railing; good condition.

Downing Park

An approximately 34-acre park bounded by Robinson Ave. (west), South St. (north), Du-Bois Street (east) and Third St. (south), and bisected by Carpenter Avenue (north-south). City Terrace extends into the eastern end of the park and terminates. The topography rises nearly 75 feet from low points at the southwest and eastern portion to a high point at the mid-point of the northern edge of the park. Overall, the park is a mowed grassy space with road and walkways. Specimen trees scattered throughout the park create a canopy over most of the area. A two- to three-acre irregularly shaped artificial pond is located in the southwest corner of the park. It is spanned at a narrow point by a wooden arched bridge. A small, rock-walled island, a rustic post and rail fence, and a stone rest house distinguish the pond. Slightly east of the highest point, a pergola is situated to afford a dramatic view of the Hudson River. Serpentine road and walkways wind through the park with stone walls and planting areas enhancing the landscape. A small open-air theater with a round stage and seating, built of stone, and an evergreen backdrop is located north of the pond. Three monuments have been added to the park to commemorate local citizens, firemen and Civil War volunteers.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Van Ness Street</u>		
	5		See 17 R DuBois Street.
	7-9	c. 1905	One-story, three-bay brick commercial garage; flat roof with stepped parapet; three glazed and panelled garage doors; one glazed and panelled regular door and plate glass windows.
	11-15	c. 1905	One-story, five-bay commercial garage rock-faced cinderblock; flat roof with stepped parapet; three glazed and panelled garage doors; one glazed and panelled regular door and plate glass windows; good condition.
	10	c. 1865	Two-and-one-half-story, three-bay residence; asbestos siding; gabled roof; molded and bracketed cornice; 1/1 and 6/6 sash; panelled door with transom; simple hood and wood stairs.
	12	c. 1945	One-story, three-bay brick residence; flat roof; obscured windows and door; plain portico and cement steps; non-contributing.
	26	c. 1875	Two-story, three-bay, aluminum-sided garage; flat roof; second-story loading door; panelled garage doors; non-contributing.
	28-30	c. 1855	Attached pair of two-and-one-half-story, three-bay residences; asbestos siding; gabled roof; molded and/or bracketed cornice; three-light eyebrow windows; 1/1 and 6/6 sash; panelled and new doors; sidelights and transoms; classical portico with Tuscan columns and new porch.
	<u>Washington Street</u>		
	99		See 99 R Liberty Street
	101	c. 1865	Three-story, three-bay brick residence with low-pitched gable roof and bracketed cornice; 2/2 and 6/6 sash; brick lintels; modern door.
	103	c. 1865	Two-story, three-bay, brick residence gabled roof; 6/6 sash; three-light transom, sidelights and altered door; stone.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Washington Street</u>		
	105	c. 1855	Two-story, three-bay, brick residence; asbestos siding; low-pitched gable roof; bracketed cornice and panelled frieze; 1/1 sash; modern, panelled door.
	109	c. 1855	Two-story, three-bay, brick residence; low-pitched gable roof, bracketed cornice and plain frieze; glazed and panelled door; porch has Tuscan columns; plain cornice and turned balusters; 1/1 and 2/2 sash; stone lintels and sills.
	111	1870	One-and-one-half-story, three-bay brick church; gabled roof; flanking to smaller cross-gabled towers with pyramidal roof; stained glass windows and double, arched panelled doors; buttresses and belt courses.
	113	c. 1880	Three-story, three-bay, brick residence; flat roof; bracketed cornice and panelled frieze; altered 6/6 sash altered doorway and new door;
	115	c. 1855	Two-story, three-bay residence; gabled roof with exposed rafters; tarpaper siding; 1/1 sash; non-original panelled door.
	117		Three-bay cinder block garage; non-contributing.
	119	c. 1865	Two-story, two-bay residence; flat roof, plain cornice and frieze; tarpaper siding; 1/1 sash; glazed and panelled door on east elevation; porch has plain cornice, straight spindles, balusters and turned columns.
	121	c. 1855	Two-story, two-bay residence; gabled roof; tarpaper siding; windows and doors obscured; fair condition.
	123	c. 1865	Three-story, three-bay brick residence with flat roof, bracketed cornice and panelled frieze; windows and doors obscured; arched lintels and stone sills; good condition.
	125-131	c. 1900	Two-story, nine-bay, brick commercial building; flat roof, part with parapet; twelve-pane and modern sash; glazed, panelled and loading doors.

EAST      END      HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Washington Street</u>		
133		c. 1855	Two-story, three-bay residence; bracketed cornice and gabled roof; asbestos siding and permastone; 1/1 sash; modern door.
139		c. 1845	Two-story, six-bay residence; asbestos siding; low-pitched gabled roof with exposed rafter; 2/2 sash; glazed and panelled doors; gabled porticoes with square posts; good condition.
143		c. 1880	Three-story, three-bay brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 sash; stone lintels and sills; double, glazed and panelled doors; landing with elaborate cast-iron railing.
145		c. 1880	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 sash; stone lintels and sills; double, glazed and panelled doors; landing with elaborate cast-iron railing.

St. George's Cemetery      An approximately 11-acre Picturesque cemetery located on a hillside location which slopes upward gradually from the entrance on Washington St. to its southern side on S. William St. The cemetery is bordered on the two street boundaries by a fence with stone posts and iron spike sections. A distinctive gateway is located on Washington Street opposite South Johnson St. A winding road network is concentrated in the older, southern portion of the cemetery. Stones are generally small in size and white marble in material and date from the mid-nineteenth century. There are many obelisks, a few in brown sandstone with Gothic style designs. One mausoleum exists on the hill top. There are few plantings. Many stones have been vandalized and modern stones of similar form and scale have been added.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Washington Street</u>		
	159-167	c. 1880	Five attached three-story, three-bay brick row houses; low-pitched gabled roofs, bracketed cornices and plain friezes; 2/2 sash; stone sills and segmentally arched windows with two tiers; panelled embrasures; altered doors.
	175	c. 1900	Two-story, three-bay garage; brick with cinder block; flat roof, bracketed cornice and plain frieze; 1/1 sash; obscured windows; glazed and panelled door with transom; modern garage doors.
	Washington Street at William, Parmenter and Clark	c. 1960	Washington Street School -- non-contributing.
	86	c. 1865	Three-story, three-bay, brick residence; flat roof with bracketed cornice and panelled frieze; 2/2 sash; stone lintels, sills and water table; double, glazed and panelled doors with transom; cast-iron railing on landing
	88	c. 1865	Three-story, three-bay, brick residence; bracketed cornice, flat roof and panelled frieze; French and 4/4 sash; arched lintels with drip courses and sills; two doors altered; cast-iron porch and stair rail.
	90	c. 1865	Three-story, three-bay brick residence; flat roof; bracketed cornice and panelled frieze; French and 4/4 sash; arched lintels and drip courses and sills; doors altered; cast-iron porches and stair rail.
	92	c. 1870	Three-story, three-bay, brick commercial/residential building; flat roof; bracketed cornice and plain frieze; 1/1 sash; stone lintels and sills; double doors and transom; storefront altered. (Also 102-103 Liberty St.)
	100		See 101 R Liberty Street.

EAST END ( HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Washington Street</u>		
	102-104	c. 1860	Two three-story, three- and four-bay commercial residential buildings; flat roof, bracketed cornice and panelled frieze; 2/2 sash; arched brick lintels and stone sills; storefront has cast-iron columns, panelled door, display windows; residential entry has transom, double, glazed and panelled door.
	106	c. 1875	Three-story, two-bay brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 and 2/2 sash; segmentally arched windows; three-story, three-sided bay; double, panelled doors with transom; porch has plain cornice, panelled frieze, pilasters.
	108	c. 1900	Two-bay brick garage with gable roof; two three-part swinging doors with wood lintels.
	110	c. 1820	Two-story, three-bay residence; gabled roof with gabled dormer; tarpaper siding; 1/1 and 6/6 sash; transom and panelled door.
	144	c. 1850	Two-story, three-bay, brick residence gabled roof and bracketed cornice; 6/6 and 1/1 sash; stone sills and lintels; large window cut into basement; new doors and enclosed transom.
	146	c. 1865	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 sash; segmentally arched windows; transom, panelled embrasures and altered door.
	148	c. 1870	Two-story, three-bay residence; "L"-shaped gabled and flat roof; bracketed cornice and panelled frieze; asbestos siding; windows and doors missing.
	150	c. 1830	Two-and-one-half-story, three-bay residence; gabled roof; tarpaper siding; 2/2 sash; modern door; new portico.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Washington Street</u>		
	150A	c. 1915	One-story, one-bay filler building; flat roof; stepped brick parapet; asbestos siding; central panelled door is original.
	152	c. 1870	One-story, two-bay commercial building; flat roof; stuccoed; canted entry with glazed and panelled door.
	154-156	c. 1870	Three-story, six-bay, brick double residence; low-pitched gable roof and bracketed cornice; single and double 1/1 and 2/2 sash; arched brick lintels and stone sills; double, glazed and panelled doors with transom.
	160	c. 1840	Two-story, three-bay residence; gabled roof, bracketed cornice and tarpaper siding; 1/1 sash; double, glazed and panelled doors with transom; ornate classical overdoor, fluted pilasters, modern landing.
	162	c. 1830	Two-story, three-bay residence; gabled roof; tarpaper siding; 1/1 sash; bracketed cornice; transom and glazed and panelled door; new landing.
	166	c. 1860	Two-story, three-bay residence; asbestos siding; gabled roof, bracketed cornice and plain frieze; 1/1 sash; modern door and landing.
	168	c. 1860	Two-story, three-bay residence; tarpaper siding; gabled roof, bracketed cornice; 1/1 sash; glazed and panelled door with transom; porch has plain cornice, turned columns, and straight balusters.
	178	c. 1880	Three-story, two-bay, brick residence flat roof, bracketed cornice and panelled frieze; 1/1 and 2/2 sash; stone sills and lintels; three-story, three-sided bay; altered door.
	180-184	c. 1910	One-story, seven-bay, brick garage; flat roof with stepped parapet; modern panelled garage doors; non-contrib.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>Washington Street</u>		
	186-188	c. 1910	Two-story, four-bay, brick commercial building; flat roof, stepped parapet with brick panel below; four double windows set in arched recesses; modern doors and garage door.
	192	c. 1870	Three-story, three-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze 2/2 sash; segmentally arched windows with stone sills; storefront has bracketed cornice, bricked up with windows cut in.
	<u>William Street</u>		
	1	1930	One-story brick garage, entrance infilled with concrete block; parapet; side door; attached to rear of 191 Broadway; fair condition.
	3	c. 1830	Two-story, three-bay frame residence on raised basement; gable roof; storefront added at street level; asphalt siding; windows boarded over; poor condition.
	5	c. 1890	Baptist Temple -- Brick church structure with two-story gable facade and adjoining bell tower. Simplified Gothic windows and entrance; crenelated parapet on tower with elongated lancets in bell section; good cond.
	15	c. 1870	Three-story, two-bay brick residence; three-sided bay window extending full height; flat-arched windows with stone lintels and sills; 1/1 sash; wooden bracketed cornice; original porch at entry with turned posts and spindle frieze; good condition.
	17	c. 1895	Two-story, three-bay brick residence; two window bays projecting from entrance plane; flat-arched windows with stone lintels and sills connecting horizontal bands; 1/1 sash; wooden bracketed cornice with applied scroll sawn ornament; porch at entrance with turned posts and scroll sawn frieze; doorway recessed behind masonry screen; distinctive rough-faced, buff-colored brick; good cond.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>William Street</u>		
19		c. 1870	Three-story, two-bay brick residence; three-sided bay windows at all levels; flat-arched windows with stone lintels and sills; 1/1 sash; wooden bracketed cornice; replacement porch at entrance with turned posts on low brick wall at balustrade height; fair condition.
21		c. 1870	Two-story, two-bay brick residence; three-sided bay windows at both levels; flat-arched windows with stone lintels and sills; 1/1 sash; porch at entrance with chamfered posts, brackets and spindlework frieze, iron replacement railing; fair condition.
25		c. 1920	Masonry religious structure; brick and marble veneer and trim on facade; two domed towers flanking an entrance pavilion with two arched doorways; full-height arched windows in towers; entrances surmounted by blind oculus flanked by arched windows; fair cond.
51-53		c. 1880	Two-story, eight-bay brick commercial/residential building; flat roof and missing cornice; 2/2 sash; segmentally arched windows in two tiers; storefronts have cast-iron columns; recessed entry, display windows; alterations; residential entries altered.
55		c. 1870	Two-story, four-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; obscured windows and doors; arched brick lintels; storefront has cast-iron columns; recessed entry and new windows; fair condition.
57-59		c. 1880	Three-story, four-bay, brick commercial/residential building; flat roof; bracketed cornice and decorative frieze; obscured and 1/1 sash; stone lintels and sills; two two-story, three-sided bays; storefront has recessed entry, obscured display windows; obscured residential entries with transoms; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>William Street</u>		
61		c. 1870	Two-story, four-bay, brick commercial residential building; flat roof; bracketed cornice and panelled frieze 2/2 windows; arched brick lintels and rock-faced stone sills; storefront has bracketed cornice; recessed entry with door, display windows, panelling, cast iron columns; residential entry has double, glazed and panelled doors with transom; good condition.
63		c. 1870	Two-story, four-bay, brick commercial/residential building; flat roof and bracketed cornice; modern 1/1 windows; double radiating voussoirs and stone sills; recessed entry has glazed and panelled door with transom, storefront has recessed glazed and panelled door with transom; display window, some alterations; good condition.
65 - 65½		c..1870	Two-story, five-bay, brick commercial residential building; flat roof, bracketed cornice and panelled frieze new 1/1 windows; stone sills and lintels; storefront: bracketed cornice; altered; good condition.
67		c. 1880	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; obscured and 2/2 windows; brick lintels with brick keystones; stone sills; obscured door, good condition.
69		c..1880	Three-story, four-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; new 1/1 windows; stone lintel and sills; storefront altered with Corraera glass; residential entry has transom and modern door; good condition.
73		c. 1895	Three-story, two-bay, brick commercial/residential building; flat roof with stepped parapet, decorative cement and brickwork; single and paired 1/1 windows; storefront: bracketed cornice; residential entry and storefront obscured; good condition.

EAST END : HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>William Street</u>		
	75	c. 1865	Two-and-one-half-story, four-bay, commercial/residential building; tar-paper siding; gabled roof and aluminum-sided cornice; obscured windows and door; storefront has cornice, recessed entry, panelling; good condition.
	77	c. 1895	One-story, two-bay, brick garage; flat roof with cement band; panelled gargae doors; single, glazed and panelled door and transom; poor condition.
	79 - 83	c. 1885	Three attached three-story, four-bay brick commercial/residential buildings; flat roof and bracketed cornice with urns atop; 2/2 and 1/1 sash; stone sills and lintels; first-story bracketed cornice; residential entries with new glass panelled door with transom; storefronts: recessed entry, panelling, display windows; some alterations.
	85	c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; arched brick lintels with brick keystones; smooth stone sills; arched transom, new door and panelling; good condition.
	87	c. 1880	Two-story, four-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; storefront: bracketed cornice, display windows, recessed, glazed and panelled door and transom; residential entry has glazed and panelled door with transom; good condition.
	89	c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; radiating voussoirs with keystones; panelled door; new porch; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>William Street</u>		
91		c. 1885	Three-story, four-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; new 1/1 windows; cast iron sills with brackets; altered storefront; residential entry has modern glazed and panelled door; good condition.
91 Rear (on So. William Street)		c. 1910	One-story, two-bay, brick garage; flat roof, panelled garage doors; good condition; non-contributing.
93		c. 1880	Two-story, four-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 2/2 windows; stone sills and lintels; storefront: bracketed cornice, cast iron columns, panelling display windows; residential entry altered; good condition.
95		c. 1950	One-story, three-bay commercial building; tarpaper siding and new brick; glazed and panelled door flanked by plate-glass windows; non-contributing.
97		c. 1895	Three-story, four-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; stone sills and lintels; 1/1 windows; storefront has bracketed cornice, glazed and panelled door with transom; residential entry: double, glazed and panelled doors; good condition.
99		c. 1895	Two-story, three-bay, brick residence flat roof; stepped parapet with cement band; diamond-shaped brick panels; 1/1 windows; straight brick lintels and stone sills; recessed entry with landing; glazed and panelled door; good condition.
101		c. 1895	Two-story, four-bay, brick commercial/residential building; flat roof, stepped parapet with cement bands; square brick panels; 2/2 windows; stone sills and lintels; altered storefront retains bracketed cornice residential entry: glazed and panelled door with transom; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>William Street</u>		
	103	c. 1895	Two-story, four-bay, brick commercial/residential building; flat roof stepped parapet with cement band; storefront has recessed double, glazed and panelled doors with transom and display windows; residential entry: glazed and panelled door with transom; good condition.
	105	c. 1885	Two-story, three-bay, brick residence flat roof, bracketed cornice and panelled frieze; 1/1 windows; arched brick lintels with brick keystones; porch has denticulated cornice, Tuscan columns and straight balusters; double, glazed and panelled door with transom; good condition.
	107	c. 1895	Three-story, three-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 2/2 windows; radiating voussoirs and stone sills; altered storefront retains bracketed cornice; residential entry has modern door; good condition.
	109 - 111	c. 1895	Three-story, five-bay, brick commercial/residential building; flat roof bracketed cornice and panelled frieze; 2/2 windows; radiating voussoirs and stone sills; storefront with bracketed cornice; glazed and panelled door, transom; good condition.
	113	c. 1880	Two-story, three-bay, brick commercial/residential building; flat roof bracketed cornice and panelled frieze; storefront has bracketed cornice, cast iron columns and altered entry; 2/2 windows; double, radiating voussoirs and stone sills; good condition.
	115	c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; one-story, bracketed cornice; bricked-up storefront; residential entry: glazed and panelled door with transom; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>William Street</u>		
	117	c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and simple frieze; 1/1 windows; radiating voussoirs and stone sills; residential entry: new, glazed and panelled door; altered storefront; good condition.
	119	c. 1880	Two-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; radiating voussoirs and stone lintels; central two-story, three-sided bay with shingling and decorative brickwork; glazed and panelled doors with transom; brick water table; good condition.
	121	c. 1880	Three-story, four-bay, brick commercial/residential building; flat roof bracketed cornice; 2/2 windows; stone sills and lintels; residential entry double, glazed and panelled door with transom; porch with bracketed cornice and panelled frieze; storefront has recessed glazed and panelled door with transom and display windows; good condition.
	123	c. 1880	Three-story, three-bay, brick commercial/residential building; flat roof, bracketed cornice; obscured windows; projecting storefront and residential entry with transom; good condition.
	125	c. 1880	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 windows; radiating voussoirs and stone sills; obscured storefront has bracketed cornice; residential entry has new door and transom; good condition.
	127 - 129	c. 1885	Three-story, four-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; two-story bay on top two stories; tarpaper-sided; altered storefront has bracketed cornice; residential entry retains glazed and panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>William Street</u>		
	131 A		See 193 R Renwick Street
	131-143	c. 1880	Seven attached three-story, three-bay brick row houses; flat roof, bracketed cornice and panelled frieze; 1/1 and 2/2 sash; two-tiered, segmentally arched windows with stone sills; arched or rectangular transoms; panelled and/or glazed doors; some alterations; good condition.
	2	c. 1870	Three-story, three-bay brick commercial/residential structure with street level storefront; flat-arched windows with stone lintels and sills; 2/2 sash; wooden bracketed cornice; attached to rear of 193 Broadway; fair condition.
	4	c. 1870	Three-story, three-bay brick commercial/residential structure with street level storefront; corbelled, segmentally arched windows; 2/2 sash; wooden bracketed cornice; fair condition.
	6	c. 1870	Three-story, three-bay brick commercial/residential structure with street level storefront; corbelled, segmentally arched windows; 2/2 sash; wooden bracketed cornice; fair condition.
	8	c. 1870	Three-story, three-bay brick commercial/residential structure with street level storefront; corbelled, segmentally arched windows; 2/2 sash; wooden bracketed cornice; fair condition.
	10	c. 1870	Three-story, three-bay brick commercial/residential structure with street level storefront; corbelled, segmentally arched windows; 2/2 sash; wooden bracketed cornice; fair condition.
	12	c. 1870	Three-story, three-bay brick commercial/residential structure with street level storefront; corbelled, segmentally arched windows; 1/1 sash; wooden bracketed cornice; fair condition. Rear of Ann Street.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>William Street</u>		
	14-18	c. 1920	One-story commercial building with three storefronts; non-contributing.
	20	c. 1870	Three-story, three-bay brick commercial/residential structure; intact storefront; flat-arched windows with stone lintels and sills; 2/2 sash; wooden bracketed cornice; good cond.
	22	c. 1930	Two-story, three-bay brick commercial/residential building; later 1950's storefront with plastic (pseudo-carrara) panels and aluminum trim and signage; yellow-glazed brick; paired windows; 1/1 sash.
	24	c. 1850	Three-story, three-bay brick residence on raised basement; flat-arched windows with stone lintels and sills; 6/6 sash; later metal cornice; later porch spans facade.
	26	c. 1850	Two-and-one-half-story, three-bay brick residence on raised basement; flat-arched windows with stone lintels and sills; 1/1 sash; box cornice; storefront added to facade with steps down to home entrance.
	34-36	c. 1900	Two-story stuccoed frame commercial structure; four bays wide with altered storefront; non-contributing.
	38	c. 1900	One-story frame commercial structure; storefront altered and sided; enamelled metal panels; incorporated into 34-36 William Street; non-contributing.
	40	c. 1900	One-story frame commercial structure; intact storefront; box cornice; sign panel; poor condition.
	42	c. 1880	Three-story, three-bay brick commercial/residential structure; intact storefront; flat-arched windows with stone lintels and sills; 2/2 sash; wooden bracketed cornice.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>William Street</u>		
	44-48	c. 1960	One-story commercial structure with two storefronts and an overhead door; non-contributing.
	56	c. 1860	Two-story, four-bay commercial/residential building; tarpaper siding and permastone; flat roof and bracketed cornice; 1/1 sash; storefront has display windows; glazed and panelled door and transom; altered residential entry good condition.
	58	c. 1860	Two-and-one-half-story, three-bay residence; gabled roof and bracketed cornice; tarpaper siding; windows and entry missing or obscured; good condition.
	60-62	c. 1860	Three-story, six-bay commercial/residential structure; clapboarded; flat roof, bracketed cornice and panelled frieze; 6/6 sash; obscured windows; garage bays cut into first story; good condition.
	64	c. 1880	Three-story, four-bay brick commercial residential building; flat roof, bracketed cornice and panelled frieze; 1/1 sash; stone lintels and sills; storefront has decorative bracketed cornice recessed entry and obscured display windows; residential entry; double, glazed and panelled door with transom; good condition.
	66	c. 1880	Three-story, four-bay, brick commercial/residential building; flat roof; bracketed cornice and panelled frieze; 2/2 sash; segmentally arched windows with stone sills; bracketed cast-iron cornice; altered storefront with glazed and panelled door and transom; residential entry; transom and altered door; good condition.
	72	c. 1870	Two-story, three-bay brick commercial, residential building; flat roof, bracketed cornice and panelled frieze; 2/1 sash; segmentally arched windows with stone sills; storefront and entry obscured; good condition.
	74	c. 1895	Two-story, four-bay, brick commercial, residential building; flat roof .

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>William Street</u>		
74		c. 1895	Two-story, four-bay brick commercial/residential building; flat roof, stepped parapet with cement band and brick panel; 1/1 sash; stone lintels and sills; altered storefront has bracketed cast-iron cornice; residential entry altered; good condition.
76		c. 1880	Two-story, four-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 1/1 sash; stone lintels and sills; storefront has decorative cast-iron cornice; recessed entry and obscured windows; residential: glazed and panelled door with transom; good cond.
78-80		c. 1880	Three-story, eight-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 1/1 sash; segmentally arched windows with stone sills; altered storefronts have recessed entries; residential entry: glazed and panelled door with transom; passageway through building; good condition.
82		c. 1880	Three-story, four-bay brick commercial residential building; flat roof, bracketed cornice and panelled frieze; 2/2 sash; segmentally arched windows with stone sills; storefront has bracketed cast-iron cornice, display windows and glazed door; residential entry: double glazed and panelled door with transom; good condition.
84		c. 1895	Two-story, four-bay, brick commercial, residential building; flat roof, rounded parapet with brick panel; paired windows with 1/1 sash; altered storefront retains original format with recessed entry; residential entry: transom and new door; good condition.
86		c. 1895	Two-story, four-bay brick commercial/residential building; flat roof, stepped parapet with brick panel; 2/2 sash; segmentally arched windows with stone sills; altered storefront has cast-iron cornice and original format with recessed entry; residential entry transom and new door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>William Street</u>		
	88-90	c. 1900	Two-story brick commercial structure capped gabled parapet at roofline; storefronts in-filled for residential use.
94		c. 1885	Three-story, four-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; two-story, three-sided bay; asbestos siding; storefront has display windows; recessed entry, cast iron columns and panelling; residential entry: altered transom and door; good condition.
96		c. 1895	Two-and-one-half-story, three-bay, brick residence; gabled roof with shingled gable ends; shed dormer; ornate terra cotta panels; 6/6, 2/2 and 1/1 windows with stone lintels and sills; porch with turned columns and decorative railing; glazed and panelled door;
98		c. 1895	Two-and-one-half-story, three-bay brick residence; gabled roof with shingled gable ends; shed dormer; 6/6, 2/2 and 1/1 windows; stone lintels, and sills; ornate terra cotta panels; porch has straight spindles, turned columns and decorative railing; glazed and panelled door; good condition.
100		c. 1895	Two-and-one-half-story, three-bay, brick residence; gabled roof with shed dormer; 6/6, 2/2 and 1/1 windows; stone lintels and sills; ornate terra cotta panels; porch has square posts and decorative railing; glazed and panelled door; good condition.
102		c. 1895	Two-and-one-half-story, three-bay, brick residence; gabled roof with shed dormer; 6/6, 2/2 and 1/1 windows; stone lintels and sills; ornate terra cotta panels; porch has new posts and decorative railing; glazed and panelled door; good condition.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>William Street</u>		
104		c. 1905	Three-story, four-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; storefront has bracketed cornice, panelled door with transom; cast iron columns and panelling; residential entry: double, glazed and panelled door with transom; good condition.
106		c. 1905	Three-story, three-bay, brick commercial/residential building; flat roof, bracketed cornice and decorative frieze; 1/1 windows; stone sills and lintels; storefront has bracketed cornice and altered, recessed entry; residential entry: double, glazed and panelled doors with transom; good condition.
108		c. 1905	One-story, two-bay, brick commercial structure; flat roof with pediment and molded cornice; modern, glazed and panelled garage door and display window; good condition.
110		c. 1905	Three-story, three-bay, brick residence; was also commercial; flat roof, bracketed cornice and panelled frieze; 1/1 windows; stone sills and lintels; storefront has cornice, cast iron columns, and altered display windows; double, glazed and panelled doors with transom; good condition.
112		c. 1880	Two-story, four-bay, brick commercial/residential building; flat roof, bracketed cornice and panelled frieze; 2/2 windows; brick lintels with keystones and cast iron sills; storefront has denticulated cornice, display windows, panelling and recessed door; residential entry: transom and altered door; good condition.
114 - 122		c. 1880	Six attached two-story, three-bay brick commercial/residential buildings; flat roof, bracketed cornice and panelled frieze; 2/2 sash; arched brick lintels with keystones; cast-iron sills; storefronts have double, glazed and panelled doors with transoms, display windows, some panelling.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>William Street</u>		
	114-122 (cont'd.)		alterations; residential entries: double, glazed and panelled doors, transoms, some alterations; good cond.
	124-128	c. 1880	Two-story, eleven-bay, brick commercial residence; flat roof, bracketed cornice, panelled frieze; 2/2 sash; arched brick lintels and cast-iron sills; double, glazed and panelled doors, some with transoms; storefronts have glazed and panelled doors, display windows and panelling, alterations; plain second-story porch and gabled portico with straight spindles, chamfered columns and solid railing.
	130-132	c. 1880	Three-story, four-bay brick commercial/residential building; flat roof, bracketed cornice and panelled frieze 2/2 sash; stone lintels and sills; altered storefront has cornice, display windows, recessed entry, cast-iron columns; residential entry: double, panelled doors with transom.
	<u>South William Street</u>		
	85	c. 1905	One-story, three-bay, brick garage; flat roof with stepped parapet; panelled and/or glazed doors; non-contributing.
	111	c. 1900	One-story, six-bay, brick industrial building; flat roof; multi-paned industrial windows with continuous brick lintels; double, panelled door; altered cargo door; good condition.
	113-119	c. 1900	Two-story, six-bay brick industrial building; flat roof with stepped parapet, multi-paned industrial windows with straight brick lintels; doors altered; good condition.
	123-129	c. 1890	Four attached three-story, three-bay, brick row houses; flat roof, bracketed cornice and panelled frieze; 2/2 sash; stone lintels and sills; three-sided, two-story bays on top stories; clapboarded and shingled or tarpaper-sided; first-story cornices; glazed and panelled doors with transoms.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South William Street</u>		
135		c. 1905	One-story, six-bay garage; vertical board and modern garage doors; cinder block; flat roof; non-contributing.
137		c. 1905	One-story, three-bay garage; cinder block; flat roof; altered doors; non-contributing.
139-141		c. 1890	Three-story, six-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 sash; stone lintels and sills; double, glazed and panelled doors with transoms; good condition.
143		c. 1890	Three-story, three-bay, brick residence; flat roof, bracketed cornice, panelled frieze; 2/2 sash; stone sills and lintels; transom and sidelights, panelled door; good condition.
143 Rear (on Little Monument St.)		c. 1915	One-story, two-bay garage; cinder block; panelled garage doors; non-contributing.
147-151		c. 1915	One-story, multi-bay, commercial/industrial building; brick and rock-faced cinderblock; obscured windows and doors; non-contributing.
153-157		c. 1915	One-story, four-bay garage, cinder block; glazed and panelled and vertical board garage doors; non-contributing.
161-163		c. 1905	Two-story, four-bay, residence; flat roof; cinder block; 2/2 and 1/1 sash; portico has flared posts on cement railing; glazed and panelled door with transom; obscured display window and garage door; non-contributing
165		c. 1905	One-story, three-bay garage; rock-faced cinder block; flat roof; glazed and panelled garage doors; non-contributing.
167		c. 1890	Two-story, three-bay residence; low-pitched gable roof and plain cornice; 1/1 sash; segmentally arched windows with stone sills; portico has plain cornice; trim and turned members; double, glazed and panelled doors.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South William Street</u>		
	167 Rear (on Clark Street)	c. 1905	One-story, two-bay garage; flat roof; cinder block and stuccoed; vertical-board and glazed and panelled garage doors; non-contributing.
	171	c. 1890	Two-story, two-bay, brick residence; flat roof; bracketed cornice and rope-type trim on frieze; 1/1 sash; rock-faced stone sills and lintels; water table; double, glazed and panelled doors with transom; cast-iron hood; two-story, rounded bay.
	173	c. 1890	Two-story, two-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 sash; rock-faced stone sills and lintels, water table; double, glazed and panelled doors with transom; two-story, rounded bay.
	175	c. 1890	Two-story, four-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 sash; segmentally arched windows with stone sills; double, glazed and panelled doors; canopy with turned spindles and straight brackets.
	177	c. 1905	One-story, two-bay brick garage; flat roof, stepped parapet with cement band; glazed and panelled garage doors; non-contributing.
	193	c. 1880	Three-story, three-bay brick residence with flat roof and wooden bracketed cornice; stone lintels and sills; full-width wooden porch with columns; altered entrance; 1/1 sash
	195	c. 1880	Three-story, three-bay brick residence with flat roof and wooden bracketed cornice; stone lintels and sills; full-width wooden porch with columns; altered entrance; 1/1 sash.
	207	c. 1880	Three-story, two-bay brick residence; flat roof, wooden bracketed cornice; stone lintels and sills; 1/1 sash; original wooden porch and entrance.



EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South William Street</u>		
211		c. 1880	Three-story, two-bay brick residence; flat roof; wooden bracketed cornice; tooled stone lintels and sills; original wooden porch and entrance.
98		c. 1895	Three-story, two-bay brick residence; flat roof, bracketed cornice and panelled frieze; three-story, three-sided bay; 1/1 and 2/2 sash; stone lintels and sills; double, glazed and panelled doors with transom; porch has plain cornice, turned members and brackets; rock-faced cinder block base.
102-118		c. 1910	Two-story, eighteen-bay, brick factory building with flat roof; recessed multi-paned industrial windows; altered first-story windows; metal doors.
122		c. 1890	Two-story, three-bay brick residence; flat roof and aluminum cornice; 2/2 sash; stone lintels and sills; porch is aluminum-sided with new brick; glazed and panelled door with transom and sidelights.
124		c. 1890	Three-story, three-bay, brick residence; flat roof, bracketed dentil cornice and panelled frieze; 2/2 sash; stone lintels and sills; double, glazed and panelled door with transom
126		c. 1890	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 2/2 sash; segmentally arched windows with stone sills; transom, double, panelled door storefront bricked up.
128		c. 1890	Three-story, four-bay brick residence flat roof, bracketed cornice and panelled frieze; 2/2 sash; brick lintels and stone sills; double, panelled door with transom; storefront bricked up.
176		c. 1890	Three-story, three-bay, brick residence; flat roof, bracketed cornice and panelled frieze; 1/1 sash; segmentally arched windows with keystone and stone sills; arched transom and non-original panelled door.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South William Street</u>		
178			See 91 R William Street
190		c. 1880	Two-story, three-bay brick residence with commercial entrance on corner and residential entrance on S. William; wooden bracketed cornice; rectangular transom; replacement door; stone sills and lintels.
192		c. 1880	Two-story, three-bay brick residence; flat roof, wooden bracketed cornice; segmentally arched windows with keystones; stone sills; arched transom; 2/2 sash; panelled and dentil frieze.
194		c. 1880	Two-story, three-bay brick residence; stone lintels and sills; wooden bracketed cornice; flat roof; 1/1 sash; rectangular transom; panelled and dentil frieze; replacement full-width porch.
196		c. 1880	Two-story, three-bay brick residence; aluminum cornice; stone lintels and sills; 1/1 sash; full-width porch with replacement balustrade; altered entrance.
198		c. 1885	Three-story, three-bay brick residence; wooden bracketed cornice; segmentally arched windows with stone sills; 2/2 sash; panelled and dentil frieze; full-width porch with replacement balustrade; arched transom; original panelled doors with oval bevelled glass.
200		c. 1880	Three-story, three-bay brick residence; wooden bracketed cornice; segmentally arched windows with stone sills; full-width porch; column replaced with cinder blocks; altered entrance.

EAST END HISTORIC DISTRICT, NEWBURGH, ORANGE COUNTY, NEW YORK

<u>PHOTO#</u>	<u>STREET &amp; NUMBER</u>	<u>DATE</u>	<u>ARCHITECTURAL DATA</u>
	<u>South William Street</u>		
	202	c. 1880	Two-story, three-bay brick residence; segmentally arched windows with 1/1 sash; wooden bracketed cornice; aluminum awning; altered entrance.
	204	c. 1880	Two-story, three-bay brick residence; flat roof; wooden bracketed cornice; segmentally arched windows with 1/1 sash; altered entrance.
	206	c. 1880	Two-story, three-bay brick residence; aluminum sided; flat roof; aluminum cornice; replacement sash; altered entrance.
	208	c. 1880	Two-story, two-bay brick residence; flat roof; wooden bracketed cornice; two-story, three-sided bay; stone lintels and sills; 1/1 sash; original wooden entrance porch.

## 8. Significance

Period	Areas of Significance—Check and justify below			
<input type="checkbox"/> prehistoric	<input type="checkbox"/> archeology-prehistoric	<input type="checkbox"/> community planning	<input checked="" type="checkbox"/> landscape architecture	<input type="checkbox"/> religion
<input type="checkbox"/> 1400-1499	<input type="checkbox"/> archeology-historic	<input type="checkbox"/> conservation	<input type="checkbox"/> law	<input type="checkbox"/> science
<input type="checkbox"/> 1500-1599	<input type="checkbox"/> agriculture	<input type="checkbox"/> economics	<input type="checkbox"/> literature	<input type="checkbox"/> sculpture
<input type="checkbox"/> 1600-1699	<input checked="" type="checkbox"/> architecture	<input type="checkbox"/> education	<input checked="" type="checkbox"/> military	<input type="checkbox"/> social/
<input checked="" type="checkbox"/> 1700-1799	<input type="checkbox"/> art	<input type="checkbox"/> engineering	<input type="checkbox"/> music	<input type="checkbox"/> humanitarian
<input checked="" type="checkbox"/> 1800-1899	<input checked="" type="checkbox"/> commerce	<input checked="" type="checkbox"/> exploration/settlement	<input type="checkbox"/> philosophy	<input type="checkbox"/> theater
<input checked="" type="checkbox"/> 1900-1935	<input type="checkbox"/> communications	<input type="checkbox"/> industry	<input type="checkbox"/> politics/government	<input type="checkbox"/> transportation
		<input type="checkbox"/> invention		<input type="checkbox"/> other (specify)

Specific dates 1750-1935 Builder/Architect Multiple

### Statement of Significance (in one paragraph)

The East End Historic District is historically and architecturally significant as an intact concentration of historic buildings and sites which chronicle the development of the City of Newburgh from its mid-eighteenth century settlement period until the conclusion of a 150-year period of population growth and economic expansion in the mid-1930's (period of significance: 1750-1935). Little more than a small hamlet at the beginning of the American Revolution, Newburgh's strategic location in the mid-Hudson Valley first led it to military prominence during the War for Independence and later to commercial prominence as the eastern terminus of an important inland turnpike in the early nineteenth century. Newburgh's greatest period of development occurred in the second half of the nineteenth century and early years of the twentieth century when it achieved regional supremacy as an industrial and manufacturing center with a population of over 30,000. This 150-year continuum of growth and development is represented at each important stage by significant buildings and neighborhoods within the historic district. Included are architecturally significant examples of vernacular building practices unique to Newburgh, as well as numerous examples of progressive and sophisticated architectural design and landscape architecture, many by nationally recognized leaders in these fields. Especially prominent in the historic district are the contributions of Alexander Jackson Davis, Frederick Clarke Withers, Calvert Vaux and Frederick Law Olmsted—leaders of the Picturesque Movement in the mid-nineteenth century. Brought together in Newburgh by Alexander Jackson Downing, this cadre of creative designers had a profound influence on architectural tastes and landscape design during the nineteenth century which extended well beyond Newburgh and outlived the brief association of these men. Despite massive economic decline since 1935, the historic resources contained within the East End Historic District reflect the quality and diversity characteristic of Newburgh's distinguished architectural heritage.

The city now known as Newburgh was first settled in the winter of 1708-1709 by a party of 53 Palatine refugees from the war torn middle Rhine region of Germany. Sponsored by the English government, this party included one Lutheran minister, one carpenter, one smith, one clerk and eight husbandmen, one of whom was also a vintner. Their land was eventually divided into nine large lots. In 1719, the settlers were granted a 2190-acre patent entitled the "Palatine Parish by the Quassaick," deriving its name from its proximity to the Quassaick Creek which now forms the southern boundary of the city of Newburgh. This patent formed the basis for a 500-acre "glebe" which was to be rented and administered by the trustees of the settlement for the benefit of the minister and the Lutheran Church. It also set aside 40 acres for the establishment of roads and highways.

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh,

Continuation sheet Orange Co., New York

Item number

8

Page

2

For NPS use only

received

date entered

The initial settlement was centered in the area of Newburgh north of First Street and east of Liberty. A burial ground still extant in the historic district was established at the western edge of the settlement near Liberty Street and South Street, and it was here that a small wooden "glebehouse" was erected in 1733, apparently serving the dual purpose of church and school. In the 1730's and 1740's, new settlers arrived at the parish by the Quassaick, several with French Huguenot origins (including the Hasbrouck family), and many others with Scotch-English origins. By 1743, the growing influence of the Scotch-English settlers led to their rechristening of the eastern portion of the settlement between First and Broadway with the Scotch place name, "Newburgh." By 1747, this element of the population outnumbered the Lutheran Palatines, and sumarily wrested control of the glebe for their own benefit. At the same time, the newcomers forcibly removed the Lutherans from their church building and began holding services for the Church of England in it. In 1752 additional streets in the northeast section of the city were laid out, including South Clinton, Nicoll, North, Water, Montgomery, Grand, South and Broad streets, almost all of which are included within the historic district.

Industries in mid-eighteenth century Newburgh included husbandry carried on by the Palatine families, the production of lumber and ships stores, shipbuilding, whaling, and a small but prosperous river and coastal trade, with Newburgh sloops regularly communicating with ports in the West Indies. Mills were established near the settlement, particularly along the Quassaick Creek. Jonathan Hasbrouck, grist mill operator, built his house in 1750 at the fringe of the Newburgh settlement near what is now the southeastern corner of Washington and Liberty in the historic district. Built of stone in a vernacular tradition, the house remains in an excellent state of preservation. It is now a New York State Historic Site, commemorating its use in 1782 and 1783 as Washington's Headquarters. Aside from its recognized historical significance during the Revolutionary War era, the house is architecturally significant as the only mid-eighteenth century building remaining in the historic district. Its preservation recalls the vernacular character of Newburgh's built environment prior to and during the Revolution.

Newburgh became an independent "precinct" (township), then in Ulster County, in 1762 with its own elected officials, and in 1772, with the establishment and secession of the Town of New Marlborough, the town of Newburgh was reduced to its existing boundaries. On the eve of the American Revolution, its principal settlement, Newburgh, was still a relatively small, riverfront hamlet, later described in 1891 by John J. Nutt, (apparently working from primary sources), as having "but few opened streets, the

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

For NPS use only  
received  
date entered

East End Historic District, Newburgh,

Continuation sheet Orange Co., New York

Item number

8

Page 3

principal one being the King's Highway (Liberty Street), along which were scattered a few odd-looking brown houses, the old church, the parsonage and the schoolhouse. ...There were seventeen houses in all on the Glebe (since known as "old Town"), and four at Colden's Gore (intersection of Water and Colden Streets)... At the south end of the King's Highway was the Hasbrouck House... The hillsides were covered with orchards. A strip of land along the river from Barclay Street to North Street was called the Dismal Swamp, and was covered with a dense and unbroken thicket."<sup>1</sup>

Nutt also mentions a public dock and ferry at the foot of the settlement along the Hudson River. This ferry, and Newburgh's location sixty miles north of New York City and above the Hudson Highlands, contributed greatly to its strategic significance during the Revolution, especially during the British occupation of New York City, when it served as a critical link between the New England colonies to the east and middle Atlantic colonies south and west. Docks, storehouses and barracks buildings were built in Newburgh beginning in 1777 to facilitate and protect communications and the transport of personnel and military goods back and forth across the river at this point, and the population of the hamlet swelled with the arrival of refugees from New York City and the continual quartering of troops both in and around the settlement.

By 1782, the main body of the Continental Army was encamped in the general vicinity of Newburgh and West Point, and on March 21 of the year, Washington established his headquarters in the Jonathan Hasbrouck house. From his strategic vantage point, Washington and his officers directed the final year of the war, while observing the activities of the main British force in New York City. It was from this location in June 1783 that Washington began the dissolution of the Continental Army.

Newburgh survived the war virtually unscathed (some shots were fired upon the hamlet as British warships sailed north in a 1777 campaign which resulted in the burning of Kingston); however, its shipping and shipbuilding industries were devastated by the five-year blockade imposed on New York City by the British, and the resulting cessation of all river trade. At the close of the war, the docks, storehouse and barracks built by the army found new uses in the historic district. Only the Hasbrouck House, preserved as a historic site by New York State since 1850, remains to recall Newburgh's prominent military role during the Revolutionary War.

Another casualty of the war was the Church of England, suffering from its close identification with the loyalist cause for several decades after the war. The church became so unpopular in Newburgh that after 1793, there was no longer an ecclesiastical beneficiary managing the proceeds of the glebe.

<sup>1</sup> John J. Nutt, Newburgh, (Newburgh: Ritchie & Hull, 1891), p. 24.

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh,  
Orange Co., New York

Continuation sheet

Item number 8

Page 4

For NPS use only

received

date entered

Newburgh appears to have experienced modest growth in the final two decades of the eighteenth century. A portion of the Benjamin Smith farm was platted in 1782, establishing First, Second, Third, Fourth, Fifth and Smith Streets, in addition to extensions of South, Water and Montgomery streets. Other tracts were rapidly opened up in adjoining sections of the settlement as well, requiring the town's road commissioner to meet in 1790 to establish through north-south connections between the disjointed plots. The existing grid-like street pattern in the historic district today is largely the product of this effort and earlier work by the glebe in 1752.

Census figures for 1790 indicate a population of 2365 for the township. It would seem likely that at least one-third of this total resided in the growing hamlet of Newburgh at the time. By 1798, when the townships in Ulster and Orange Counties were redistributed and Newburgh was adjoined to Orange and designated as one of the county's two "halfshires," the settlement was large enough to support four sloop lines, a post office, a newspaper, an academy and a fire department. In 1800, Newburgh became an incorporated village.

Newburgh's rise as commercial center of statewide prominence began in 1801 with the incorporation of the Newburgh-Cochecton Turnpike Co., which built a road connecting Newburgh with Bloomingburgh, Monticello and Cochecton, and which linked the Hudson River tidewater with the upper reaches of the Delaware River. Prior to the completion of the Erie Canal in 1825, the turnpike provided one of the chief routes to the interior of the country and was frequently traveled by westward-bound settlers from the southern New England states. Eventually the turnpike was extended further west, providing connections to Ithaca and other areas in the Southern Tier, Finger Lakes, and Western regions of New York State by 1819. As a result, Newburgh's economic sphere of influence extended several hundred miles inland, well illustrated by the establishment of a branch of the Newburgh Bank in Ithaca in 1820. Three additional turnpikes were established with Newburgh as a terminus by 1812. By this time, Newburgh was well into a three-decade period of growth and prosperity still evident in isolated portions of the historic district.

Newburgh's extant turnpike and related river trade era legacies include Broadway, the wide east-west thoroughfare which formed the eastern end of the Newburgh-Cochecton turnpike and led it down to the docks along the river. Although Broadway now reflects a much later architectural character, it remains historically significant within the district for its association with the turnpike. A second legacy of this period of growth in the village

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh,

Continuation sheet Orange Co., New York

Item number

8

Page

5

For NPS use only

received

date entered

is illustrated by the Parmenter-Spring-Washington Street neighborhood, which survives as the only significant concentration of early nineteenth century houses in the historic district and the only neighborhood which still reflects the land use patterns and scale characteristic of Newburgh as a village between 1800 and 1825. Subdivided in the late eighteenth century on Hasbrouck family lands, this small neighborhood contains a variety of vernacular one- and two-story frame and brick houses crowded together along narrow streets a pattern probably typical elsewhere in early Newburgh, but in other neighborhoods long since replaced by more intensive development. Two house types are typical in this neighborhood; the two-story, five-bay center entrance house with end chimneys illustrated by 26 Parmaenter Street, built c. 1810, and the one- or two-story, three-bay side entrance house illustrated by 110 Washington Street, built c. 1820. Both house types feature gable roofs parallel to the street and originally featured Federal style millwork and proportions. Although the integrity of individual buildings in this neighborhood is compromised, the neighborhood as a whole retains its distinctive, early nineteenth century form and character.

More impressive Federal style houses of the turnpike and early river trade era are evident in the northeastern section of the historic district. The best examples include 388 Grand Street, built c. 1810 in the two-story, five-bay center entrance mode, and the 1829 David Crawford House, distinguished by its two-story Ionic and Palladian window pediment, at 184 Montgomery Street. Built for the principal of one of Newburgh's early nineteenth century shipping companies, the Crawford House features exceptionally sophisticated period woodwork including a modillion-supported cornice and an entrance embellished with ellipse-motif sidelights and transom, all of which suggests the wealth and sophistication of Newburgh's early nineteenth century entrepreneurial class.

Also reflecting Newburgh's early nineteenth century prosperity and its New England architectural traditions within the historic district are the frame buildings along the north side of First Street between Grand Street and Liberty Street. These include the 1821 Federal style First Associate Reformed Church at 91 Grand Street, built in the New England meeting house tradition with two-story elevation and a central tower and belfry at the gabled facade, and five connected rowhouses built in 1836 and known as "Quality Row," an old connotation referring to the row's historical status as a fashionable address. Designed by Newburgh architect Thornton M. Niven, these houses reflect an architectural transition from the Federal style, popular in Newburgh until 1835, to the Greek Revival style which



**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh,

Continuation sheet Orange Co., New York

Item number 8

Page 6

For NPS use only  
received  
date entered

predominated after 1840. The combination of the church and the five rowhouses represents one of Newburgh's finest early nineteenth century streetscapes and provides an excellent illustration of the scale and architectural character of the growing village in the 1830's.

Newburgh's regional supremacy as a center in inland trade and commerce was seriously challenged in the 1820's and 30's: first by the completion of the Erie Canal in 1825, which connected the western regions of New York State with the Hudson River at Albany, and a few years later in 1828 by the completion of the Delaware and Hudson Canal, connecting the resource-rich upper Delaware valley and the coal fields of Pennsylvania with the Hudson River at Kingston. Although the turnpike remained an important route for westward settlers and stage lines for several decades, Newburgh's influence as a center of inland trade began to wane after 1830, especially in relationship to Albany's rapid, canal-related growth. Despite these unfavorable developments, the village of Newburgh continued to experience modest growth and economic diversification, developing a growing trade in local agricultural exports, textiles, milling, and brick manufacturing, and numerous small-scale industries ranging from silversmiths to breweries. Newburgh's population grew steadily during the first half of the nineteenth century from 3,078 in 1822 to 13,905 in 1860.

The continuing growth of the late 1830's and the resurgence of prosperity due to Newburgh's thriving steamboat trade along the Hudson in the 1840's and 1850's is represented in the historic district by the westward expansion of rowhouses into Liberty Street, Chambers Street and Landers Street, and by the presence of a number of prominent buildings in the district in the Greek Revival fashion. Foremost among these examples is the monumental Protestant Reformed Dutch Church at 150 Grand Street, completed in 1838 and designed by the nationally prominent architect Alexander Jackson Davis (1803-1892). Davis, who is especially renowned for his contributions to the aesthetic ideals of the Picturesque Movement, continued to turn to classical models for major public and institutional commissions throughout his career. Davis's temple-like Reformed Church, designed with an Ionic portico and sited at the edge of a bluff overlooking the Hudson River, was intended to form the centerpiece of an acropolis-like collection of civic architecture; it represents the first and certainly one of the finest examples of the Greek Revival architecture in the city. Perhaps inspired by Davis's early example, local architect Thornton M. Niven (1806-1895) designed the 1841 Orange County Courthouse, across the street from the church at 127 Grand Street, in a similar prostyle manner based on Doric order. Other congregations in Newburgh responded to the popularity of the style as well, including

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh,

Continuation sheet Orange Co., New York

Item number

8

Page 7

For NPS use only

received

date entered

St. George's Episcopal Church, which updated its 1819 Georgian style church building c. 1835 with the addition of a high-style Greek Revival belfry and clock tower, attributed to the prominent New York City practitioner of the style, Calvin Pollard.

Although several large houses were designed in the Greek Revival style during this period in Newburgh, including the large stucco-faced stone house east of the 1913 YMCA Building at 54 Grand Street in the historic district, the popularity of the style is more pronounced in the extensive rowhouse development west of the old town in the 1840's and 1850's. As in other growing urban centers in New York State during this period, a two-and-one-half story rowhouse type developed, characterized by a three-bay, side entrance facade, rectangular openings and lintels, a raised basement, broad frieze band with short attic frieze windows, a low pitched gable roof, and two principal chimneys located above the party wall at the parlor side. A number of examples of this rowhouse type are present in the historic district including a pair of houses at 173 and 175 Lander Street. Several unusual variations of this type seen in the historic district appear, however, to be unique to Newburgh. One variation seen frequently on Chambers Street (Nos. 51 through 55) and again on Lander Street (Nos. 169-171) incorporates segmentally arched window and door openings within recessed panels at the facade, while still retaining the overall form, proportions, and wide frieze band characteristic of the more typical Greek Revival rowhouse model. Another unusual variation represented in the historic district consists of a rowhouse type with a two-bay facade, retaining the characteristic frieze band, but also employing segmentally arched window and door openings. Rows of this type occur at 49-59, 63-71 and 77-83 Lander Street, and appear to date from the 1850's.

Commercial buildings of this period also reflected some of the features of the Greek Revival style; however, few survive in Newburgh today due to the obliteration of the city's principal nineteenth-century commercial center east of the historic district in the 1960's and 1970's by urban renewal. One surviving store building, perhaps characteristic of commercial buildings of the 1840's, is located at 85 Liberty Street. This corner building is three stories in height with a gable roof and features a three-bay facade above an open storefront. A similar building is present at 101 Liberty Street and also appears to date from the 1840's.

In this same period, a divergent architectural theme began to emerge in Newburgh which profoundly influenced the architectural practices

United States Department of the Interior  
National Park Service

National Register of Historic Places  
Inventory—Nomination Form

For NPS use only
received
date entered

East End Historic District, Newburgh

Continuation sheet Orange Co., New York

Item number

8

Page

8

and aesthetic tastes of the nation by the mid-nineteenth century. Led by Newburgh native Andrew Jackson Downing (1815-1852), the Picturesque Movement, as it is now termed, professed an anti-urban, anti-industrial design philosophy which stressed sensitivity to the native landscape. Downing wrote prolifically from his Gothic villa in Newburgh through the 1840s and frequently collaborated with Alexander Jackson Davis in developing Gothic villas and cottages for wealthy clients. Downing was a prolific writer and many of his works were published and widely disseminated.<sup>2</sup> Downing and Davis were also closely allied with the leading figures of the Hudson River School of painting, and by 1850, his Newburgh villa and studio had become well known as a place where creative talents came together and were mutually inspired. In 1850, Downing traveled to England, returning with Calvert Vaux (1824-1895) who began as an associate of Downing's with principal responsibility for architectural design. In the following year, Downing again traveled abroad, returning later that year with Frederick Clarke Withers (1828-1901), an architect apprenticed in the London office of Thomas Henry Wyatt. Also present at Highland Gardens in 1851 was Frederick Law Olmsted (1822-1903), who worked with Downing as a landscape consultant. Downing's life and his creative contributions to the Picturesque Movement were cut short prematurely in 1852 when he drowned following the explosion of the steamboat Henry Clay. Vaux and Withers continued as principals in the Downing firm until 1856, when they established independent careers and practices in New York City and Newburgh, respectively. Withers continued to practice in Newburgh until 1863, but in 1866, he rejoined Vaux in New York.

The East End Historic District reflects the Picturesque Movement and the work and/or influence of Downing and his associates, particularly along Montgomery and Grand Street, north of Broadway. One of Newburgh's earliest examples of Picturesque era architecture is "Tuscan Villa," the Tuscan-Italian residence of General William C. Hasbrouck built in 1838 at 99 Montgomery St. Later, and more typical residential designs of the Picturesque period (from the 1850s) are evident at 208, 216, and 235 Montgomery Street and at 264 and 288 Grand Street, all characterized by complex roof profiles, decorative Gothic bargeboards and, in some cases, by Gothic-arched doorways and projecting bay windows. Residences at 196 Montgomery Street and 180 Grand Street closely resemble designs first published by Vaux in 1857 in Villas and Cottages, and both retain evidence of their original landscaped grounds. Other impressive residences directly attributed to Downing, Vaux and Withers are located outside of the city of Newburgh in the early affluent suburb of Balmville.

<sup>2</sup>Titles which earned Downing national prominence in the fields of horticulture, landscape architecture, and domestic architecture included A Treatise on the Theory and Practice of Landscape Gardening, Adapted to North America (1841), Cottage Residences, Rural Architecture and Landscape Gardening (1842), The Fruits and Fruit Trees of America (1845), and the Architecture of Country Houses (1850). "Highland Gardens," Downing's home and studio in Newburgh, was built in 1840 in the Gothic mode. Located between Liberty, Grand, Broad and Nicoll Streets in the historic district, the house and grounds were destroyed in the late nineteenth century and developed with much smaller single-family residences.

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

For NPS use only

received

date entered

Continuation sheet East End Historic District, Newburgh,  
Orange County, New York Item number 8

Page 9

The popularization of the Gothic style, both by the Picturesque Movement and by the Ecclesiological Movement, is reflected in the historic district by two important church designs by Withers: the 1858 First Presbyterian Church of Newburgh (207-215 Grand St.), considered to be one of the first ecclesiologically "correct" Gothic churches built for the American Presbyterian Church, and St. Paul's Episcopal Church, begun in 1865 at 259 Grand Street, but still unfinished. Other important Gothic Revival style churches of this period in the historic district include St. Patrick's Roman Catholic church at 65 Grand Street, expanded and extensively remodelled in the Gothic Revival style in 1860 by Rembrandt Lockwood; the 1861 Trinity Methodist Episcopal Church at 237 Liberty Street, also by Lockwood; and the Union Presbyterian Church at 70 First Street, designed by E. K. Shaw and completed in 1872.

The picturesque influence is also evidenced in the historic district in some of the rowhouses built on Chambers, Lander, South and Johnson Streets beginning in the 1850s. Most of these unusual houses are two stories in height, with three-bay facades and deeply pitched gabled wall dormers with Gothic bargeboards. The type is particularly well represented by intact rows at 191-197 Chambers Street and 85-87 Lander Street, near the northern fringes of what at that point represented the built-up portion of the village.

A final legacy of the Picturesque Movement and the influence of Downing and his associates in the district dates from later in the century, well after Newburgh's incorporation as a city. Designed in 1887 by Vaux and Olmsted and named in memory of the "father of landscape architecture in America," Downing Park embodies the naturalistic ideals of the movement in its early years as well as the extensive experience in landscape architecture gained by the two nationally prominent masters in the intervening years. Olmsted & Vaux's important commissions included the design of Central Park in New York City, Prospect Park in Brooklyn, and numerous other parks, parkways, cemeteries, campuses and estates throughout the eastern states. Downing Park incorporates many of the design features typically associated with the work of Olmsted & Vaux including water bodies, roads and paths which take advantage of the contours and topography of the site, the careful design of vistas, created by selective clearing and planting, and the establishment of observation areas to take advantage of specially framed views. The design of Downing Park expresses Olmsted's philosophy that landscapes be created as sequential experiences, each spatial area designed with a unique character, scale and personality.

Newburgh's rise to prominence as a regional center of industry and manufacturing began in 1850 with the long-awaited arrival of its first railroad connection, ultimately important in attracting large-scale industrial development through the inducement of cheap and readily available coal. Previous efforts to secure a rail connection to the interior and the coal fields of Pennsylvania dated back to 1829, first in response to the diversion of trade by the Delaware and Hudson Canal away from Newburgh, and later in 1845 when business leaders attempted to secure the eastern terminus of Erie Railroad in Newburgh. When that failed, Homer Ramsdell

**United States Department of the Interior  
National Park Service****National Register of Historic Places  
Inventory—Nomination Form**

For NPS use only
received
date entered

East End Historic District, Newburgh,  
Continuation sheet Orange County, New York Item number

8

Page 10

and other prominent business leaders subscribed to one-third of the cost of building a branch line between Newburgh and the Erie Railroad. Completed in 1850, this line, which terminated at the riverfront, opened the way for half a century of industrial prosperity and urban growth in Newburgh.

The Civil War spurred the growth of textiles and iron foundries, and upon its conclusion, Newburgh was chartered as a city, with a population of over 14,000. In the years which immediately followed, two new railroads arrived in Newburgh, extending rail service to New York City and southern New England. By 1875, seven relatively new steam engine works in Newburgh were contributing to at least fifty percent of the city's growing industrial output. Newburgh's post Civil War prosperity is reflected in the historic district by the continued westward expansion of rowhouse development into Johnson, Miller and DuBois Streets and by mixed commercial and residential development southward along Broadway, Liberty and Washington Streets. (Although an industrial belt was taking shape along the riverfront during this period, most of it has since been destroyed through urban renewal and could not be included within the historic district.)

The predominant architectural styles associated with Newburgh's development in the 1860s and 1870s were the Italianate style, typically characterized in Newburgh's urban dwellings by flat facades, segmentally arched openings and wooden bracketed cornices, and the Second Empire style, almost always distinguished by the presence of mansard roofs. Concentrations of both rowhouse types are present on Johnson Street, North Miller Street, DuBois Street, Grand Street and Washington Street. Representative examples of the numerous Italianate style rowhouses include the three-story rowhouses at 44-52 South Miller Street, built c. 1875. Good examples of Second Empire style rowhouses are evident at 24-26 and 27-29 Du Bois Street. Stylistically similar commercial buildings, illustrating variations on both of these popular styles, are present along both sides of Broadway and on the west side of Liberty Street, south of Broadway, illustrating the expansion of commercial activity south and west of its historic core during the 1860s and 1870s. The prosperity of this period also resulted in the construction of detached Second Empire style residences for the city's leading industrialists and entrepreneurs, especially in the fashionable neighborhood between Liberty Street and Montgomery Street. Excellent examples of this house type, many of which are located on generous landscaped lots, occur at 222, 226, and 230 Montgomery Street, 5-7, and 295 Grand Street and 39 Johnson Street. The Westminster Reformed Presbyterian Church at 169 Grand Street, rebuilt in the Second Empire style in 1872, represents the only church building designed in this style in the historic district. Grammar School No. 2, at 103-107 Grand Street, was also built in 1872 and represents the only education building of this popular style remaining in the historic district. The 1877 Newburgh Free Library at 100-102 Grand Street, designed by the prominent New York City architect John A. Wood, is an outstanding example of Venetian Gothic architecture of the period and one of Newburgh's finest surviving Victorian-era designs.

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

For NPS use only  
received  
date entered

East End Historic District, Newburgh,  
Continuation sheet Orange County, New York Item number

8

Page 11


The 1880s in Newburgh witnessed accelerated industrial development, expansion of the city's transportation networks and rapid population growth, rising from 18,049 in 1880 to 23,087 in 1890. Fueled by relatively inexpensive coal, the manufacturing sector grew to include a large boiler factory, a large lawnmower factory, a major engine and refrigeration equipment factory, a brush factory, several bleacheries and breweries, a paint works, a gas plant, numerous textile factories and clothing manufacturers, a major shipbuilding and drydock facility, wireworks, foundries, furniture factories, a paper box factory and soap manufacturers in addition to the already established steam engine works previously mentioned. Newburgh also became prominent for its export of building materials, and by the 1880s, the city was reputed to have the largest plaster works in the world. Newburgh's extensively developed port facilities led to the construction of a major coal depot here by the Pennsylvania Coal Co., which brought coal into Newburgh from Pennsylvania by rail and shipped it out by barge to New York City and other Atlantic Coast cities. After 1881 and the completion of the New York and New England Railroad (connected to Newburgh via steam rail ferry), coal was also shipped at competitive rates from Newburgh's port to the New England cities of Hartford, Springfield, Worcester, Providence, Waterbury, Norwich and Boston. Spin-offs from the coal depot and traffic developing in Newburgh's port included expanded brick manufacturing, an operation particularly well-adapted for the use of large quantities of cheap coal dust, now readily available locally.

Industrialization in late nineteenth century Newburgh dramatically affected the city's built environment and aesthetic character. In the historic district, this industrial growth is manifested in surviving industrial buildings in the vicinity of Johnes, Edwards and Colden Streets, continued expansion of rowhouse development into the streets west of DuBois and south of South William Street, and by the development of the Washington Heights neighborhood at the southern end of the city. Architecturally, the period is marked in the historic district by a modest number of "high-style" Richardsonian Romanesque and Queen Anne style houses and institutional buildings, in addition to hundreds of brick rowhouses with projecting window bays, designed to meet the demand for housing by the city's growing middle and lower middle classes.

Included among the large-scale factory buildings surviving in the historic district from this period is the three-story brick Newburgh Steam Boiler Works at 1-13 Colden Street, much of the plant dating from an expansion in 1891. Newburgh Steam Boiler was significant as one of the state's largest boiler plants, supplying marine boilers to shipyards (including that of T. S. Marvel in Newburgh, builder of tugboats and Hudson River steamboats) and others for use in central heating systems for large buildings in New York City. Other surviving factory buildings in the area of the historic district south of Washington's Headquarters are the Whitehill Engine and Pictet Ice Machine Company factory at 44-62 Johnes Street, largely built in 1890, the Newburgh Paper Box plant at 80-88 Colden Street, built c. 1880,

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**



East End Historic District, Newburgh  
Continuation sheet Orange County, New York Item number

8

Page 12

and an unidentified manufacturing complex at 2-8 Johnes Street. Its standard brick mill construction, with regularly placed segmentally arched windows and a low-pitched gable roof, is typical of the once numerous factory buildings common in the eastern sections of the city before urban renewal.

It was during this period that Broadway first began to assume its current shape as the city's leading commercial avenue. Constrained by adjoining residential neighborhoods north and south of the city's historic commercial core (surrounding the intersection of Colden and Water Streets), new and growing business concerns rapidly developed vacant or underdeveloped lots along the old turnpike route, until by 1900, the majority of the existing buildings on Broadway had been completed. Many of the commercial buildings built during or after 1870 on Broadway were three to four stories in height with cast-iron storefronts, three bays in width and typically featured the segmentally arched windows and bracketed wooden cornices commonly associated with the Italianate style. Among the best examples of this type are the contiguous store buildings at 279-185 Broadway, built c. 1870, and the continuous rows of Italianate style store buildings at 156-178 Broadway, which present striking period streetscapes as they march westward, up the steep gradient along Broadway between Johnson Street and DuBois Street. Public buildings followed this westward expansion as illustrated by the construction of the State Armory at Johnson and Broadway in 1879, designed by the noted Victorian-period architect John A. Wood in a castellated Victorian Gothic style, and the Columbian Hose Company building, built in 1889 at 255 Broadway and featuring a finely crafted, rock-faced stone facade, and upper story windows with unusually fine stained-glass transoms. One of the city's major churches followed this westward expansion as well, choosing to build their new church building at the southeastern corner of Mill Street and Broadway in 1890. Designed by New York City architect Frank Wright in a modified Gothic style, the Church of the Good Shepherd incorporates a tall, crenellated tower similar in massing to that of the State Armory three blocks to the east. Growth along Broadway continued at a slower pace into the first decades of the twentieth century, as reflected in the historic district by several excellent examples of period architectural design, discussed later in this narrative. Demolitions and alterations since 1935 have detracted from the physical and architectural integrity of some portions of the streetscape on Broadway. However, this broad avenue and its surviving buildings and streetscapes still reflect its historical role as Newburgh's late nineteenth century "main street," and help to illustrate the architecture and building practices of the late nineteenth century.

William Street, extending south from Broadway into some of the new neighborhoods being developed in the 1880s and 1890s, preserves much of its mixed residential and commercial flavor from this period. Retaining its brick paving, the street is lined on both sides with a combination of two- and three-story rowhouses and store buildings built between c. 1880 and c. 1910, often featuring the vestigial elements of the Italianate style

**United States Department of the Interior  
National Park Service****National Register of Historic Places  
Inventory—Nomination Form**

For NPS use only
received
date entered

East End Historic District, Newburgh,

Continuation sheet Orange County, New York Item number

8

Page 13

(segmentally arched windows and bracketed wooden cornices) as seen by the c. 1880 store building at 61 William Street or, in later examples, references to early twentieth century eclecticism, as illustrated by the modified Mission style store building at no. 84. Four brick rowhouses at 96-102 William Street are noteworthy as especially distinguished and rare examples of rowhousing in the Queen Anne style, featuring gable roofs which sweep continuously downward from the second story to shelter projecting front porches and unusual terra-cotta spandrel panels between the windows of the first and second story.

Although also present in the neighborhood west of DuBois and north of Broadway, the extensive rowhouse development which characterized this period in the city's history is most heavily concentrated in the southern portions of the historic district, especially along Benkard Avenue, Renwick St. and Carson Street. These rowhouses are narrow, and typically two to three stories in height, virtually all of them featuring a distinctive three-sided or curved projecting window bay. Often they are accompanied by Eastlake style bracketed cornices or Queen Anne style front porches with spindle-work friezes and balustrades. One variation identified with local architect Frank Estabrook incorporates a masonry porch with a Romanesque arch supported by slender colonnettes. Materials are also varied, some rowhouses featuring rock-faced stone lintels and sills; some featuring cut-stone lintel, sills, diamond-shaped spandrel panels and string courses; and still others displaying simple brick segmental arches above doors and windows. There is also variety in the detailing of cornices, some featuring simple recessed panels and brackets and others incorporating fish-scale shingles. As a whole, however, these rowhouses are architecturally significant as a distinctive residential type that appears to be unique to Newburgh, which with its bay windows and imaginative decorative variations, recalls the continuing influence of the Picturesque Movement in the city.

Significant residential architecture is also evident in the Washington Heights neighborhood which developed following its subdivision in 1887. Although brick rowhouses are also found in the northern and western portions of this neighborhood, its most distinctive residential type is the detached and turreted Queen Anne style house, often sited on prominent street corners or near the Bay View Terrace bluff in order to take advantage of the striking river views afforded at these locations. Representative examples include 69 South Liberty Street and 14 Overlook Place, both built c. 1890.

Growth at the end of the century is also manifested in the historic district by major commercial buildings erected in the 1890s and early 1900s in the vicinity of Broadway and Grand Street. Representative of the commercial architecture of this period is the 1893 Van Cleft Building at 77-79 Broadway, a four-story brick building with round-arched upper-story windows and a Queen Anne style cornice. The northeast corner of the same intersection is occupied by the Columbus Trust Co. (Key Bank) Building, built in 1902 and representing one of the finest and earliest example of Beaux-Arts style architecture present in the historic district. The bank building is



**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

For NPS use only  
received  
date entered

East End Historic District, Newburgh,

Continuation sheet Orange County, New York Item number 8

Page 14

distinguished by its arcaded first and second stories and its lavishly detailed corner entrance surrounded by limestone carving and surmounted by a clock. Other prominent high-style buildings of the late nineteenth century in the historic district include the Richardsonian Romanesque Tower of Victory designed by John A. Duncan and built near Washington's Headquarters between 1883 and 1887, and Grammar School No. 6, at 1-5 Liberty Street, designed by Frank Estabrook, also in the Richardsonian Romanesque style in 1891.

Newburgh's population continued to grow through the first two decades of the twentieth century, rising from 24,943 in 1900 to 30,366 in 1920. Some growth occurred after 1920, but almost none after 1935. Healthy growth between 1900 and 1920, boosted toward the end by World War I industrial production, is reflected in the historic district by the construction of imposing social and institutional buildings, including the Neoclassical style 1913 YMCA building at 54 Grand Street, the Neoclassical style 1915 Masonic Temple building next door at 46-52 Grand Street, the Georgian Revival style nurses' residence at St. Luke's Hospital, built at 186-194 First Street c. 1910, and the distinguished Georgian Revival style museum building at Washington's Headquarters, designed by Franklin B. Ware in 1910. Equally distinguished is the Georgian Revival style U. S. Post Office at 217 Liberty Street, built c. 1920.

Residential development through this period in the historic district also illustrates the popularity of historical eclecticism, perhaps inspired by renewed interest in Newburgh's colonial heritage. New subdivisions built in the northern section of the city at this time, on lands once occupied by large estates, include detached frame houses often modelled on the Dutch Colonial style, with gambrel rooflines and shed-roofed wall dormers, exemplified by 350 and 362 Grand Street, built c. 1920, as well as in a modified Georgian style, as exemplified by 346 Grand Street, built of brick with a columned entrance portico and a Palladian window c. 1910. Less popular but also evident in the Liberty Street-Grand Street neighborhood north of Broad Street are examples of the Mission style, Tudor Revival style and Arts and Crafts style. Many of the smaller houses in this neighborhood, as well as in later sections of the Washington Heights neighborhood, are relatively plain, box-like structures popularized by early twentieth century pattern books. As a whole, they reflect the continuing growth of the middle class in Newburgh through the 1920s; and a growing preference for the suburban lifestyle, formerly enjoyed only by the wealthy.

During Newburgh's final growth years, Broadway experienced a transition from pedestrian and streetcar oriented traffic and retail business to an automobile oriented commercial strip, encouraged in part by its unusually broad width, which easily accommodated on-street parking. Outstanding commercial architecture built in response to Broadway's growing commercial importance includes the Broadway Garage at 259 Broadway, built in c. 1930 with simplified classical detailing. Built for the city's Buick dealership, the building retains an unusually high degree of integrity, still featuring its

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

For NPS use only  
received  
date entered

Continuation sheet East End Historic District, Newburgh,  
Orange County, New York Item number 8

Page 15

its original Indiana limestone facade, terrazzo and travertine interiors and period signage. The Art Deco style is illustrated by the Kreisel furniture store at 121-123 Broadway, built c. 1932 and featuring a radiating mullion design, reinforced by a flat second-story architrave with radiating keystone and splayed "voussoirs." The Clark Street Diner, built within the historic district at 177-179 Broadway, c. 1935, is significant as Newburgh's only surviving streamlined Art Deco diner. The F. W. Woolworth store at 128-130 Broadway, built c. 1935, is significant as Newburgh's only representative example of a retail chain store building and illustrates the impact of twentieth-century mass marketing techniques, which by 1935 represented a serious challenge to small retail store operators. Its design reflects the influence of the Art Deco and Art Moderne styles and the common use during this period of buff colored brick and contrasting black carrara glass.

Newburgh experienced massive economic decline during and after the Great Depression, nowhere more evident than in the East End Historic District. The city lost one-third of its population between 1935 and 1980 and almost all of its manufacturing jobs. Abandoned industrial facilities fell into disrepair, burned or were eventually demolished, and many of the row-house neighborhoods became slums, residents and landlords no longer willing or able to perform required maintenance. Hundreds of historic buildings were demolished in the 1960s and 1970s leaving a void of open space between the historic district and the river. However, the adverse economic conditions have contributed to some degree to the architectural preservation of the surviving historic buildings in the district by preventing their capricious alteration. Although urban renewal caused extensive losses to the city's historic urban fabric, these losses have in recent years helped to focus public attention on Newburgh's rich history and architectural legacy. It is hoped that National Register listing of the East End Historic District will contribute to the public's understanding of these important resources and ultimately toward their preservation.

# 9. Major Bibliographical References

see continuation sheet

# 10. Geographical Data

Acreeage of nominated property 445

Quadrangle name Newburgh and Cornwall

Quadrangle scale 1:24,000

UTM References See continuation sheet

A 

--	--	--	--	--	--	--	--	--	--

  
 Zone Easting Northing

B 

--	--	--	--	--	--	--	--	--	--

  
 Zone Easting Northing

C 

--	--	--	--	--	--	--	--	--	--

D 

--	--	--	--	--	--	--	--	--	--

E 

--	--	--	--	--	--	--	--	--	--

F 

--	--	--	--	--	--	--	--	--	--

G 

--	--	--	--	--	--	--	--	--	--

H 

--	--	--	--	--	--	--	--	--	--

Verbal boundary description and justification

List all states and counties for properties overlapping state or county boundaries

state	code	county	code
			NA

# 11. Form Prepared By

name/title Neil Larson and Mark Peckham

organization Division for Historic Preservation date August, 1985

street & number Agency Building 1,  
Empire State Plaza

telephone 518/474-0479

city or town Albany

state New York

# 12. State Historic Preservation Officer Certification

The evaluated significance of this property within the state is:

national  state  local

As the designated State Historic Preservation Officer for the National Historic Preservation Act of 1966 (Public Law 89-665), I hereby nominate this property for inclusion in the National Register and certify that it has been evaluated according to the criteria and procedures set forth by the National Park Service.

State Historic Preservation Officer signature

title Deputy Commissioner for Historic Preservation

date 8/15/85

For NPS use only

I hereby certify that this property is included in the National Register.

date

Keeper of the National Register

Attest:

date

Chief of Registration

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

For NPS use only  
received  
date entered

East End Historic District, Newburgh, Orange  
Continuation sheet Co., New York

Item number 9

Page 1

Major Bibliographical References

Eager, Samuel W. An Outline History of Orange County, Newburgh: S.T. Callahan, 1846-1847.

Kowsky, Francis R. The Architecture of Frederick Clarke Withers and the Progress of the Gothic Revival in America after 1850, Middleton: Conn: Wesleyan University Press, 1980.

Nutt, John J. Newburgh, Her Institutions, Industries, and Leading Citizens, Newburgh: Ritchie and Hull, 1891.

Pierson, William H. Jr. American Buildings and Their Architects, Technology and the Picturesque. Garden City N.Y.: Doubleday and Co., 1978.

Ruttenber, E.M. and Clark, L.H. History of Orange County New York, Philadelphia: Everts and Peck, 1881.

**United States Department of the Interior  
National Park Service**


**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh, Orange Co.,

Continuation sheet New York

Item number 10

Page 1



UTM References:  
(All Zone 18)

	<u>Easting</u>	<u>Northing</u>
A	582700	4596220
B	582680	4595820
C	582830	4595800
D	582840	4595330
E	582800	4595320
F	582740	4594750
G	582690	4594760
H	582680	4594580
I	582670	4594460
J	582640	4594330
K	582820	4594310
L	582820	4594160
M	582680	4594180
N	582670	4594070
O	582740	4594060
P	582730	4593870
Q	582620	4593890
R	582640	4593730
S	582630	4593560
T	582460	4593440
U	582180	4593500
V	582220	4593880
W	582060	4593840
X	582080	4593930
Y	581840	4593950
Z	581850	4594090
AA	581980	4594080
BB	581980	4594170
CC	582040	4594160
DD	582070	4594510
EE	581710	4594540
FF	581710	4594590
GG	581860	4594580
HH	581870	4594620
II	581940	4594620
JJ	581950	4594780
KK	581900	4594780

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh, Orange Co., .

Continuation sheet New York

Item number 10

Page 2

For NPS use only  
received  
date entered

	<u>Easting</u>	<u>Northing</u>
LL	581900	4594870
MM	582080	4594870
NN	582080	4594810
OO	582160	4594800
PP	582160	4594880
QQ	582120	4594900
RR	582040	4594900
SS	582040	4594960
TT	581720	4594980
UU	581680	4595040
VV	581710	4595350
WW	582120	4595300
XX	582140	4595560
YY	582500	4595380
ZZ	582470	4595720
AAA	582390	4595720
BBB	582390	4595830
CCC	582470	4595830
DDD	582420	4596290
EEE	582420	4596420

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh, Orange Co.,

Continuation sheet

New York

Item number

10

Page

3

For NPS use only
received
date entered

Verbal Boundary Description and Justification

Specially, the historic district boundary begins near the city's northern boundary at the south side of North Street, and proceeds clockwise along the southwest side of the LeRoy Place to Grand Street, where it crosses LeRoy to include significant properties at 13 through 31 LeRoy, following rear and side lot lines of those properties before returning to the southwest side of LeRoy. Excluded from the boundary at this side to the north and east are a modern apartment complex and a group undistinguished, twentieth-century suburban residences.

Continuing southward along the east side of the historic district, the boundary first turns west along the north side of Nicoll Street and then south along the rear and/or side lot lines of 342-400 Grand Street until it reaches the south side of Broad Street. The boundary then turns east on Broad Street and continues approximately 100 feet east of Montgomery Street, where it once again turns south, following the rear and or side lot lines behind 158-358 Montgomery Street. Excluded from the district at this point is a group of undistinguished twentieth-century residences and a recently completed condominium project on Water Street. The boundary turns west along the south lot line of 158 Montgomery Street and crosses Montgomery Street before turning south and paralleling the west side of the street to First Street. East of Montgomery Street in this vicinity, the boundary excludes an extensive complex of modern three-story apartment buildings and one modern nine-story apartment tower.

At First Street, the boundary turns west, following the north side of the street to Grand Street, where it turns south and parallels the east side of street. At 54 Grand Street, the boundary turns east, following the north lot line of 54 Grand Street to High Street, where it turns south along the west side of the street before returning west along the south lot line of 54 Grand Street. The boundary then turns south to Broadway, following the rear lot lines of 42-62 Grand Street. The construction of the boundary in this vicinity excludes vacant land immediately to the east.

Continuing southward after Broadway, the boundary follows the east lot line of 75 Broadway and then the south lines of 75, 77, and 79 Broadway west to Grand Street, where it again turns south. The boundary extends south along the east side of Grand Street to 14 Grand Street where it follows the rear and side lot lines of 4-14 Grand Street to Washington Street. The boundary crosses Washington Street and extends east along the south side of the street to Water Street, where it turns south along the west side of the street. At the south lot line of 80-88 Colden Street, the boundary turns west, crossing Colden Street and following a portion of the south lot line of the Washington's Headquarters property to Edward Street where it turns south and

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh, Orange Co.,  
New York

For NPS use only  
received  
date entered

Continuation sheet

Item number

10

Page

4

extends along the west side of Edwards to William Street. Here the boundary includes significant townhouses on Grand Street, the Washington's Headquarters property and a historic paint and paper box plant on Colden Street, while excluding vacant land immediately to the east and a c. 1970 public safety building on the east side of Grand Street between Broadway and Washington Street.

At William Street the boundary turns east along the south side of the street to the rear lot lines of 20-38 Edwards Street where it again turns east along the north lot line of 1-13 Colden Street back to the west side of Colden Street where it again turns south, continuing to Renwick Street. At Renwick, the boundary follows the north side of the street as far west as No. 58 Renwick, where it turns south along the rear and side lot lines of 65 Renwick, 1-3 Riverview Place and 8 Overlook Place. Here, as before, the boundary is drawn to include concentrations of historic buildings, while excluding vacant land immediately to the east.

Continuing clockwise from the intersection of Overlook Place and Bay View Terrace, the boundary continues along the grassy park area on the east and south sides of Bay View Terrace, defining the southern edge of the district before turning north along the east side of Monument Street. In this area, the boundary encloses a major portion of the late nineteenth century Washington Heights subdivision while excluding the steep, undeveloped bluffs immediately east and south of Bay View Terrace. West of Monument, the boundary excludes a mix of modern and undistinguished houses and South Junior High School, built in 1930 and compromised by several large and incompatible modern additions.

North of Carson Street, the boundary proceeds west along the rear lot lines of 157-169 Renwick Street to Clark Street, where it turns a short distance south along the east side of the street before returning to its westward course to William Street along the rear and side lot lines of excluded properties on the north side of Carson between Clark Street and William Street. At William Street, the boundary turns north, following the east side of the street to Renwick Street where it again turns west along the north side of the street. In this vicinity, the boundary reflects the transition from compact, late nineteenth and early twentieth century housing stock within the district, to small and non-descript commercial buildings, garages and altered houses outside of and southwest of the district in the general area of Bridge Street.



**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

East End Historic District, Newburgh, Orange Co.,  
Continuation sheet New York

Item number 10

Page 5

For NPS use only  
received  
date entered

West of Avoca Street on Renwick, the boundary turns north, following the rear lot line of St. Francis Church north to Benkhard Avenue. It crosses Benkhard immediately west of No. 148 and proceeds along that property's west lot line before turning east along the rear lot lines of 108-148 Benkhard Avenue crossing Avoca in the process. The boundary then turns north along the west lot line of 211 South William Street before crossing South William and continuing north along the west lot line of 208 South William Street. It then turns east until it meets the rear lot line of 78-80 William Street where it turns north and follows the rear and side lot lines of 14-76 William Street four block blocks north to Ann Street. All properties west of William Street on the perpendicular streets Hasbrouck, Parmenter, Washington, and Ann are excluded by this boundary. Within the district, William Street, with its intact commercial streetscape, forms a logical edge at the west side of the district, defining the westernmost extent of intact and contiguous historic urban development. In general the boundary described above reflects the higher incidence of altered buildings, vacant or paved lots or lack of architectural all or historically significant buildings outside the district. In isolated cases, several historic buildings are located in this area; however, the presence of intervening intrusions prevents their inclusion in the district.

North of Ann Street, the boundary follows the west line of 12 William Street before turning west where it follows the rear and/or side lot lines of 197-285 Broadway. At 285 Broadway, the westernmost extent of the historic district, the boundary turns north along the west lot line of that property and then east along the south side of the street. At 259 Broadway, the boundary turns north, crossing the street and following the west lot line of 242 Broadway and the rear lot lines of 236-242 Broadway crossing Carpenter Avenue before turning north to Van Ness. The boundary then follows the rear lot lines of 23-45 Lutheran Street before turning west to Carpenter along the rear lot lines of 255-263 First Street. Here, as in the areas west of William Street, the boundary separates concentrations of significant rowhouses and commercial buildings from areas characterized by vacant land, parking lots, altered historic buildings and, especially on Broadway, modern intrusions.

Continuing clockwise, the boundary extends north along the east side of Carpenter, crossing First Street, and then following the rear and side lot lines of 226-264 First Street south to City Terrace. The boundary then turns south to the south side of First Street and then east to the east side of DuBois Street where it turns north. At 75 DuBois the boundary turns west along the south boundary of 75 DuBois Street and thence north along the west boundary of 75-77 DuBois Street to the north side of Carter Street. The boundary turns west along the north side of Carter Street across City Terrace to the rear property line of 79-81 City Terrace before turning north along

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**


East End Historic District, Newburgh, Orange Co.,  
Continuation sheet New York Item number 10

For NPS use only
received
date entered

Page 6

the rear property lines of 79-93 City Terrace. This boundary along First, DuBois and Carter Streets was drawn to exclude a nearly block square area leveled for a parking lot (only 75-77 DuBois Street remains) by the neighboring hospital. The boundary then proceeds west along the rear lot lines of 215-291 Third Street turning north along the side lot line of 291 to the north side of Third Street where it turns west to Robinson Avenue. At Robinson it turns north along the east side of the street corresponding to the west edge of Downing Park. At South Street, the boundary turns east, along the south side of the street, following the northern edge of Downing Park. The boundary then turns north along the rear and side lot lines of 183-233 DuBois Street. In this area, Downing Park defines the western extent of the district along with an intact row of late nineteenth century residences along Third Street, facing the park. A series of undistinguished twentieth-century residences and heavily altered late nineteenth century residences along the west side of Robinson and the north side of South Street preclude extension of the district further west or north of the Park. West of DuBois Street, a marked decrease in density and a larger percentage of non-historic houses limits the district to those properties fronting on DuBois Street, south of Gidney.

At Gidney Avenue, the boundary turns southeast along the southwest side of the street except at the intersection of DuBois, where it includes the significant buildings at 236 and 238 DuBois and 88 and 90 Gidney. At Chambers Street, the district boundary turns north, following the side and rear lot lines of 24 Gidney and 333-421 Liberty, respectively. At the campus of Mount Saint Mary's College, the boundary continues 400 feet north from the northwest corner of the lot at 421 Liberty Street, paralleling Liberty Street at a 100 foot depth before turning 90 degrees east, where it proceeds for 400 feet. At this point, the boundary turns north 90 degrees for 300 feet, east 90 degrees for 400 feet and north 90 degrees where it again parallels Liberty Street at a depth of 100 feet. At Elmwood Place, the boundary turns west at the north side of the street until it reaches the rear lot line of 563 Liberty Street turning north again, and following the rear lot lines of 563-577 Liberty. In this vicinity, the boundary is largely defined by contributing residential development along Liberty Street and modern non-contributing institutional development west of Liberty on the campus of Mount Saint Mary's College. A portion of the campus, including a historic villa and carriage barn, is included within the district, based upon the architectural and historical significance of this property and its historical relationship to the development of Liberty Street. After proceeding north along the rear lot lines of 563-577 Liberty, the boundary returns to its starting point at North Street.

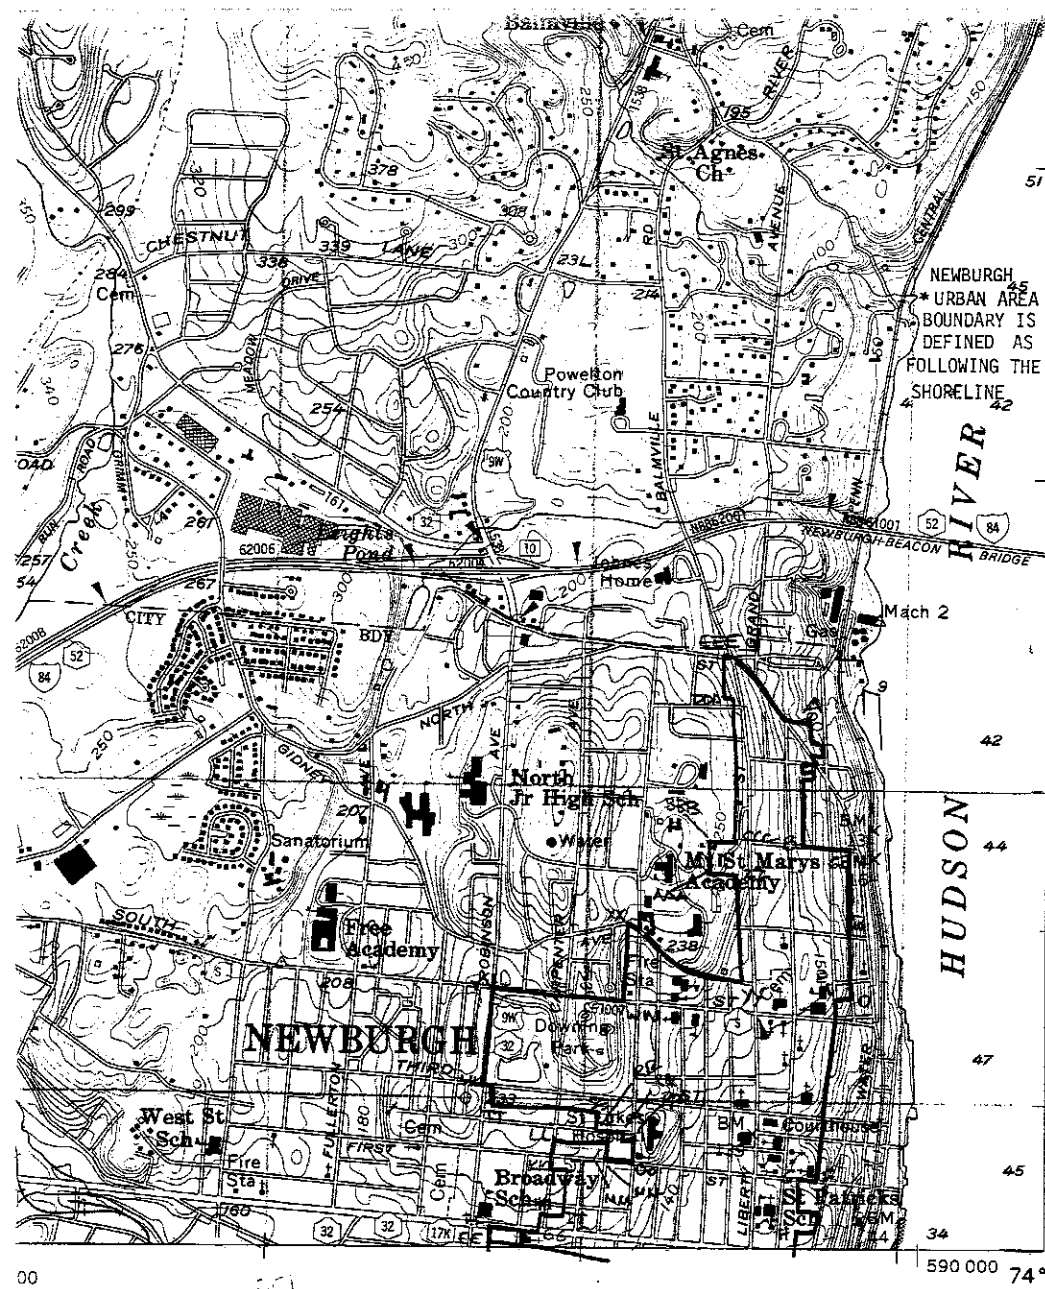

East End Historic District  
 Newburgh, Orange Co., NY  
 UTM References:


(All Zone 18)

	<u>Easting</u>	<u>Northing</u>
A	582700	4596220
B	582680	4595820
C	582830	4595800
D	582840	4595330
E	582800	4595320
F	582740	4594750
G	582690	4594760
H	582680	4594580
EE	581710	4594540
FF	581710	4594590
GG	581860	4594580
HH	581870	4594620
II	581940	4594620
JJ	581950	4594780
KK	581900	4594780
LL	581900	4594870
MM	582080	4594870
NN	582080	4594810
OO	582160	4594800
PP	582160	4594880
QQ	582120	4594900
RR	582040	4594900
SS	582040	4594960
TT	581720	4594980
UU	581680	4595040
VV	581710	4595350
WW	582120	4595300
XX	582140	4595560
YY	582500	4595380
ZZ	582470	4595720
AAA	582390	4595720
BBB	582390	4595830
CCC	582470	4595830
DDD	582420	4596290
EEE	582420	4596420

**BOUNDARIES:**  
 State.....  
 County.....  
 Town or City.....  
 Incorporated Village.....  
 Federal-Aid Urban Area.....


**ROADS:**  
 Touring Route markers:  
 Interstate.....  
 U. S.....  
 State.....  
 State Highway number and limit.....  
 County road.....  
 Interchange number.....  
 Divided highways and streets:  
 Wide mall.....  
 Narrow mall or barrier.....  
 Undivided highways and streets:  
 4 or more lanes.....  
 Less than 4 lanes.....  
 Vehicle track; trail.....

INDEX TO  
 9600 (1" = 800')  
 AP COVERAGE



CORNWALL QUADRANGLE  
 NEW YORK  
 7.5 MINUTE SERIES (TOPOGRAPHIC)

6267 III SW  
 (WAPPINGER'S FALLS)

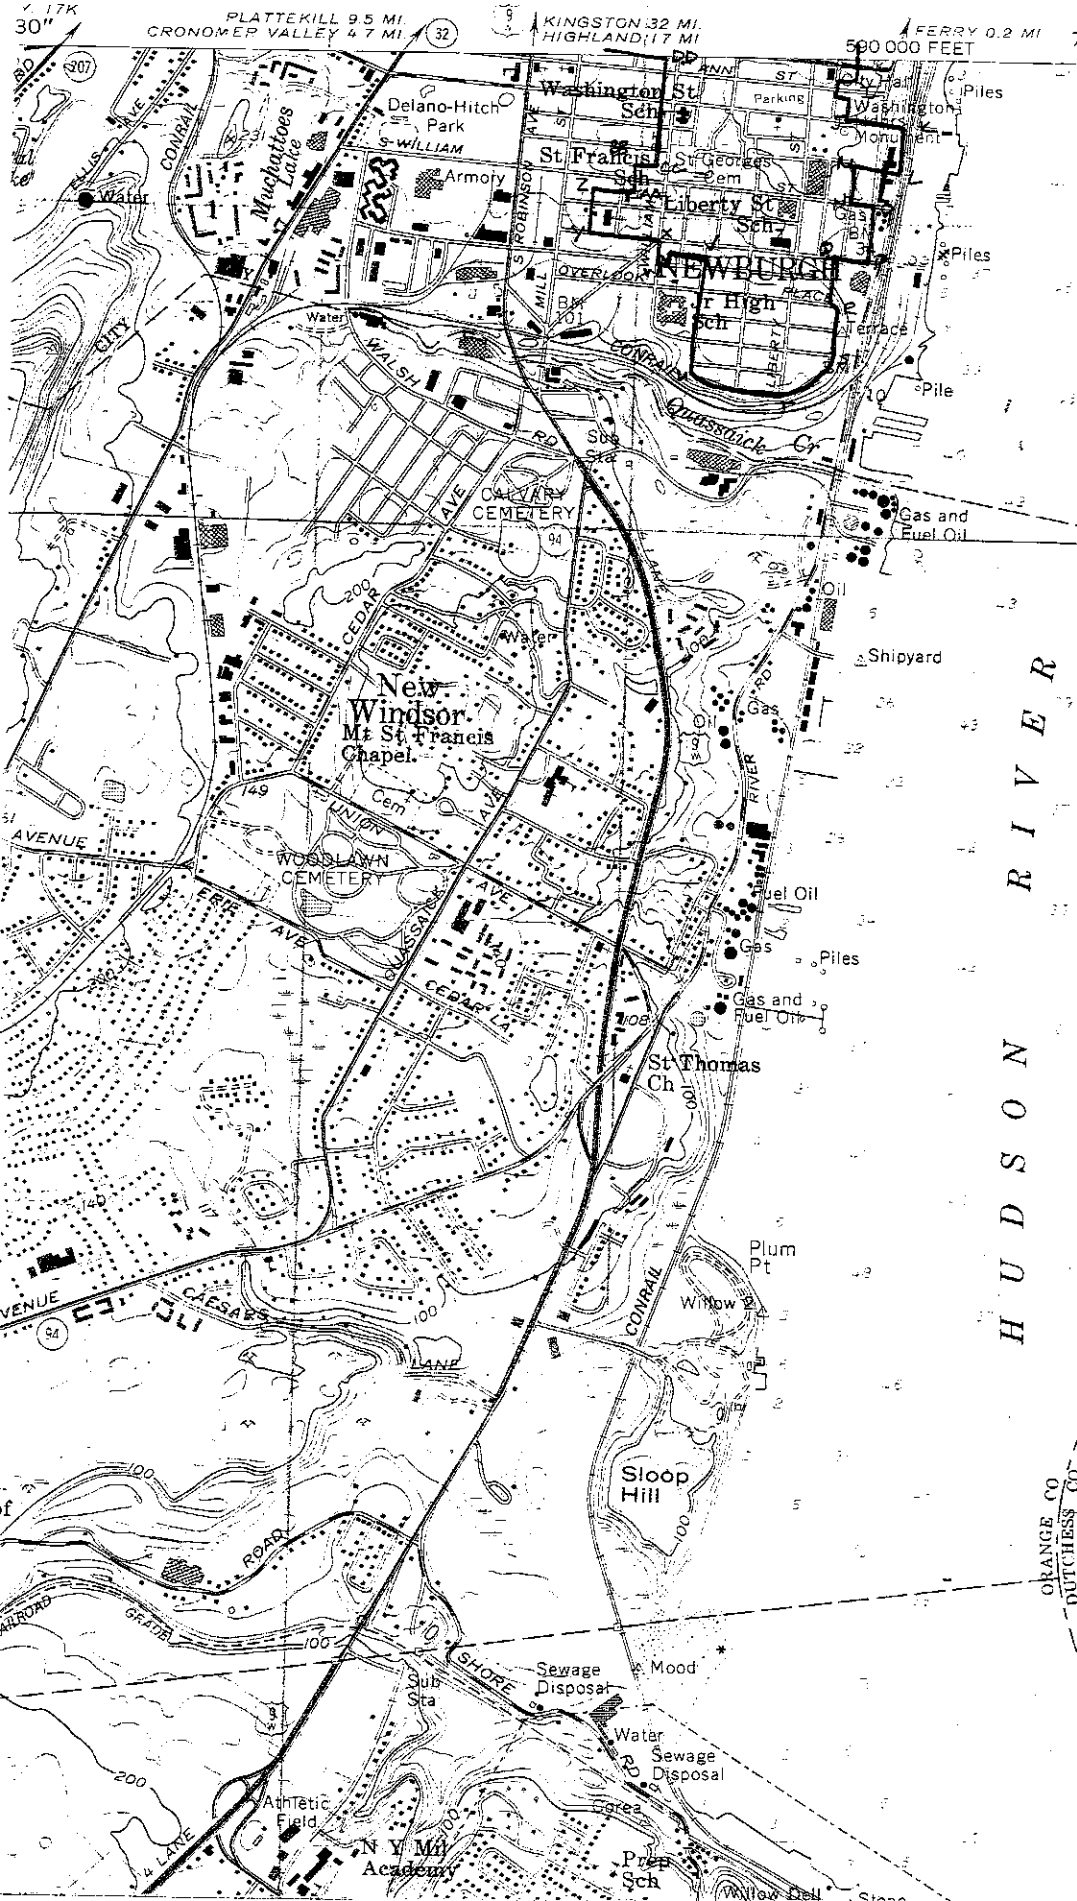

East End Historic District  
 Newburgh, Orange Co., NY  
 UTM References:

(All Zone 18)

590 000 FEET  
 540 000 FEET  
 4594  
 4593  
 4592  
 4591  
 4590  
 27'30"  
 4589

	<u>Easting</u>	<u>Northing</u>
I	582670	4594460
J	582640	4594330
K	582820	4594310
L	582820	4594160
M	582680	4594180
N	582670	4594070
O	582740	4594060
P	582730	4593870
Q	582620	4593890
R	582640	4593730
S	582630	4593560
T	582460	4593440
U	582180	4593500
V	582220	4593880
W	582060	4593840
X	582080	4593930
Y	581840	4593950
Z	581850	4594090
AA	581980	4594080
BB	581980	4594170
CC	582040	4594160
DD	582070	4594510

H U D S O N R I V E R

ORANGE CO  
 DUTCHESS CO



Property Name *East End Historic District*  
Location *City of Newburgh, Orange County, New York*

**NATIONAL REGISTER OF HISTORIC PLACES  
CONTINUATION SHEET**

Addendum

---

**8. Addendum**

Documentation for the East End Historic District in Newburgh was completed by New York State Historic Preservation Office staff in 1985. At that time the period of significance chosen for the district's significance was terminated at 1935, reflecting the standard 50-year cut-off used in evaluating National Register-eligible resources. A survey of available contemporary street directories from the period 1921 through 1946, and census population research through 2000 indicate that there is a strong basis for extending the period of significance through at least 1950.

A survey of city directories covering addresses between Liberty and Johnston Streets shows that within the district the Broadway corridor continued to be an important business center, and buildings continued to be constructed and renovated. From 1920 through 1950, the population of the city continued to grow, albeit at a modest 5%. It was not until the 1960s and 1970s, when the city lost nearly a quarter of its population, that Newburgh lost its vitality. This period of population loss coincides with the construction of the Newburgh-Beacon Bridge, and Interstate 84 in the early 1960s, which bypassed downtown Newburgh, and was a major factor in the decline of the commercial viability of lower Broadway.

The Hotel Newburgh building at 107-117 Broadway, a longtime Newburgh institution, underwent significant reconstruction in the early 1940s. Other buildings were also renovated during the period between 1935 (the original end date of the period of significance) and 1950 (the proposed end date of the period significance), as businesses opened and closed up and down Broadway. These redeveloped buildings represent the continued viability of Newburgh during the between-war period. They also indicate the growing influence of automobile transportation. Indeed, the Broadway commercial corridor was a major center of automobile-related business from the 1920s forward (e.g, automobile dealerships, parts suppliers and garages), as well as home to numerous department stores (e.g. Sears and Woolworth's), and furniture and clothing stores that would have drawn customers from the surrounding area. The Broadway corridor continued to thrive as a commercial and residential district throughout this period.

The Hotel Newburgh occupies a complex of seven buildings fronting on both Broadway and Ann Street, with an exposed side (east) elevation fronting onto a now-vacant lot. The buildings which make up the hotel complex were constructed in phases between the 1880s and the 1920s, and the Broadway façade was rebuilt and unified ca. 1939-1941. The Broadway portion of the building is a four-story steel-frame and red brick building with understated Colonial Revival-style details, including key-stoned window openings and a balustraded parapet. The Ann Street portion of the Hotel Newburgh (106 through 112 Ann Street) consists of six buildings that were constructed between the 1880s and the 1920s. All of these buildings have utilitarian common-brick facades that express their period of construction and utilitarian function. The Hotel Newburgh site was home to two theaters and a hotel from approximately 1913 onward, and, beginning in 1934, a Sears Roebuck

Property Name *East End Historic District*  
Location *City of Newburgh, Orange County, New York*

**NATIONAL REGISTER OF HISTORIC PLACES  
CONTINUATION SHEET**

Addendum

---

Department store. Historic images attest to the prominent visual role this building has always enjoyed as part of the streetscape of Broadway. Although the Broadway storefronts and Ann Street entries have been modified since c. 1939-41, the building retains a considerable amount of its exterior historic fabric and period architectural character on both façades.

One building identified as having been constructed within the District after the original period of significance was the Art Deco-style commercial building at 106 Broadway (probably ca. 1932 to 1936). 106 Broadway is a two-story brick building, with an altered storefront, portions of which are possibly original. The second story of the building is three bays wide, with a large center bay comprised of a double window flanked by two single openings at the side. The building, with its broken, coped parapet, is typical of smaller commercial structures of the late 1930s and early 1940s. As one of few examples of its type from this period in the district, it has been re-assessed as a contributing component given the new end-date of the period of significance.

Resources re-evaluated as contributing to the East End Historic District's period of significance:

106 Broadway  
107-17 Broadway, The Hotel Newburgh

\_\_\_\_\_  
Signature of Certifying Official  
Bernadette Castro, New York State Historic Preservation Officer